
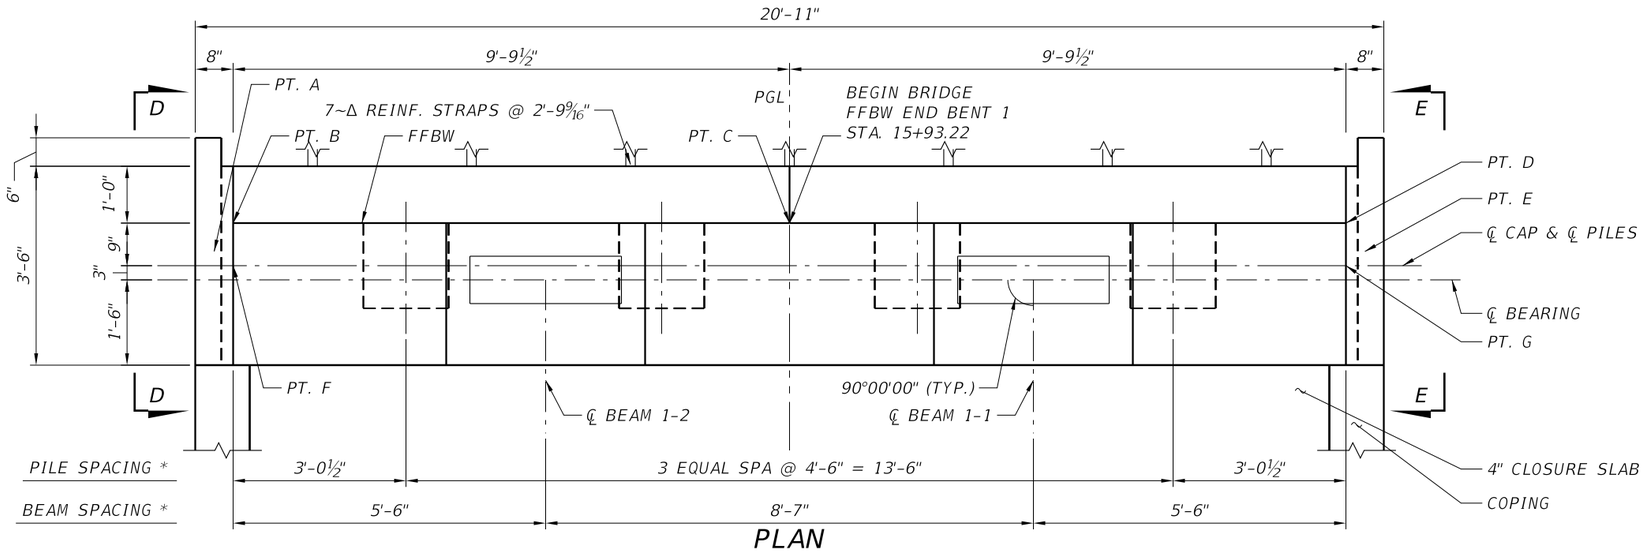


PLAN

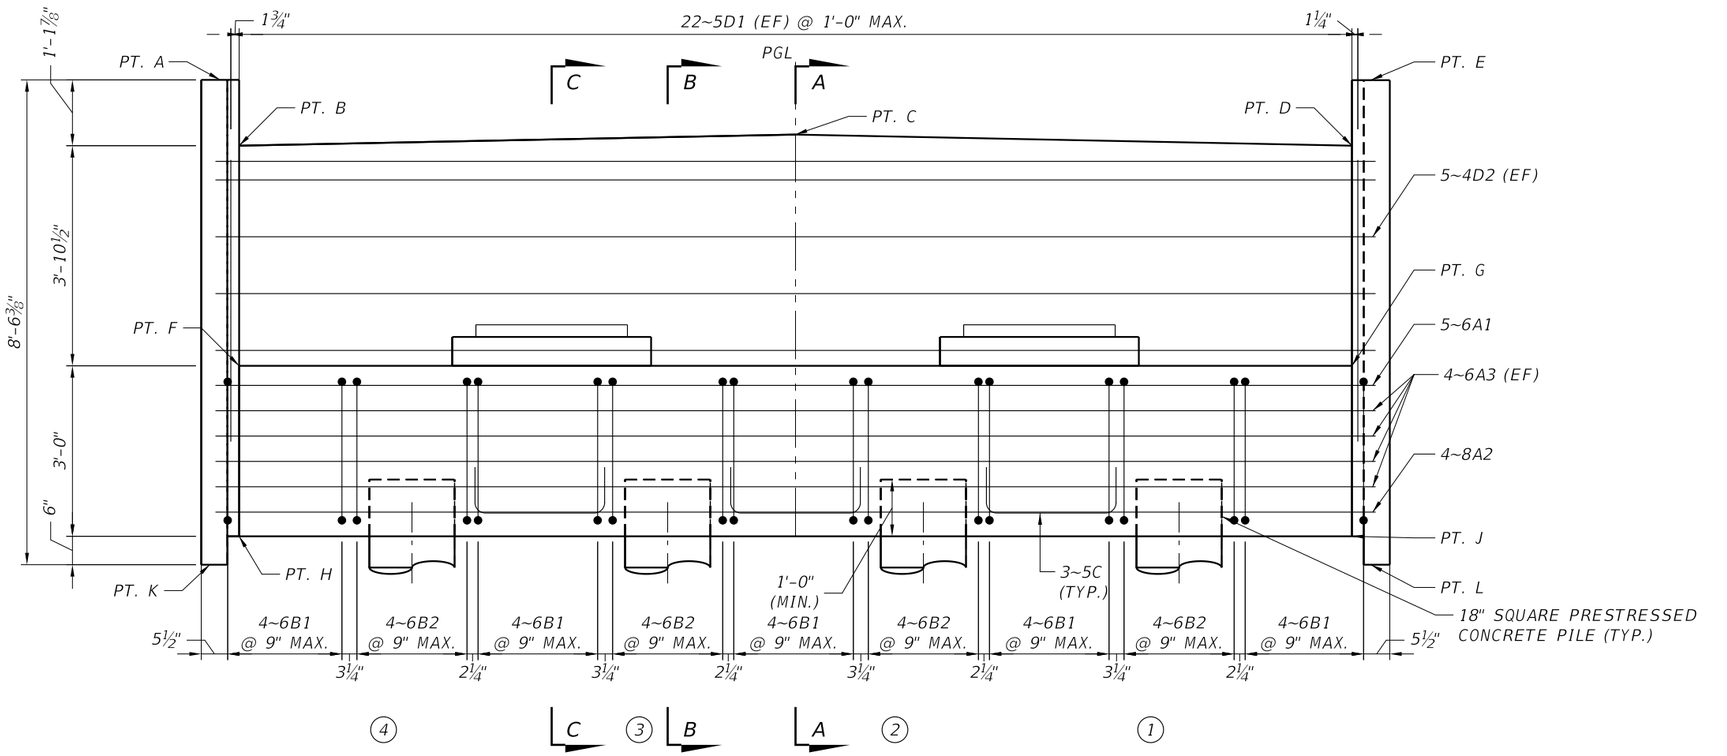

* DIMENSIONS MEASURED ALONG FFBW

ELEVATION

(LOOKING BACK STATION)

DIRECTION OF STATIONING

TABLE OF ELEVATIONS	
POINT	ELEVATION
A	48.269
B	47.111
C	47.307
D	47.111
E	48.265
F	43.238
G	43.238
H	40.238
J	40.238
K	39.738
L	39.738

PILE CUTOFF ELEVATIONS		
PILE NO.	CUTOFF EL.	PGL OFFSET
1	41.2	-6'-9"
2	41.2	-2'-3"
3	41.2	2'-3"
4	41.2	6'-9"

NOTES:

1. STIRRUP SPACING IS DIMENSIONED TO BAR CENTERLINES.
2. REINFORCEMENT IS SHOWN REPRESENTATIVELY: THE FIRST AND LAST BAR OF EACH RUN ARE DRAWN.
3. FOR SECTIONS A-A AND B-B AND DETAILS "A" AND "B", SEE SHEET B4-7. FOR SECTION C-C AND VIEWS D-D AND E-E, SEE SHEET B4-8. FOR SECTIONS F-F AND G-G AND PEDESTAL DETAILS, SEE SHEET B4-9.
4. FOR THE SOIL REINFORCEMENT (Δ) LEGEND, SEE SHEET B4-7.
5. FOR REINFORCING BAR LIST, SEE SHEET B4-21.
6. PILE OFFSETS ARE FROM THE PGL, + TO THE RIGHT LOOKING UP-STATION. CUTOFF ELEVATIONS ARE TO THE NEAREST 0.1 FT.

BRIDGE NO. 729022

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

MATTHEW IAN KOSAR
LICENSE NUMBER: 77008
PARSONS TRANSPORTATION GROUP, INC.
1203 GOVERNORS SQUARE BLVD,SUITE 201
TALLAHASSEE, FL 32301

DRAWN BY: MH 07-26
CHECKED BY: JT 07-26
DESIGNED BY: JT 07-26
CHECKED BY: MIK 07-26

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION


ROAD NO.	COUNTY	FINANCIAL PROJECT ID
SR 9	DUVAL	432259-5-52-01

SHEET TITLE: END BENT 1

REF. DWG. NO.:


PROJECT NAME: I-95 CAPACITY IMPROVEMENTS FROM SOUTH OF SR 152 TO SOUTH OF SR 126

SHEET NO.: B4-6

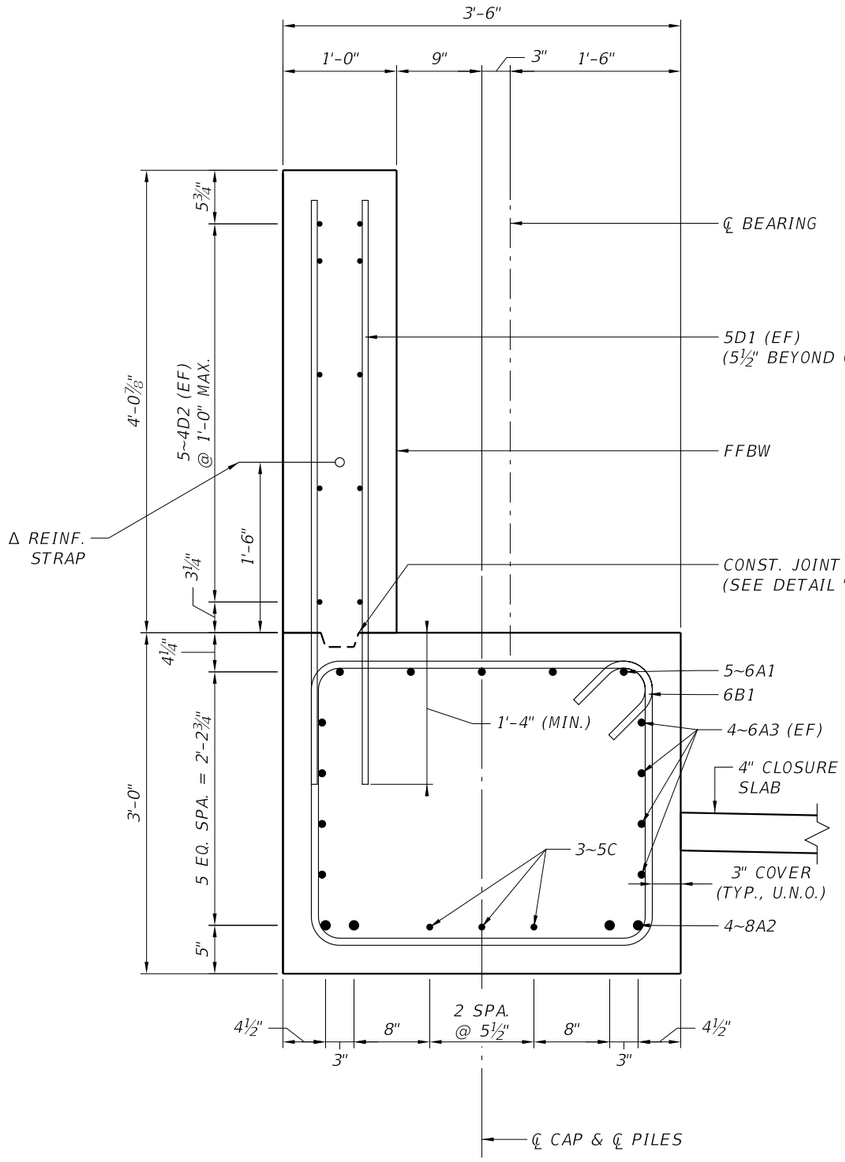


SECTION A-A

(SECTION BETWEEN PILES)

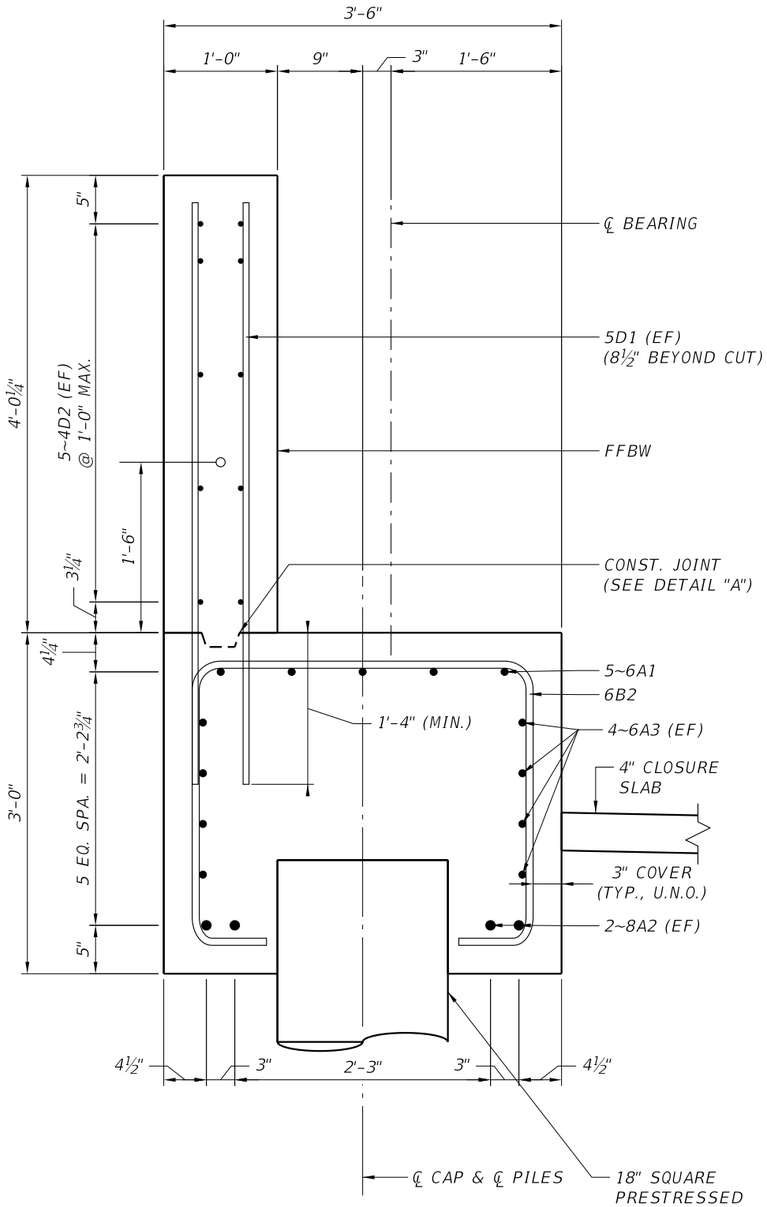


SECTION B-B

(SECTION AT PILES)

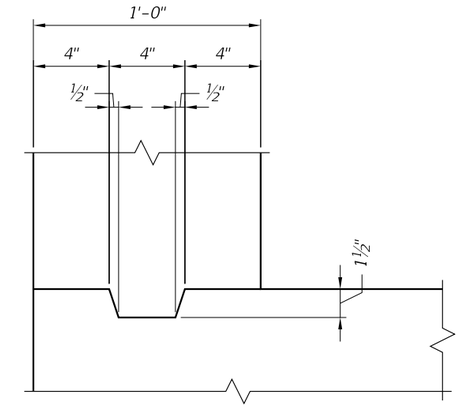

DETAIL "A"

(CONSTRUCTION JOINT)

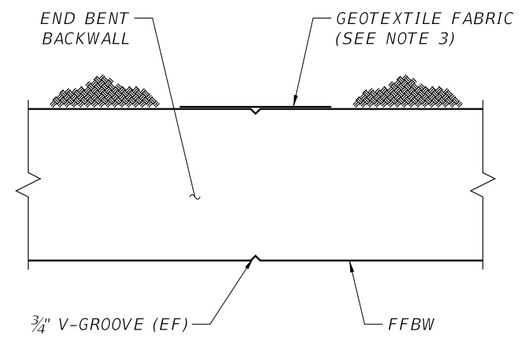

DETAIL "B"

(END BENT BACKWALL V-GROOVE)

LEGEND:

Δ REINFORCING STRAPS AND ATTACHMENTS FOR THE END BENT SHALL BE DESIGNED AND FURNISHED BY THE PROPRIETARY WALL PROVIDER. THE STRAPS SHALL BE DESIGNED TO RESIST A SERVICE LOAD OF 3.09 K/FT AND A FACTORED LOAD OF 3.74 K/FT (STRENGTH I) PERPENDICULAR TO THE END BENT BACKWALL.

NOTES:

1. FOR LOCATION OF SECTIONS, SEE SHEET B4-6.
2. ALL BARS ARE SHOWN IN SECTIONS; BARS IN THE SECTION PLANE ARE THE NEAREST BAR OF THEIR SERIES WITHIN 1'-3" BEYOND THE CUT.
3. ATTACH TYPE D-5 (SPECIFICATIONS SECTION 985) GEOTEXTILE FABRIC, 1'-0" WIDE AND FULL HEIGHT OF FILL, TO THE BACK OF BACKWALL AT V-GROOVE LOCATIONS WITH AN ADHESIVE APPROVED BY THE ENGINEER.
4. MODEL CHECK (REMOVE BEFORE ISSUE): DETAILS "A" AND "B" ARE SCHEMATIC; THE CONSTRUCTION JOINT KEY AND THE V-GROOVE LOCATIONS ARE NOT IN THE CAD MODEL.
5. FOR REINFORCING BAR LIST, SEE SHEET B4-21.

BRIDGE NO. 729022

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

MATTHEW IAN KOSAR
LICENSE NUMBER: 77008
PARSONS TRANSPORTATION GROUP, INC.
1203 GOVERNORS SQUARE BLVD,SUITE 201
TALLAHASSEE, FL 32301

DRAWN BY: MH 07-26
CHECKED BY: JT 07-26
DESIGNED BY: JT 07-26
CHECKED BY: MIK 07-26

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID
SR 9	DUVAL	432259-5-52-01


SHEET TITLE: END BENT 1 DETAILS (1 OF 3)

REF. DWG. NO.:

PROJECT NAME: I-95 CAPACITY IMPROVEMENTS FROM SOUTH OF SR 152 TO SOUTH OF SR 126


SHEET NO.: B4-7

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

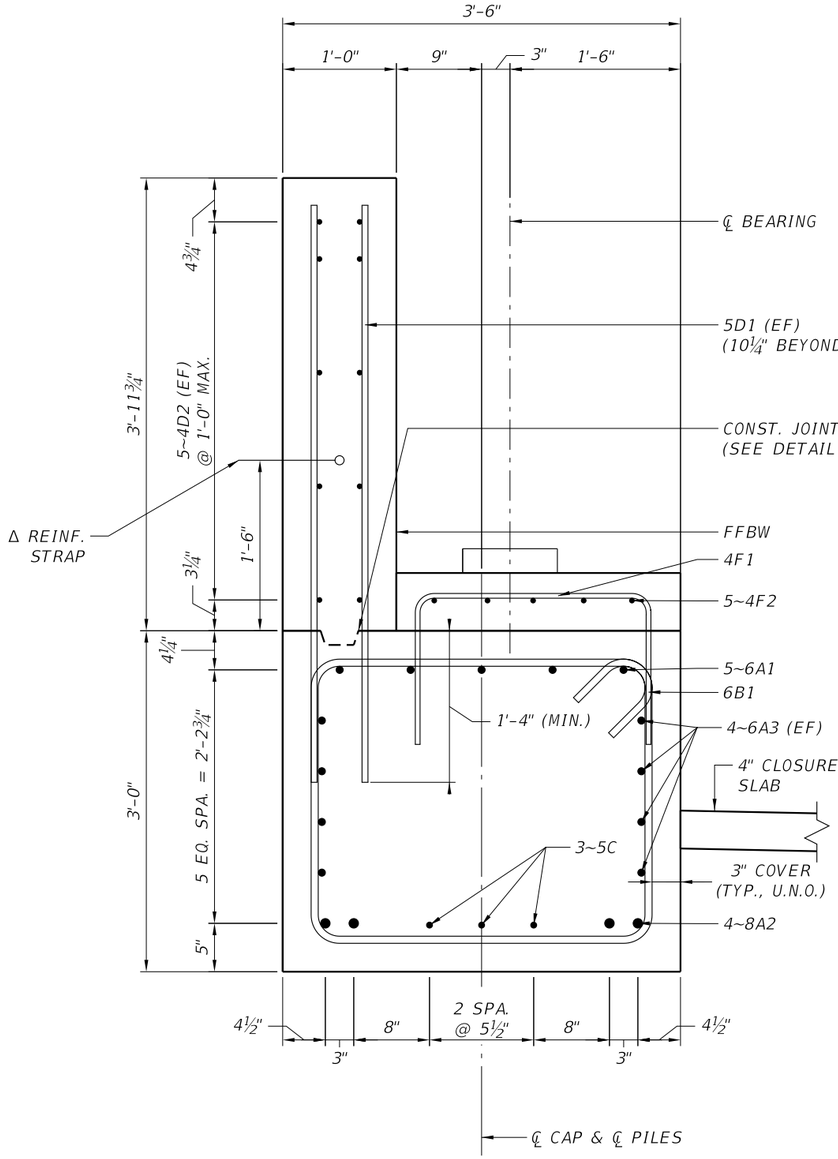


SECTION C-C

(SECTION AT CENTERLINE OF BEAM)

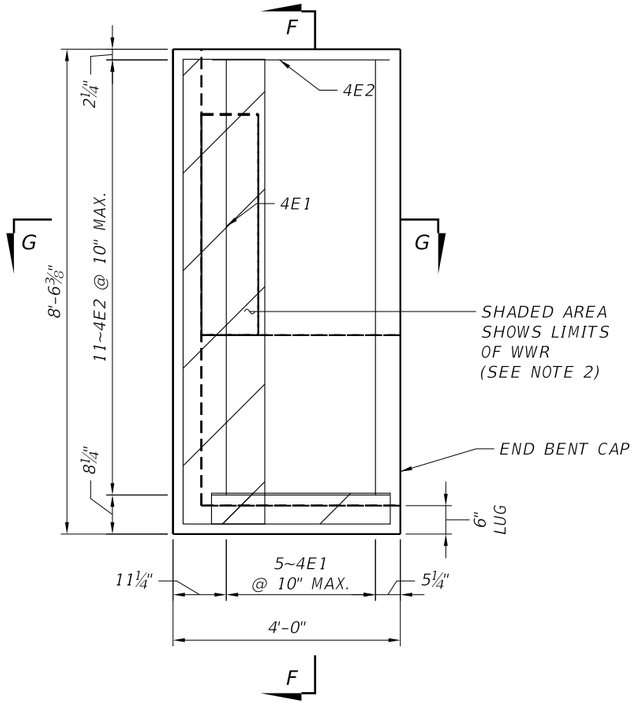

VIEW D-D

(LEFT CHEEK WALL)

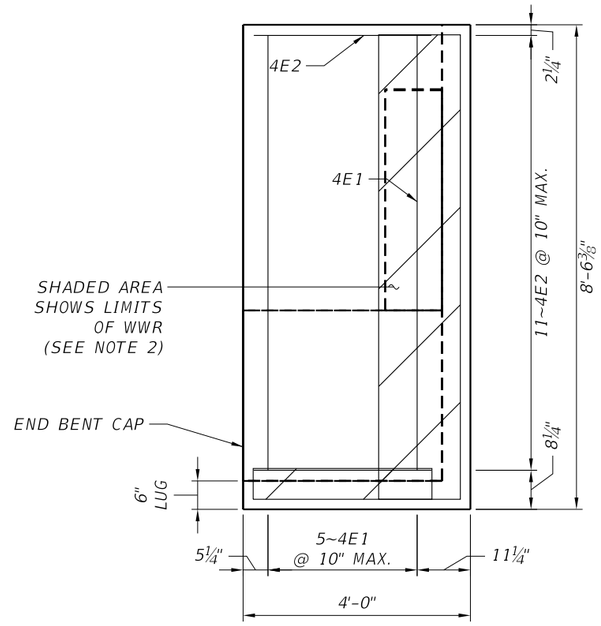

VIEW E-E

(RIGHT CHEEK WALL)

NOTES:

1. FOR LOCATION OF SECTION C-C AND VIEWS D-D AND E-E, SEE SHEET B4-6.
2. WELDED WIRE REINFORCEMENT (WWR) 4x4-W1.4xW1.4 IN THE CHEEK LUGS SHALL BE TIED TO THE END BENT REINFORCING STEEL.
3. FOR CHEEK TOP ELEVATIONS, SEE THE TABLE OF ELEVATIONS, SHEET B4-6.
4. SECTIONS F-F AND G-G ARE LOCATED IN VIEW D-D; FOR SECTIONS F-F AND G-G, SEE SHEET B4-9.
5. FOR THE Δ REINFORCING STRAP LEGEND, SEE SHEET B4-7.
6. MODEL CHECK (REMOVE BEFORE ISSUE): THE BACKWALL TOP IS LEVEL ACROSS THE WALL THICKNESS IN THE CAD MODEL (ITS SLOPE RUNS ALONG THE BENT TO THE CROWN ONLY); THE SECTIONS SHOW THE MODEL. ADD THE CROSS SLOPE TO THE MODEL.
7. FOR REINFORCING BAR LIST, SEE SHEET B4-21.

BRIDGE NO. 729022

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

MATTHEW IAN KOSAR
LICENSE NUMBER: 77008
PARSONS TRANSPORTATION GROUP, INC.
1203 GOVERNORS SQUARE BLVD,SUITE 201
TALLAHASSEE, FL 32301

DRAWN BY: MH 07-26
CHECKED BY: JT 07-26
DESIGNED BY: JT 07-26
CHECKED BY: MIK 07-26

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION


ROAD NO.	COUNTY	FINANCIAL PROJECT ID
SR 9	DUVAL	432259-5-52-01

SHEET TITLE: END BENT 1 DETAILS (2 OF 3)

REF. DWG. NO.:


PROJECT NAME: I-95 CAPACITY IMPROVEMENTS FROM SOUTH OF SR 152 TO SOUTH OF SR 126

SHEET NO.: B4-8

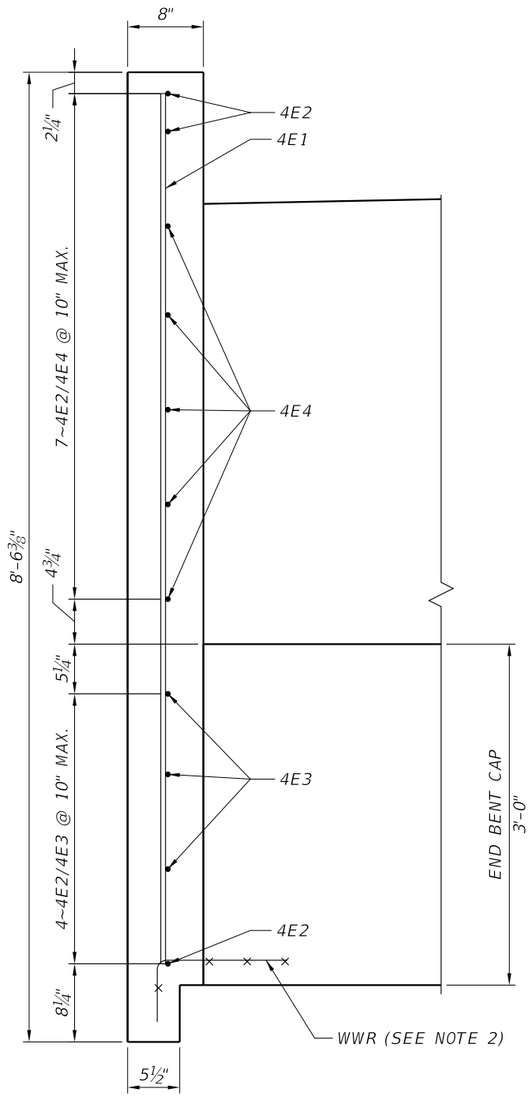


SECTION F-F

(THROUGH CHEEK WALL)

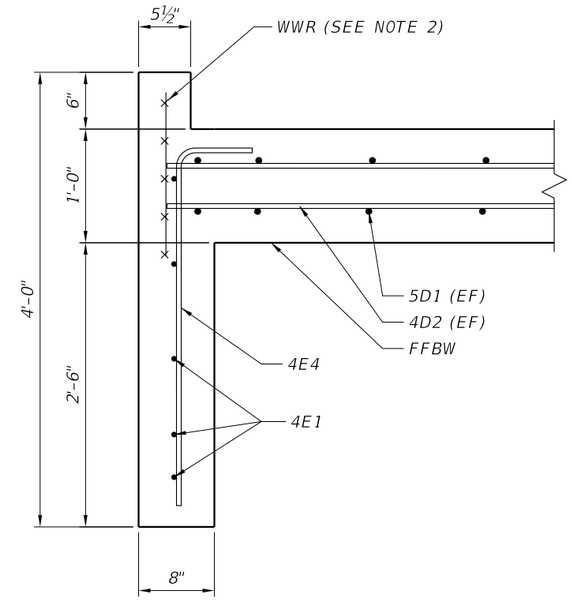

SECTION G-G


(THROUGH CHEEK WALL AND BACKWALL)

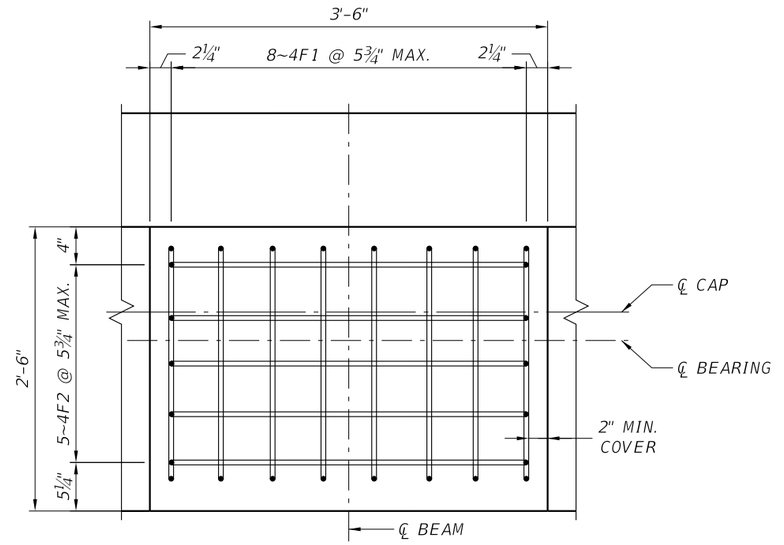

PEDESTAL PLAN

(BEAM LINE 1 SHOWN; BAR SPACING MAY BE ADJUSTED TO CLEAR THE CAP REINFORCEMENT)

TOP OF PEDESTAL ELEVATIONS	
BEAM NO.	ELEVATION (FEET)
1-1	43.746
1-2	43.746

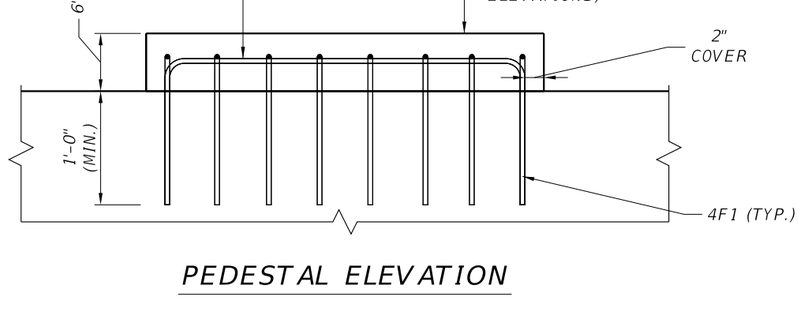

PEDESTAL ELEVATION

NOTES:

1. FOR LOCATION OF SECTIONS F-F AND G-G, SEE VIEW D-D, SHEET B4-8; SECTIONS F-F AND G-G SHOW THE LEFT CHEEK WALL, THE RIGHT CHEEK WALL IS SIMILAR (MIRRORED).
2. WELDED WIRE REINFORCEMENT (WWR) 4x4-W1.4xW1.4 IN THE CHEEK LUGS SHALL BE TIED TO THE END BENT REINFORCING STEEL.
3. CAP AND BACKWALL REINFORCEMENT IS NOT SHOWN IN SECTION F-F FOR CLARITY.
4. PEDESTALS AT THE OTHER BEAM LINES ARE SIMILAR.
5. PEDESTALS ARE CAST ON THE CAP; THE CAP TOP IS A CONSTRUCTION JOINT.
6. FOR REINFORCING BAR LIST, SEE SHEET B4-21.

BRIDGE NO. 729022

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

MATTHEW IAN KOSAR
LICENSE NUMBER: 77008
PARSONS TRANSPORTATION GROUP, INC.
1203 GOVERNORS SQUARE BLVD,SUITE 201
TALLAHASSEE, FL 32301

DRAWN BY: MH 07-26
CHECKED BY: JT 07-26
DESIGNED BY: JT 07-26
CHECKED BY: MIK 07-26

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID
SR 9	DUVAL	432259-5-52-01


SHEET TITLE: END BENT 1 DETAILS (3 OF 3)

REF. DWG. NO.:


PROJECT NAME: I-95 CAPACITY IMPROVEMENTS FROM SOUTH OF SR 152 TO SOUTH OF SR 126

SHEET NO.: B4-9

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

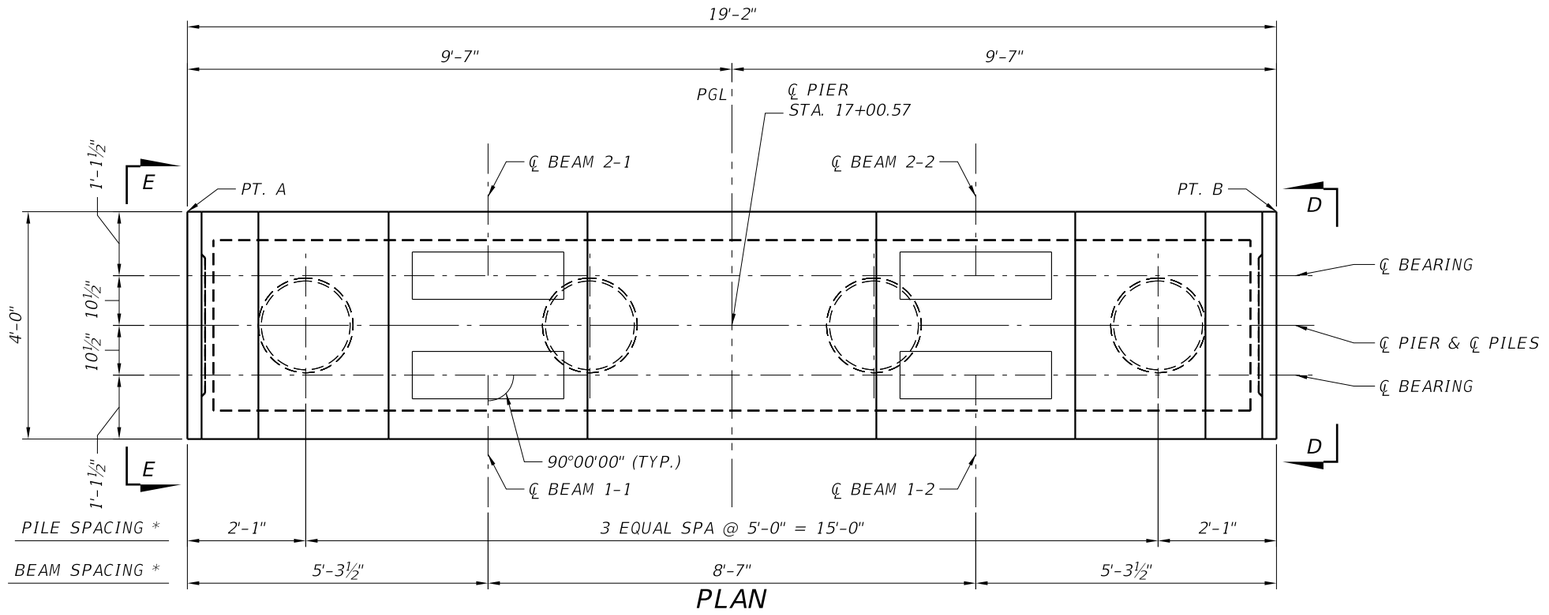

PLAN

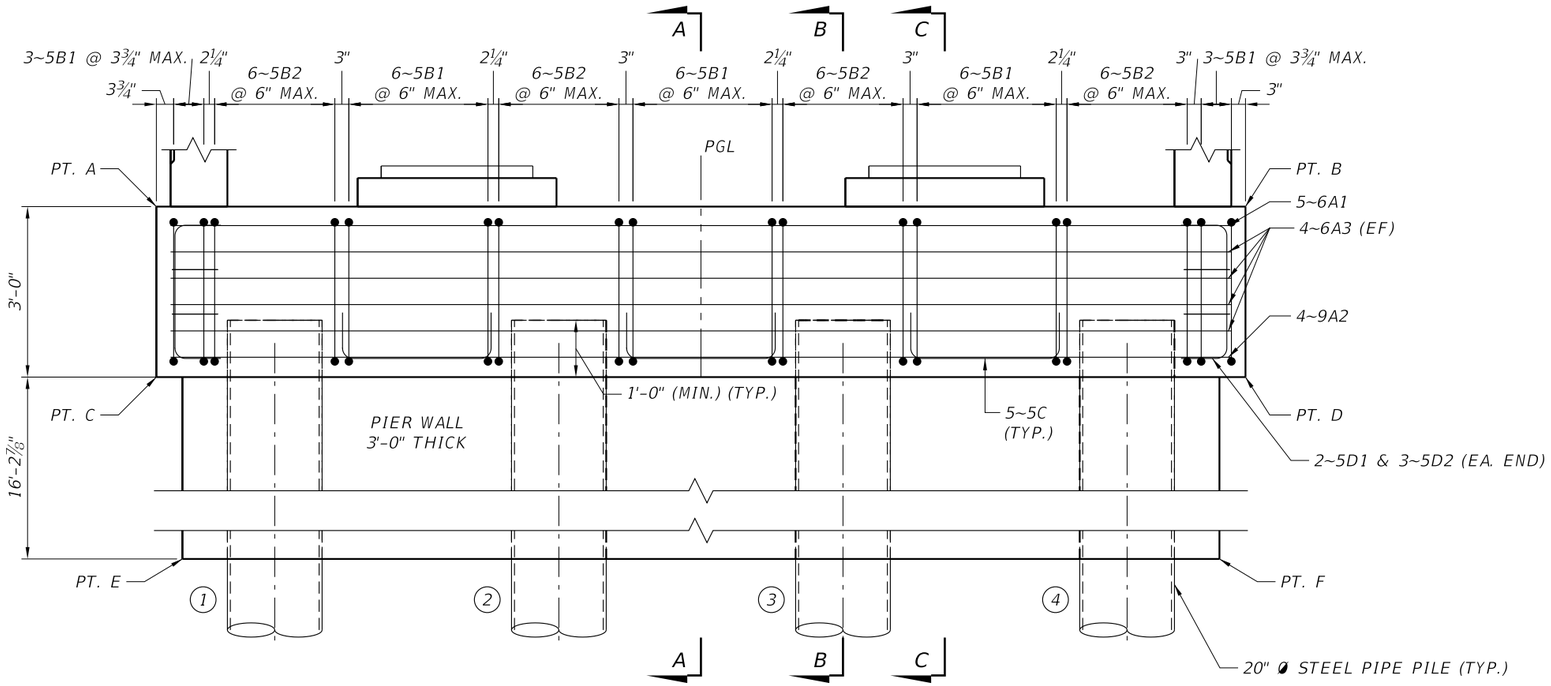

ELEVATION

(LOOKING AHEAD STATION)

* DIMENSIONS MEASURED ALONG ℄ PIER


DIRECTION OF STATIONING

TABLE OF ELEVATIONS	
POINT	ELEVATION
A	43.765
B	43.765
C	40.765
D	40.765
E	24.526
F	24.526

PILE CUTOFF ELEVATIONS		
PILE NO.	CUTOFF EL.	PGL OFFSET
1	41.8	-7'-6"
2	41.8	-2'-6"
3	41.8	2'-6"
4	41.8	7'-6"

NOTES:

1. STIRRUP SPACING IS DIMENSIONED TO BAR CENTERLINES.
2. REINFORCEMENT IS SHOWN REPRESENTATIVELY: THE FIRST AND LAST BAR OF EACH RUN ARE DRAWN.
3. FOR SECTIONS A-A, B-B AND C-C, SEE SHEET B4-11. FOR PEDESTAL DETAILS, SEE SHEET B4-12. FOR LOCATION OF VIEWS D-D AND E-E, SEE PLAN.
4. THE CHEEK WALLS ARE SHOWN BROKEN IN THE ELEVATION AND WHOLE IN VIEW D-D. FOR VIEW E-E AND THE CHEEK WALL SECTIONS F-F AND G-G, SEE SHEET B4-13.
5. FOR THE PIER WALL REINFORCEMENT AND THE ANNULAR PILE RING PLATES, SEE SHEETS B4-14 TO B4-16.
6. FOR REINFORCING BAR LIST, SEE SHEET B4-21.
7. PILE OFFSETS ARE FROM THE PGL, + TO THE RIGHT LOOKING UP-STATION. CUTOFF ELEVATIONS ARE TO THE NEAREST 0.1 FT.

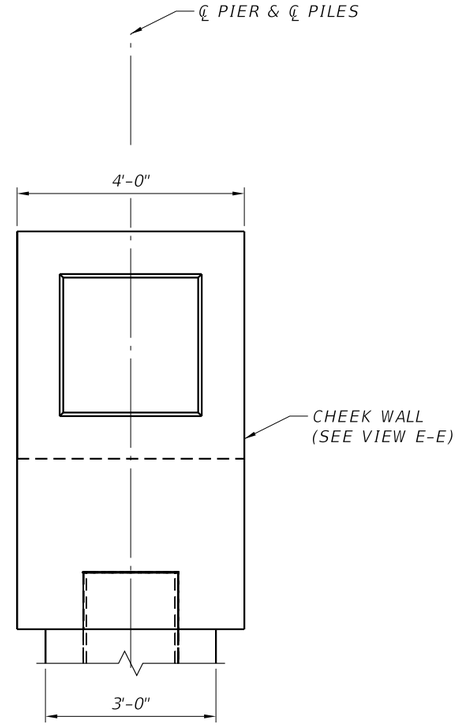

VIEW D-D

(END VIEW)

BRIDGE NO. 729022

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

MATTHEW IAN KOSAR
LICENSE NUMBER: 77008
PARSONS TRANSPORTATION GROUP, INC.
1203 GOVERNORS SQUARE BLVD,SUITE 201
TALLAHASSEE, FL 32301

DRAWN BY: MH 07-26
CHECKED BY: JT 07-26
DESIGNED BY: JT 07-26
CHECKED BY: MIK 07-26

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID
SR 9	DUVAL	432259-5-52-01


SHEET TITLE: PIER

REF. DWG. NO.:

PROJECT NAME: I-95 CAPACITY IMPROVEMENTS FROM SOUTH OF SR 152 TO SOUTH OF SR 126


SHEET NO.: B4-10

B4_Substructure_EndBents_Pier.dxf : B4-10 PIER
$USER$ $DATE$ $TIME$

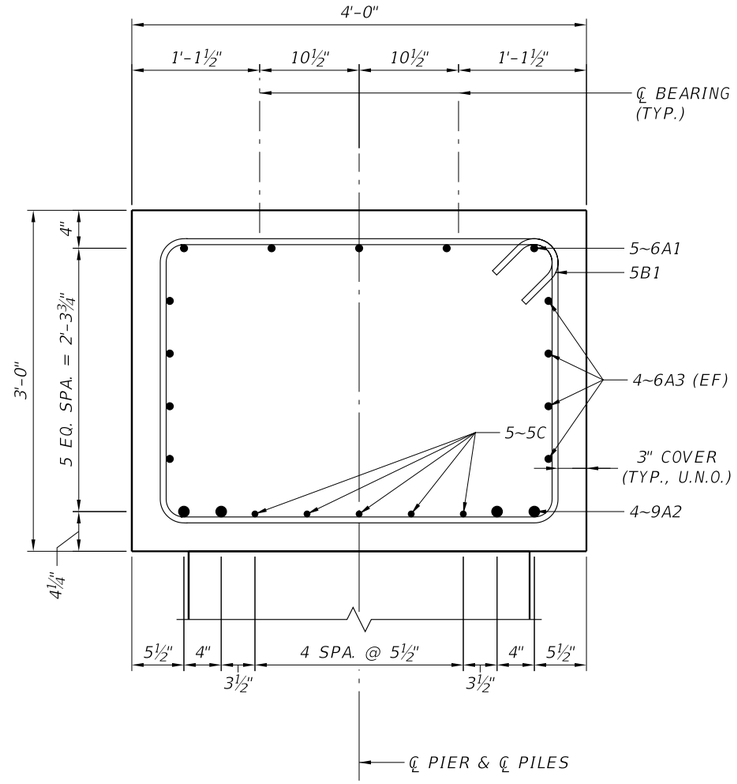


SECTION A-A

(SECTION BETWEEN PILES)

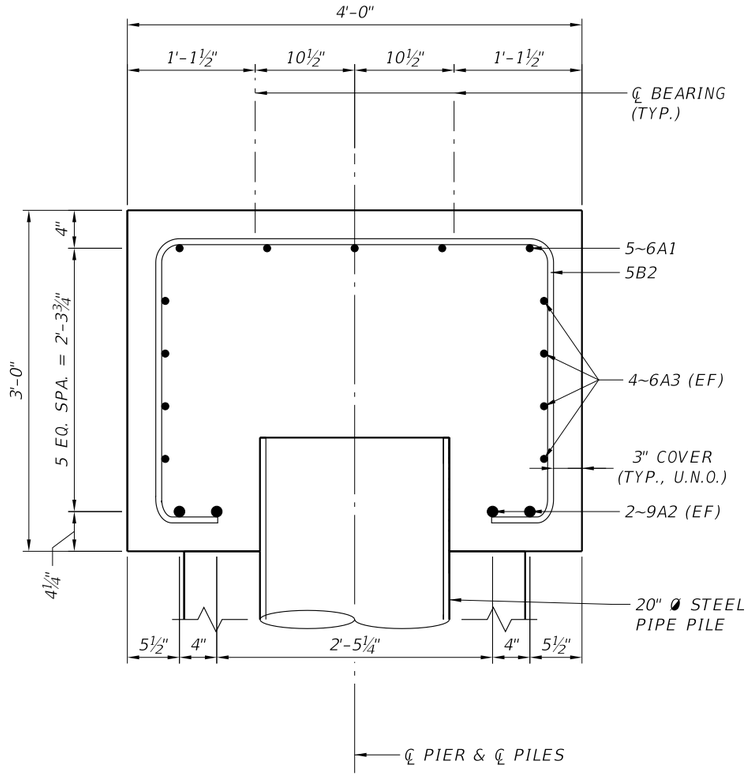

SECTION B-B

(SECTION AT PILES)

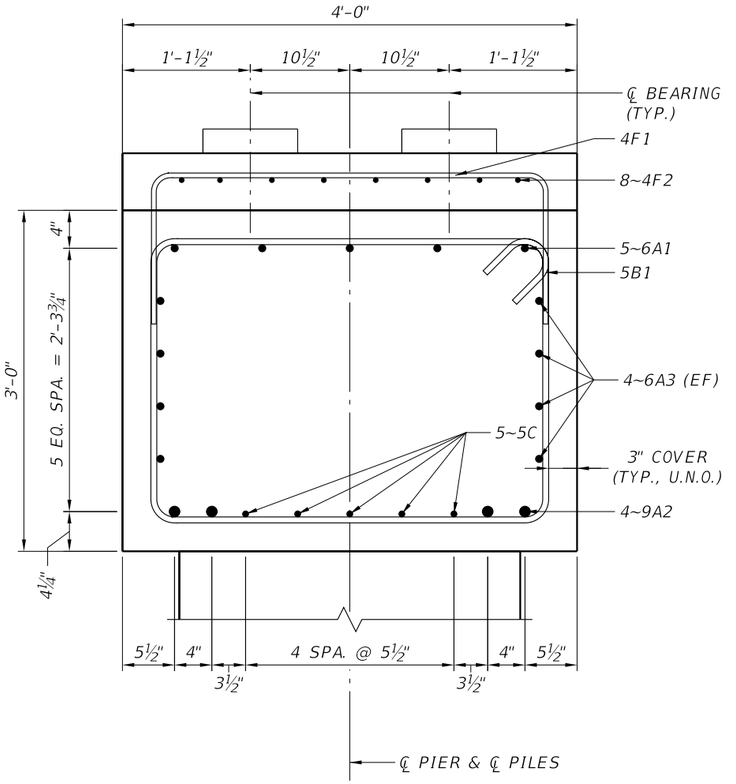

SECTION C-C

(SECTION AT CENTERLINE OF BEAMS)

NOTES:

1. FOR LOCATION OF SECTIONS, SEE SHEET B4-10.
2. ALL BARS ARE SHOWN IN SECTIONS; BARS IN THE SECTION PLANE ARE THE NEAREST BAR OF THEIR SERIES WITHIN 1'-3" BEYOND THE CUT.
3. FOR PEDESTAL DETAILS, SEE SHEET B4-12.
4. THE PIER WALL REINFORCEMENT IS NOT SHOWN IN THE WALL STUBS; SEE SHEETS B4-14, B4-15 AND B4-16.
5. FOR REINFORCING BAR LIST, SEE SHEET B4-21.

BRIDGE NO. 729022

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

MATTHEW IAN KOSAR
LICENSE NUMBER: 77008
PARSONS TRANSPORTATION GROUP, INC.
1203 GOVERNORS SQUARE BLVD,SUITE 201
TALLAHASSEE, FL 32301

DRAWN BY: MH 07-26
CHECKED BY: JT 07-26
DESIGNED BY: JT 07-26
CHECKED BY: MJK 07-26

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID
SR 9	DUVAL	432259-5-52-01


SHEET TITLE: PIER DETAILS (1 OF 6)

REF. DWG. NO.:

PROJECT NAME: I-95 CAPACITY IMPROVEMENTS FROM SOUTH OF SR 152 TO SOUTH OF SR 126

SHEET NO.: B4-11


THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

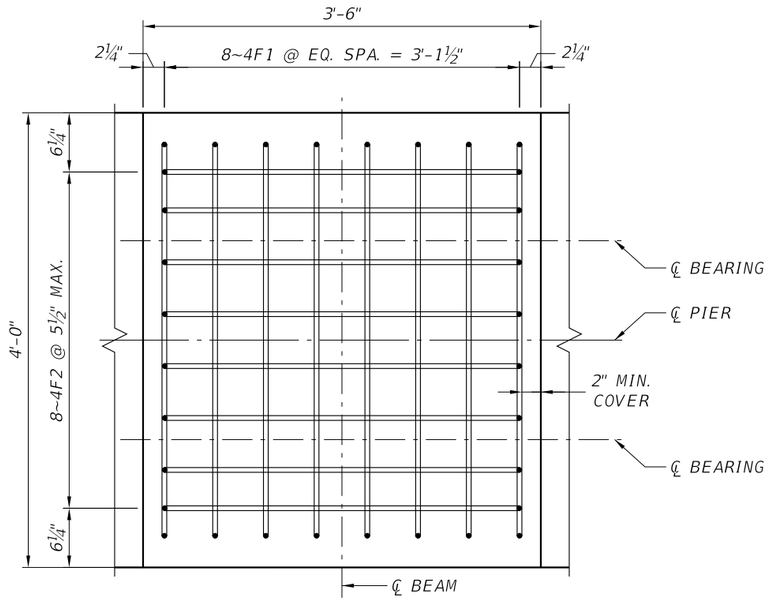

PEDESTAL PLAN

(BEAM LINE 1 SHOWN; BAR SPACING MAY BE ADJUSTED TO CLEAR THE CAP REINFORCEMENT)

DIRECTION OF STATIONING

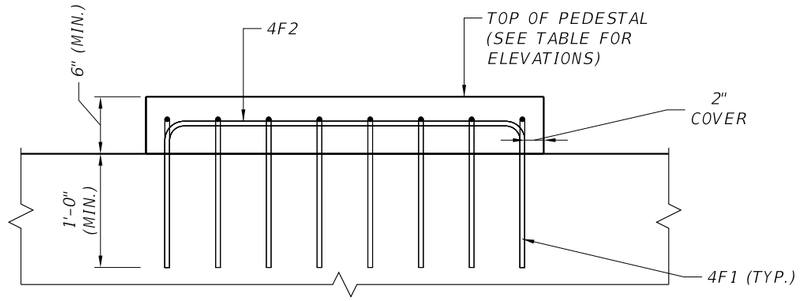

PEDESTAL ELEVATION

TOP OF PEDESTAL ELEVATIONS	
BEAM NO.	ELEVATION (FEET)
1-1 / 2-1	44.267
1-2 / 2-2	44.267

NOTES:

1. FOR LOCATION OF THE PEDESTALS, SEE SHEET B4-10; FOR SECTIONS A-A, B-B AND C-C, SEE SHEET B4-11.
2. PEDESTALS AT THE OTHER BEAM LINES ARE SIMILAR.
3. PEDESTALS ARE CAST ON THE CAP; THE CAP TOP IS A CONSTRUCTION JOINT.
4. FOR REINFORCING BAR LIST, SEE SHEET B4-21.

BRIDGE NO. 729022

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

REVISIONS

DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

MATTHEW IAN KOSAR
LICENSE NUMBER: 77008
PARSONS TRANSPORTATION GROUP, INC.
1203 GOVERNORS SQUARE BLVD,SUITE 201
TALLAHASSEE, FL 32301

DRAWN BY: MH 07-26
CHECKED BY: JT 07-26
DESIGNED BY: JT 07-26
CHECKED BY: MIK 07-26

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION


ROAD NO.	COUNTY	FINANCIAL PROJECT ID
SR 9	DUVAL	432259-5-52-01

SHEET TITLE: PIER DETAILS (2 OF 6)


REF. DWG. NO.:

PROJECT NAME: I-95 CAPACITY IMPROVEMENTS FROM SOUTH OF SR 152 TO SOUTH OF SR 126


SHEET NO.: B4-12

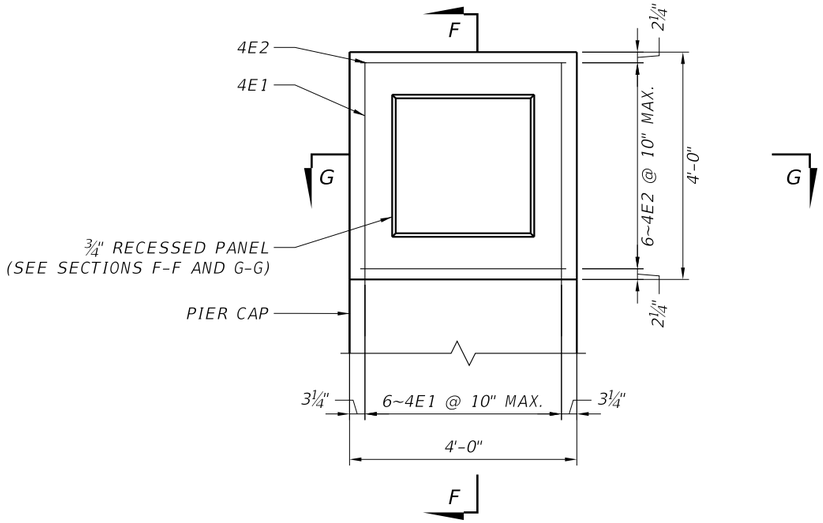

VIEW E-E
(LEFT CHEEK WALL)

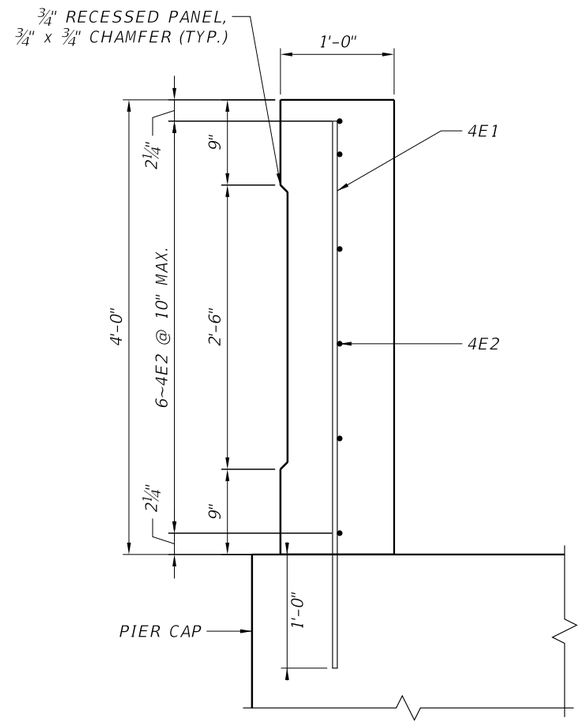

SECTION F-F
(THROUGH CHEEK WALL)

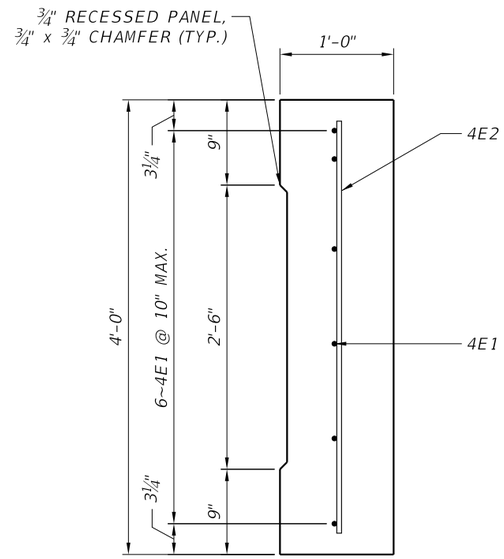

SECTION G-G
(THROUGH CHEEK WALL)

NOTES:

1. FOR LOCATION OF VIEW E–E, SEE SHEET B4–10 (PLAN). SECTIONS F–F AND G–G ARE LOCATED IN VIEW E–E.
2. VIEW E–E AND SECTIONS F–F AND G–G SHOW THE LEFT CHEEK WALL; THE RIGHT CHEEK WALL IS SIMILAR (MIRRORED). THE RECESSED PANEL IS ON THE OUTSIDE FACE OF EACH CHEEK WALL; THE INSIDE FACE IS FLAT.
3. CAP REINFORCEMENT IS NOT SHOWN IN SECTION F–F FOR CLARITY.
4. CHEEK WALLS ARE CAST ON THE CAP; THE CAP TOP IS A CONSTRUCTION JOINT.
5. CHEEK WALL VERTICALS 4E1 ARE EMBEDDED 1'–0" (MIN.) INTO THE CAP, STRAIGHT; SEE SECTION F–F.
6. FOR REINFORCING BAR LIST, SEE SHEET B4–21.

BRIDGE NO. 729022

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

MATTHEW IAN KOSAR
LICENSE NUMBER: 77008
PARSONS TRANSPORTATION GROUP, INC.
1203 GOVERNORS SQUARE BLVD,SUITE 201
TALLAHASSEE, FL 32301

DRAWN BY: MH 07-26
CHECKED BY: JT 07-26
DESIGNED BY: JT 07-26
CHECKED BY: MIK 07-26

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID
SR 9	DUVAL	432259-5-52-01


SHEET TITLE: PIER DETAILS (3 OF 6)

REF. DWG. NO.:

PROJECT NAME: I-95 CAPACITY IMPROVEMENTS FROM SOUTH OF SR 152 TO SOUTH OF SR 126

SHEET NO.: B4-13

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

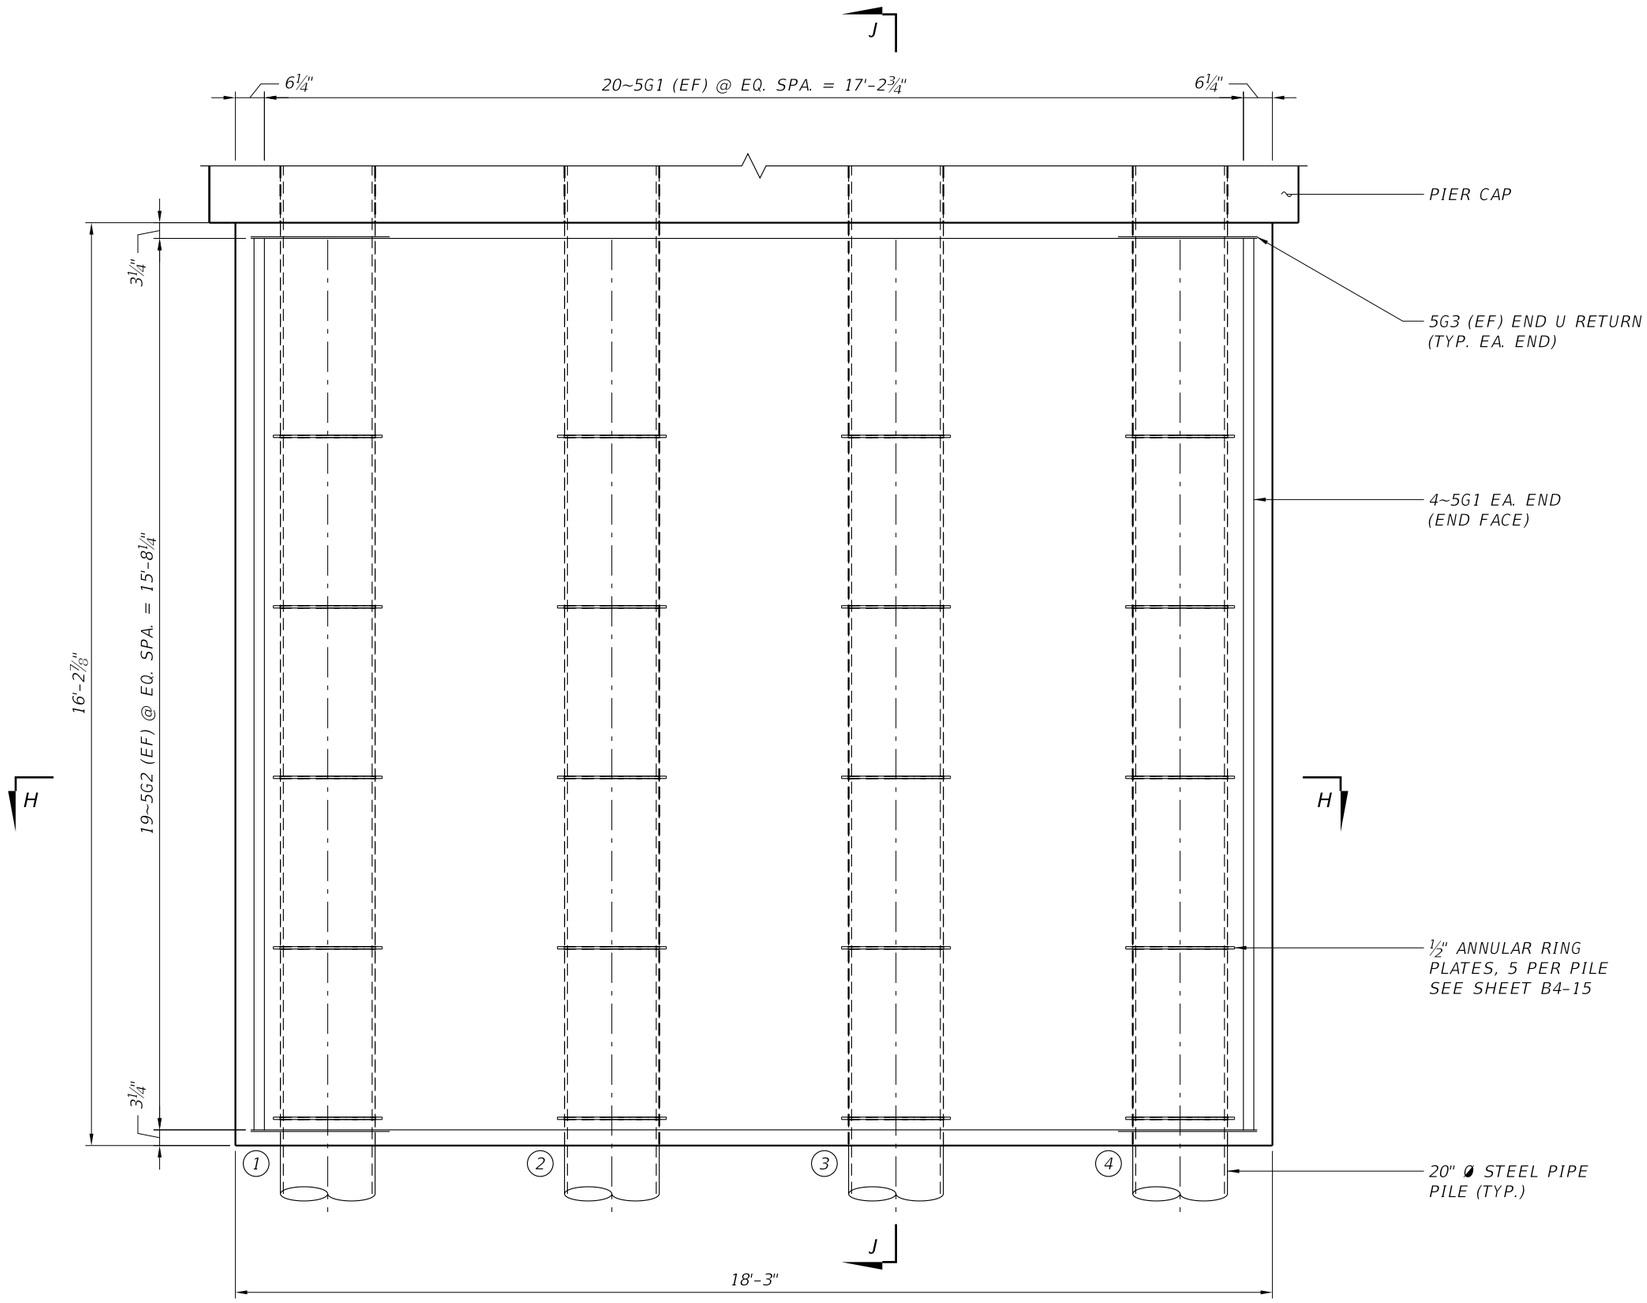

PIER WALL ELEVATION

(LOOKING AHEAD STATION)

NOTES:

1. FOR THE LOCATION OF THE PIER WALL, SEE SHEET B4-10 (PLAN AND ELEVATION). SECTIONS H-H AND J-J ARE LOCATED IN THE PIER WALL ELEVATION; FOR SECTION J-J AND THE ANNULAR RING PLATE DETAILS, SEE SHEET B4-15; FOR SECTION H-H, SEE SHEET B4-16.
2. PIER WALL REINFORCEMENT: #5 BARS AT 11" MAXIMUM EACH WAY ON EACH FACE (5G1 VERTICALS, 5G2 HORIZONTALS), 3" CLEAR COVER; 5G3 END U RETURNS AT EACH HORIZONTAL WITH 2'-3" CONTACT LAP LEGS ALONG THE FACES; 4~5G1 VERTICALS IN EACH END FACE. THE HORIZONTALS ARE THE OUTER LAYER.
3. REINFORCEMENT IS SHOWN REPRESENTATIVELY: THE FIRST AND LAST BAR OF EACH RUN ARE DRAWN.
4. ANNULAR RING PLATES: 20 PLATES, ½" THICK, 23" O.D. x 20⅛" I.D., 5 PER PILE WITH THE PLATE TOPS 6", 3'-6", 6'-6", 9'-6", 12'-6" ABOVE THE BOTTOM OF THE WALL, CENTERED ON THE PILES AND WELDED TO THEM WITH TWO CONTINUOUS 5⁄16" FILLETS (TOP AND BOTTOM OF EACH PLATE); SEE SHEET B4-15. THE PLATES ARE SHOWN HIDDEN IN THE ELEVATION.
5. PILES ARE SHOWN AT THEIR NOMINAL LOCATIONS; THE RING PLATES ARE SIZED FOR A 3" RADIAL PILE PLACEMENT TOLERANCE.
6. THE CAP IS SHOWN BROKEN 1'-0" ABOVE ITS BOTTOM; FOR THE CAP, SEE SHEETS B4-10 AND B4-11.
7. MODEL CHECK (REMOVE BEFORE ISSUE): THE SELECTED RING CALCULATION (PIER-WALL-CASE, D-084, 22 OCTOBER 2026) REPORTS THE FAILED CHECK RING-GRID (RING CLEARANCE TO INNER FACE-GRID LAYER: 1.125 IN REQUIRED, -0.75 IN AVAILABLE); RESOLVE BEFORE ISSUE.
8. MODEL CHECK (REMOVE BEFORE ISSUE): THE PIER WALL VERTICALS STOP 3⅜" BELOW THE CAP AND 3⅜" ABOVE THE BOTTOM OF THE WALL IN THE CAD MODEL (NO ANCHORAGE INTO THE CAP); DETAIL THE WALL-TO-CAP CONNECTION AND ADD IT TO THE MODEL.
9. MODEL CHECK (REMOVE BEFORE ISSUE): CAD MODEL STATUS OF THE PIER WALL STEEL: "CAD END U RETURN LEGS 27 IN AND RING PLATES 1/2 IN MATCH THE SELECTED D-084 CASE (LRFD 10TH 5.10.8.2.1 DEVELOPMENT, 26-IN CLASS B LAP); WALL DIMENSIONS MATCH D-075 WITHIN 0.001 IN; RING-GRID TOLERANCE FAILURE REMAINS; ENGINEERING ACCEPTANCE OPEN".
10. FOR REINFORCING BAR LIST, SEE SHEET B4-21.

BRIDGE NO. 729022

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

MATTHEW IAN KOSAR
LICENSE NUMBER: 77008
PARSONS TRANSPORTATION GROUP, INC.
1203 GOVERNORS SQUARE BLVD,SUITE 201
TALLAHASSEE, FL 32301

DRAWN BY:	MH 07-26
CHECKED BY:	JT 07-26
DESIGNED BY:	JT 07-26
CHECKED BY:	MJK 07-26

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID
SR 9	DUVAL	432259-5-52-01


SHEET TITLE: PIER DETAILS (4 OF 6)

REF. DWG. NO.:

PROJECT NAME: I-95 CAPACITY IMPROVEMENTS FROM SOUTH OF SR 152 TO SOUTH OF SR 126


SHEET NO.: B4-14

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

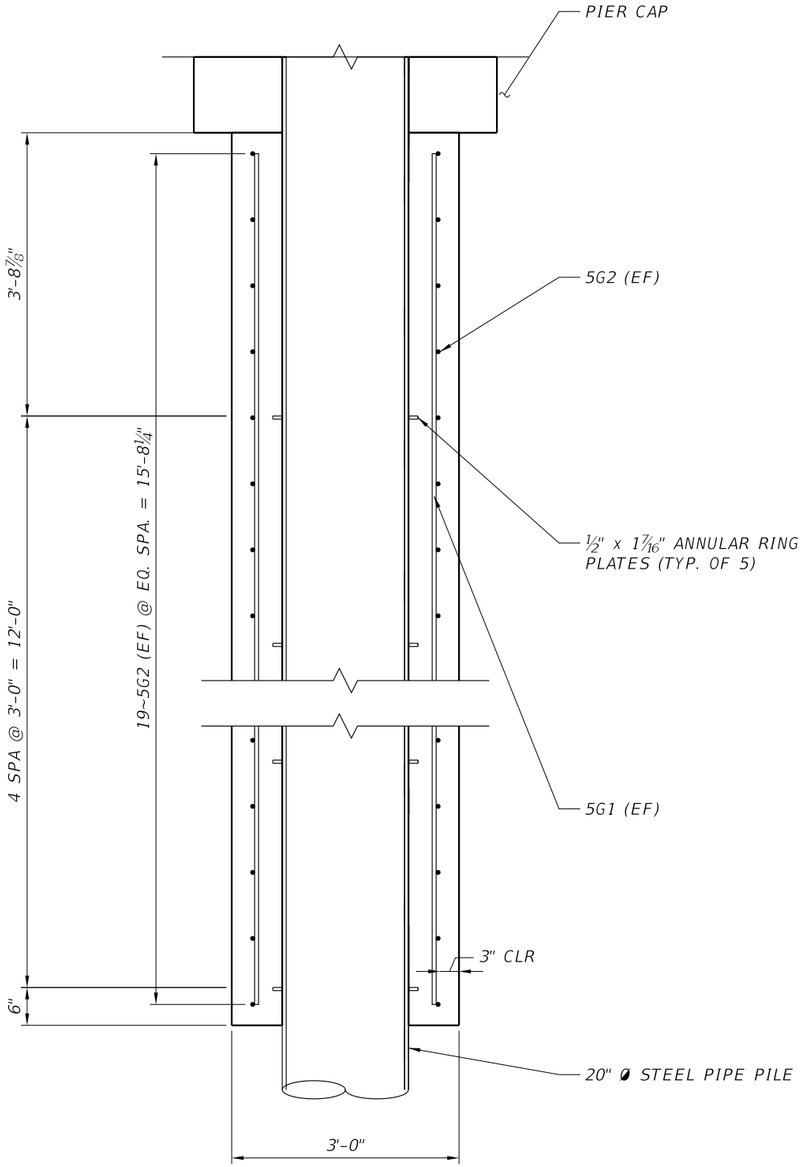


SECTION J-J

(THROUGH PIER WALL AT PILE 3)

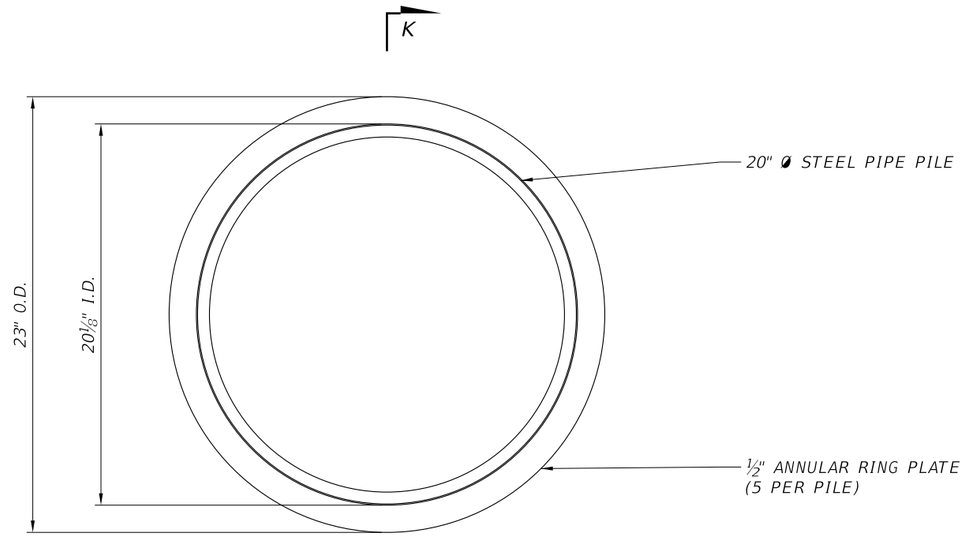

ANNULAR RING PLATE

(PLAN)

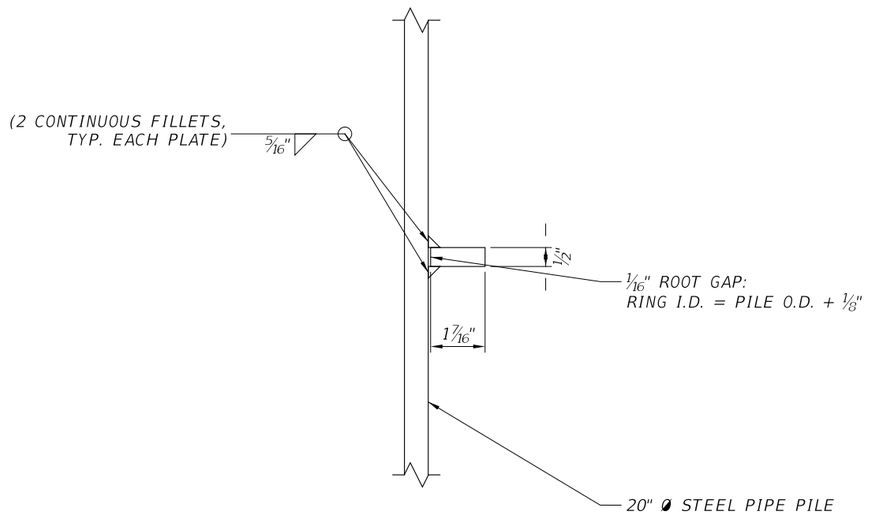

SECTION K-K

(THROUGH ANNULAR RING PLATE)

NOTES:

1. FOR THE LOCATION OF SECTION J-J, SEE THE PIER WALL ELEVATION, SHEET B4-14. SECTION K-K IS LOCATED IN THE ANNULAR RING PLATE PLAN.
2. SECTION J-J IS BROKEN BETWEEN RING ROWS 2 AND 4; THE RING PLATE TOPS ARE DIMENSIONED FROM THE BOTTOM OF THE WALL AND THE HORIZONTAL BAR SERIES IS GIVEN IN FULL.
3. ALL BARS ARE SHOWN IN SECTION J-J; BARS IN THE SECTION PLANE ARE THE NEAREST BAR OF THEIR SERIES WITHIN 1'-3" BEYOND THE CUT. THE END U RETURNS AND THE END-FACE VERTICALS LIE BEYOND THE CUT AND ARE NOT SHOWN; SEE SECTION H-H, SHEET B4-16.
4. ANNULAR RING PLATES: ½" THICK, 23" O.D. x 20⅛" I.D. (1 7/16" RADIAL WIDTH), Fy = 50 KSI, Fu = 65 KSI; WELDED TO THE PIPE PILE WITH TWO CONTINUOUS 5/16" FILLET WELDS, E70XX ELECTRODES, ONE AT THE TOP AND ONE AT THE BOTTOM OF EACH PLATE. THE 1/16" RADIAL ROOT GAP IS AN ANALYSIS ALLOWANCE; THE WPS SHALL ACCEPT IT.
5. PIPE PILES ARE SHOWN WITH THEIR NOMINAL 20" OUTSIDE DIAMETER; THE WELD SOLIDS ARE NOT IN THE CAD MODEL.
6. THE PLATE AND WELD SIZES ARE THOSE OF THE SELECTED PIER WALL RING CALCULATION (PIER-WALL-CASE, D-084, 22 OCTOBER 2026).
7. FOR REINFORCING BAR LIST, SEE SHEET B4-21.

BRIDGE NO. 729022

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

REVISIONS

DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

MATTHEW IAN KOSAR
LICENSE NUMBER: 77008
PARSONS TRANSPORTATION GROUP, INC.
1203 GOVERNORS SQUARE BLVD,SUITE 201
TALLAHASSEE, FL 32301

DRAWN BY: MH 07-26
CHECKED BY: JT 07-26
DESIGNED BY: JT 07-26
CHECKED BY: MIK 07-26

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION


ROAD NO.	COUNTY	FINANCIAL PROJECT ID
SR 9	DUVAL	432259-5-52-01

SHEET TITLE: PIER DETAILS (5 OF 6)

REF. DWG. NO.:

PROJECT NAME: I-95 CAPACITY IMPROVEMENTS FROM SOUTH OF SR 152 TO SOUTH OF SR 126

SHEET NO.: B4-15

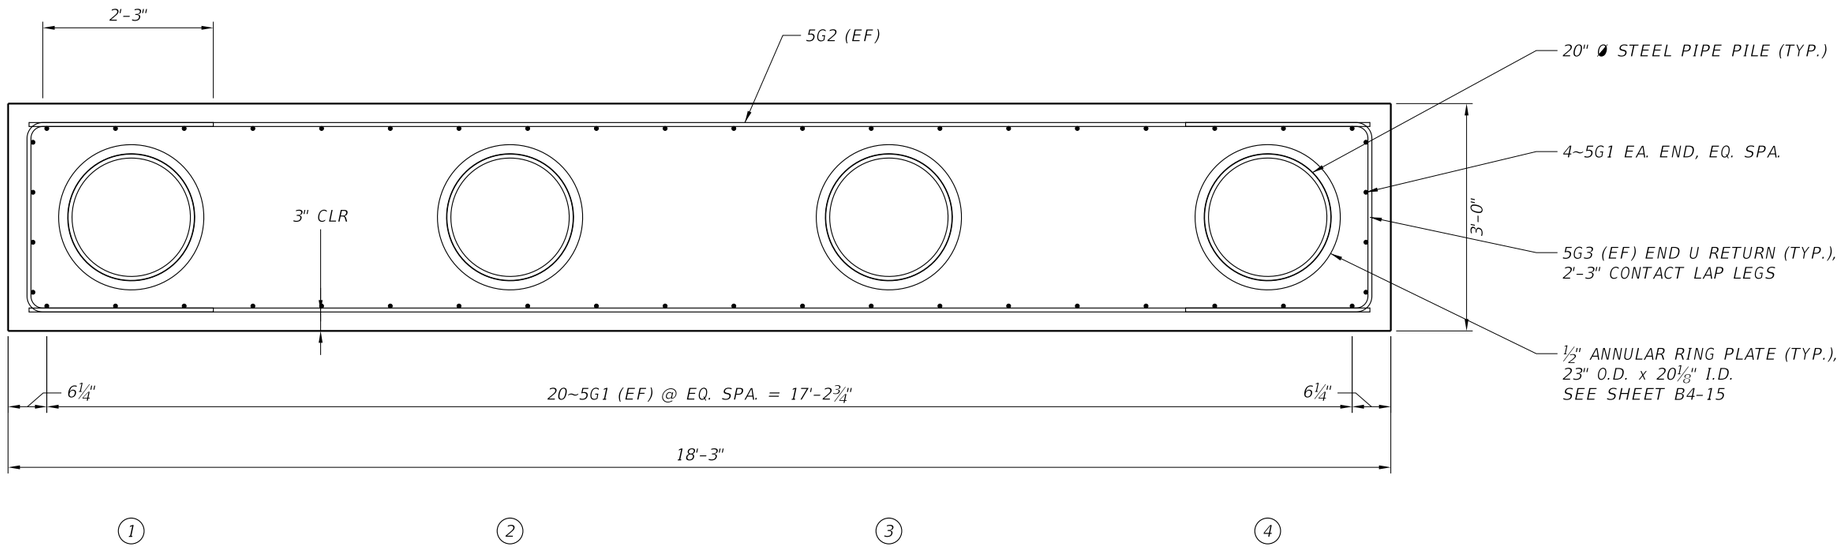

SECTION H-H

(HORIZONTAL SECTION THROUGH PIER WALL AT RING ROW 3)

NOTES:

1. FOR THE LOCATION OF SECTION H-H, SEE THE PIER WALL ELEVATION, SHEET B4-14.
2. ALL BARS ARE SHOWN IN SECTION H-H; BARS IN THE SECTION PLANE ARE THE NEAREST BAR OF THEIR SERIES WITHIN 1'-3" BELOW THE CUT. THE CUT IS THROUGH RING ROW 3; THE RING PLATES AND THE PIPE PILES ARE SHOWN CUT.
3. THE END U RETURNS LAP THE HORIZONTALS ALONG BOTH FACES; THE U LEG LENGTH IS DIMENSIONED OVER THE BACK FACE AT THE LEFT END AND IS THE SAME AT EVERY END U RETURN.
4. COVER IS DIMENSIONED TO THE OUTERMOST BAR (THE HORIZONTALS) AT THE FRONT FACE; IT IS 3" ON EVERY FACE.
5. PILE NUMBERS ARE THOSE OF SHEET B4-10.
6. FOR REINFORCING BAR LIST, SEE SHEET B4-21.

BRIDGE NO. 729022

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

MATTHEW IAN KOSAR
LICENSE NUMBER: 77008
PARSONS TRANSPORTATION GROUP, INC.
1203 GOVERNORS SQUARE BLVD,SUITE 201
TALLAHASSEE, FL 32301

DRAWN BY:	MH 07-26
CHECKED BY:	JT 07-26
DESIGNED BY:	JT 07-26
CHECKED BY:	MJK 07-26

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID
SR 9	DUVAL	432259-5-52-01


SHEET TITLE: PIER DETAILS (6 OF 6)

REF. DWG. NO.:


PROJECT NAME: I-95 CAPACITY IMPROVEMENTS FROM SOUTH OF SR 152 TO SOUTH OF SR 126

SHEET NO.: B4-16

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

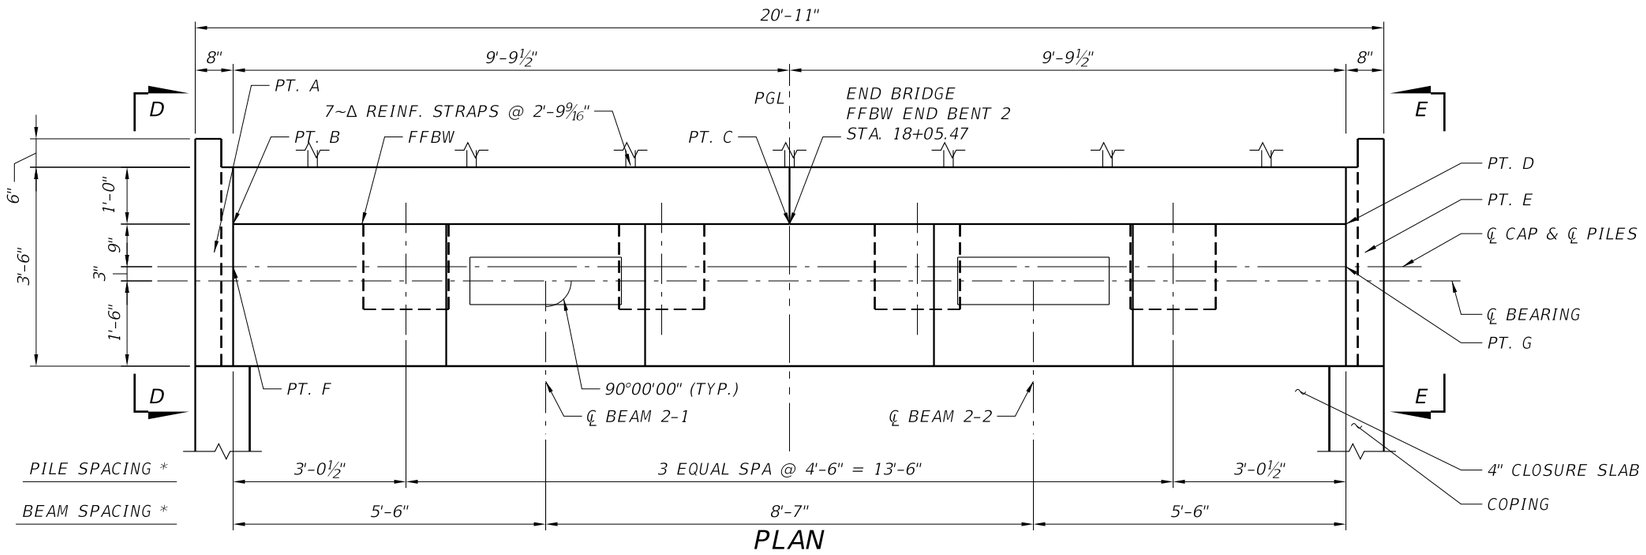

PLAN

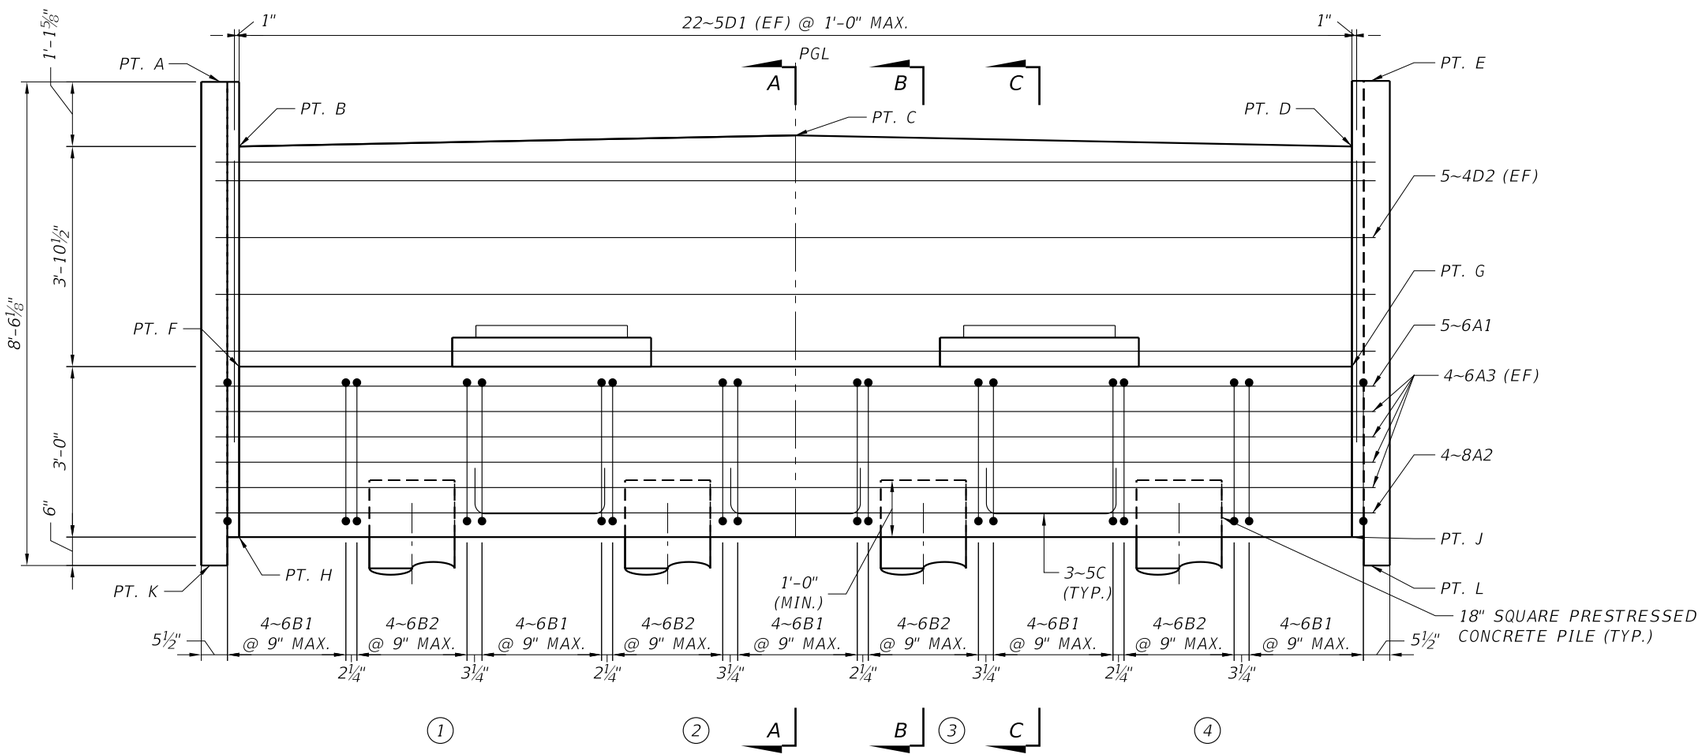

* DIMENSIONS MEASURED ALONG FFBW

ELEVATION

(LOOKING AHEAD STATION)

DIRECTION OF STATIONING

TABLE OF ELEVATIONS	
POINT	ELEVATION
A	48.260
B	47.123
C	47.319
D	47.123
E	48.277
F	43.250
G	43.250
H	40.250
J	40.250
K	39.750
L	39.750

PILE CUTOFF ELEVATIONS		
PILE NO.	CUTOFF EL.	PGL OFFSET
1	41.2	-6'-9"
2	41.2	-2'-3"
3	41.2	2'-3"
4	41.2	6'-9"

NOTES:

1. STIRRUP SPACING IS DIMENSIONED TO BAR CENTERLINES.
2. REINFORCEMENT IS SHOWN REPRESENTATIVELY: THE FIRST AND LAST BAR OF EACH RUN ARE DRAWN.
3. FOR SECTIONS A-A AND B-B AND DETAILS "A" AND "B", SEE SHEET B4-18. FOR SECTION C-C AND VIEWS D-D AND E-E, SEE SHEET B4-19. FOR SECTIONS F-F AND G-G AND PEDESTAL DETAILS, SEE SHEET B4-20.
4. FOR THE SOIL REINFORCEMENT (Δ) LEGEND, SEE SHEET B4-18.
5. FOR REINFORCING BAR LIST, SEE SHEET B4-21.
6. PILE OFFSETS ARE FROM THE PGL, + TO THE RIGHT LOOKING UP-STATION. CUTOFF ELEVATIONS ARE TO THE NEAREST 0.1 FT.

BRIDGE NO. 729022

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

MATTHEW IAN KOSAR
LICENSE NUMBER: 77008
PARSONS TRANSPORTATION GROUP, INC.
1203 GOVERNORS SQUARE BLVD,SUITE 201
TALLAHASSEE, FL 32301

DRAWN BY:	MH 07-26
CHECKED BY:	JT 07-26
DESIGNED BY:	JT 07-26
CHECKED BY:	MIK 07-26

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION


ROAD NO.	COUNTY	FINANCIAL PROJECT ID
SR 9	DUVAL	432259-5-52-01

SHEET TITLE: END BENT 2

REF. DWG. NO.:


PROJECT NAME: I-95 CAPACITY IMPROVEMENTS FROM SOUTH OF SR 152 TO SOUTH OF SR 126

SHEET NO.: B4-17

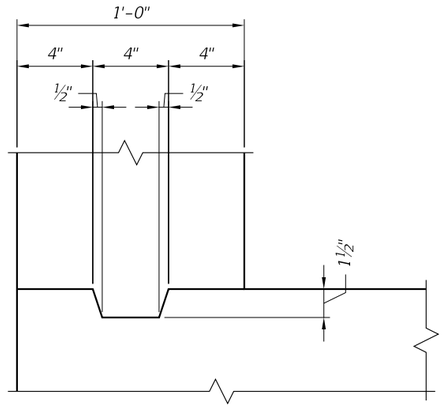

DETAIL "A"

(CONSTRUCTION JOINT)

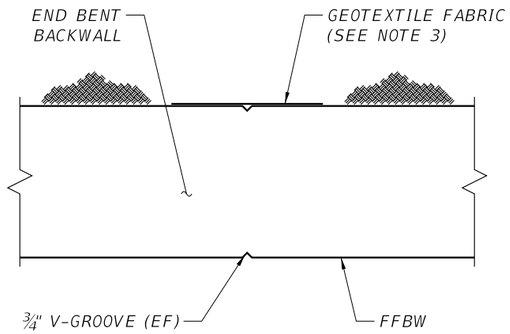


DETAIL "B"

(END BENT BACKWALL V-GROOVE)


LEGEND:

Δ REINFORCING STRAPS AND ATTACHMENTS FOR THE END BENT SHALL BE DESIGNED AND FURNISHED BY THE PROPRIETARY WALL PROVIDER. THE STRAPS SHALL BE DESIGNED TO RESIST A SERVICE LOAD OF 3.09 K/FT AND A FACTORED LOAD OF 3.74 K/FT (STRENGTH I) PERPENDICULAR TO THE END BENT BACKWALL.

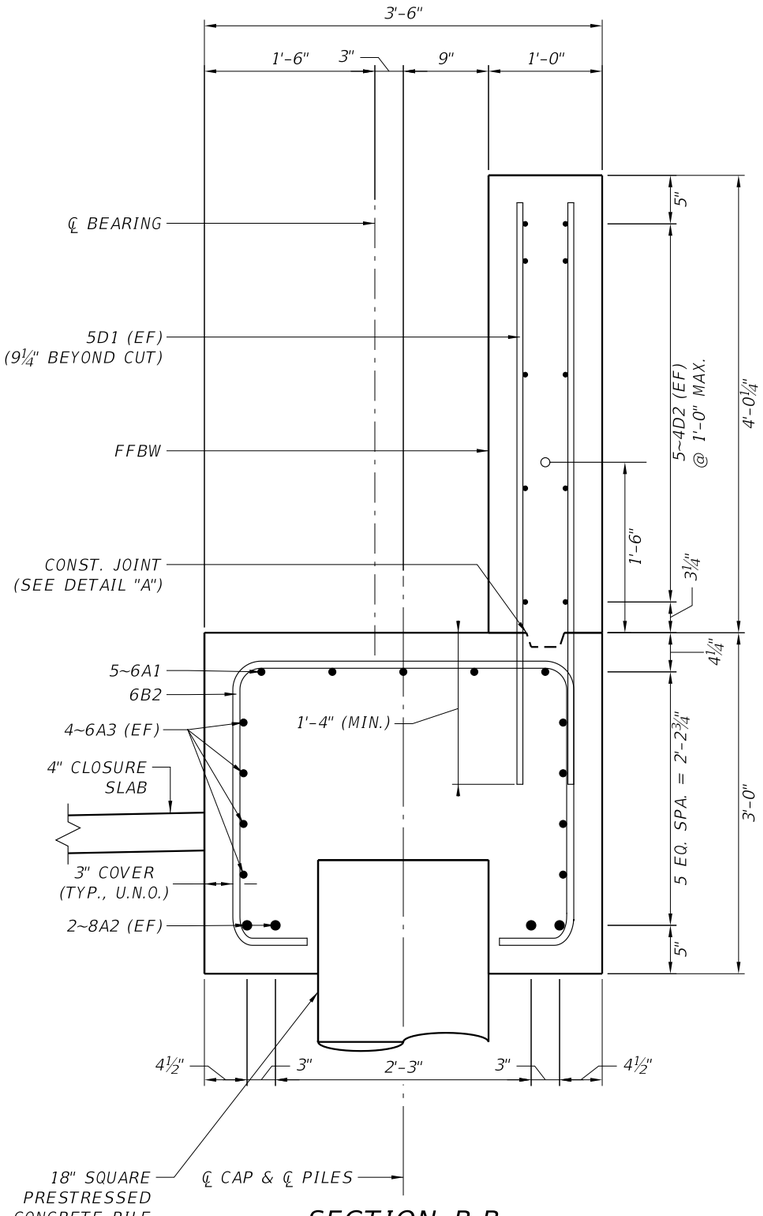

SECTION B-B

(SECTION AT PILES)

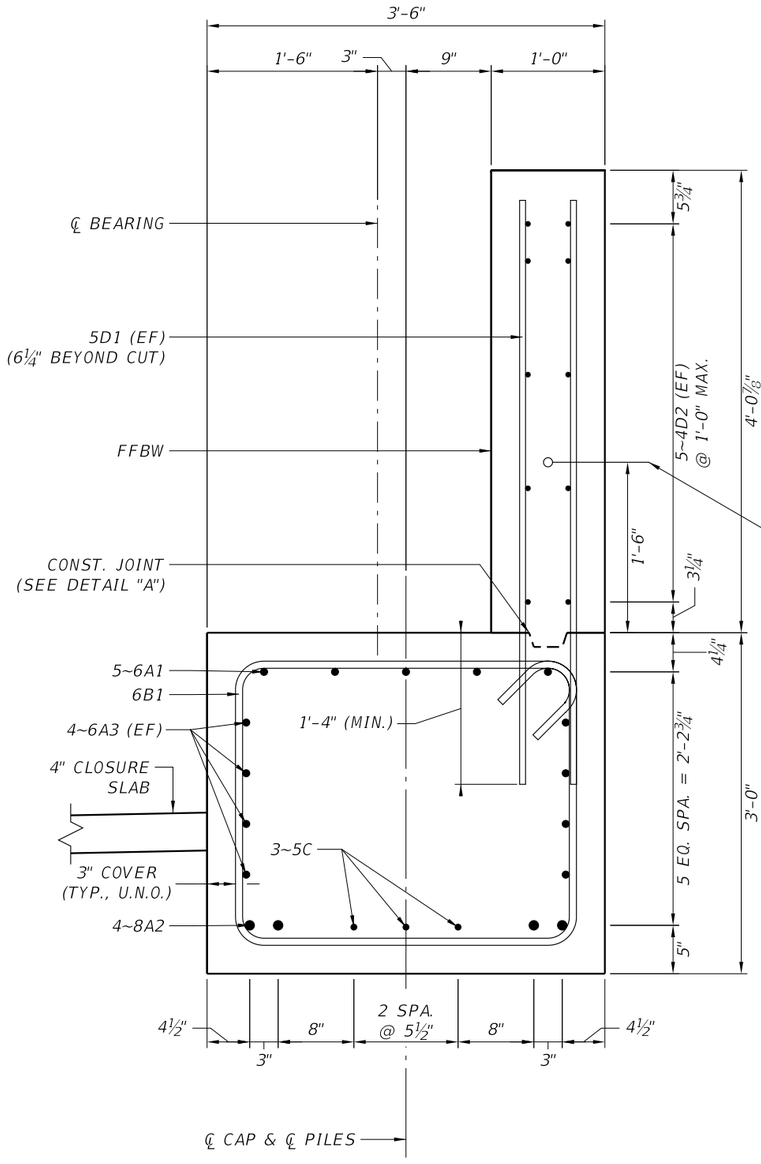

SECTION A-A

(SECTION BETWEEN PILES)

NOTES:

1. FOR LOCATION OF SECTIONS, SEE SHEET B4-17.
2. ALL BARS ARE SHOWN IN SECTIONS; BARS IN THE SECTION PLANE ARE THE NEAREST BAR OF THEIR SERIES WITHIN 1'-3" BEYOND THE CUT.
3. ATTACH TYPE D-5 (SPECIFICATIONS SECTION 985) GEOTEXTILE FABRIC, 1'-0" WIDE AND FULL HEIGHT OF FILL, TO THE BACK OF BACKWALL AT V-GROOVE LOCATIONS WITH AN ADHESIVE APPROVED BY THE ENGINEER.
4. MODEL CHECK (REMOVE BEFORE ISSUE): DETAILS "A" AND "B" ARE SCHEMATIC; THE CONSTRUCTION JOINT KEY AND THE V-GROOVE LOCATIONS ARE NOT IN THE CAD MODEL.
5. FOR REINFORCING BAR LIST, SEE SHEET B4-21.

BRIDGE NO. 729022

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

MATTHEW IAN KOSAR
LICENSE NUMBER: 77008
PARSONS TRANSPORTATION GROUP, INC.
1203 GOVERNORS SQUARE BLVD,SUITE 201
TALLAHASSEE, FL 32301

DRAWN BY: MH 07-26
CHECKED BY: JT 07-26
DESIGNED BY: JT 07-26
CHECKED BY: MIK 07-26

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID
SR 9	DUVAL	432259-5-52-01


SHEET TITLE: END BENT 2 DETAILS (1 OF 3)

REF. DWG. NO.:

PROJECT NAME: I-95 CAPACITY IMPROVEMENTS FROM SOUTH OF SR 152 TO SOUTH OF SR 126


SHEET NO.: B4-18

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

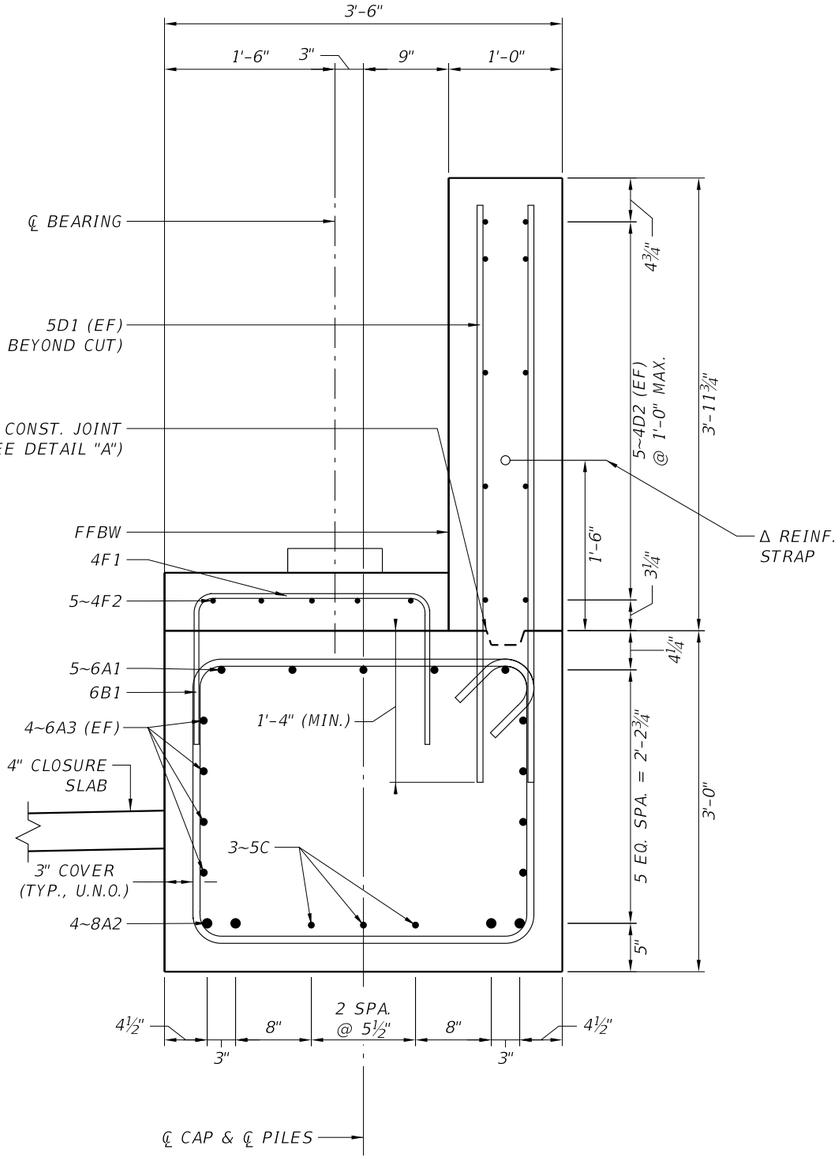


SECTION C-C

(SECTION AT CENTERLINE OF BEAM)

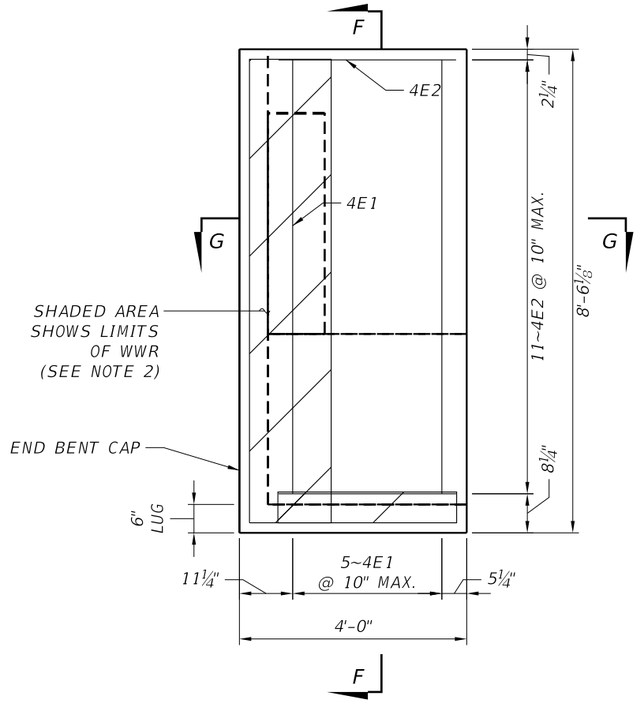

VIEW D-D

(LEFT CHEEK WALL)

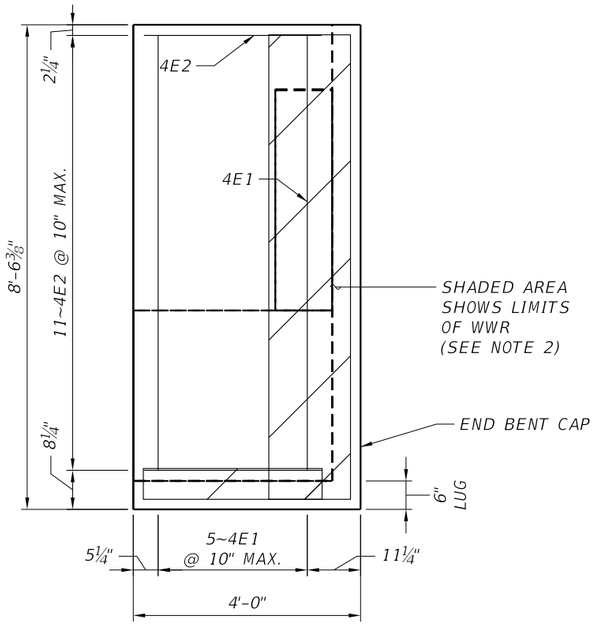

VIEW E-E

(RIGHT CHEEK WALL)

NOTES:

1. FOR LOCATION OF SECTION C-C AND VIEWS D-D AND E-E, SEE SHEET B4-17.
2. WELDED WIRE REINFORCEMENT (WWR) 4x4-W1.4xW1.4 IN THE CHEEK LUGS SHALL BE TIED TO THE END BENT REINFORCING STEEL.
3. FOR CHEEK TOP ELEVATIONS, SEE THE TABLE OF ELEVATIONS, SHEET B4-17.
4. SECTIONS F-F AND G-G ARE LOCATED IN VIEW D-D; FOR SECTIONS F-F AND G-G, SEE SHEET B4-20.
5. FOR THE Δ REINFORCING STRAP LEGEND, SEE SHEET B4-18.
6. MODEL CHECK (REMOVE BEFORE ISSUE): THE BACKWALL TOP IS LEVEL ACROSS THE WALL THICKNESS IN THE CAD MODEL (ITS SLOPE RUNS ALONG THE BENT TO THE CROWN ONLY); THE SECTIONS SHOW THE MODEL. ADD THE CROSS SLOPE TO THE MODEL.
7. FOR REINFORCING BAR LIST, SEE SHEET B4-21.

BRIDGE NO. 729022

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

MATTHEW IAN KOSAR
LICENSE NUMBER: 77008
PARSONS TRANSPORTATION GROUP, INC.
1203 GOVERNORS SQUARE BLVD,SUITE 201
TALLAHASSEE, FL 32301

DRAWN BY:	MH 07-26
CHECKED BY:	JT 07-26
DESIGNED BY:	JT 07-26
CHECKED BY:	MIK 07-26

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID
SR 9	DUVAL	432259-5-52-01


SHEET TITLE: END BENT 2 DETAILS (2 OF 3)

REF. DWG. NO.:

PROJECT NAME: I-95 CAPACITY IMPROVEMENTS FROM SOUTH OF SR 152 TO SOUTH OF SR 126


SHEET NO.: B4-19

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

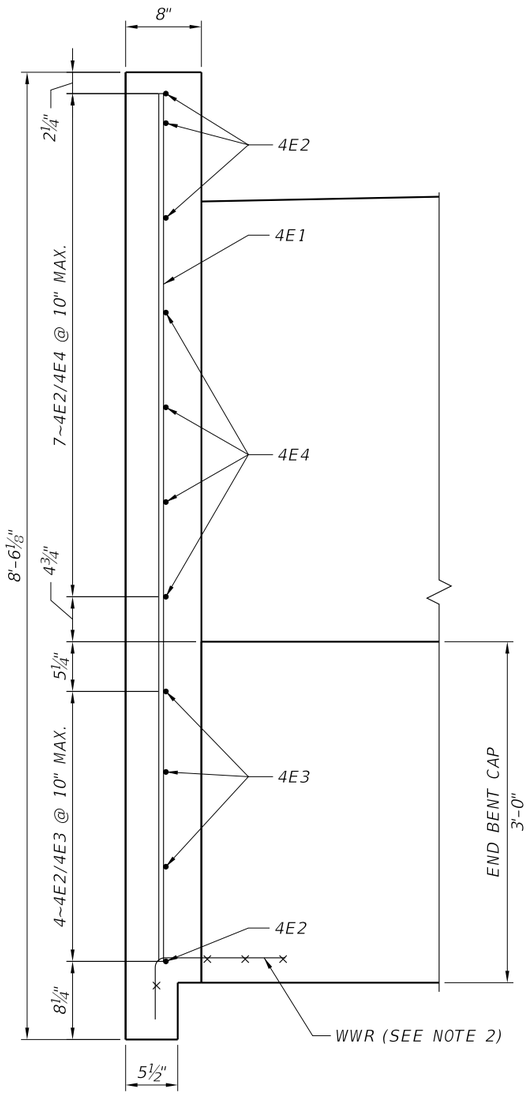


SECTION F-F

(THROUGH CHEEK WALL)

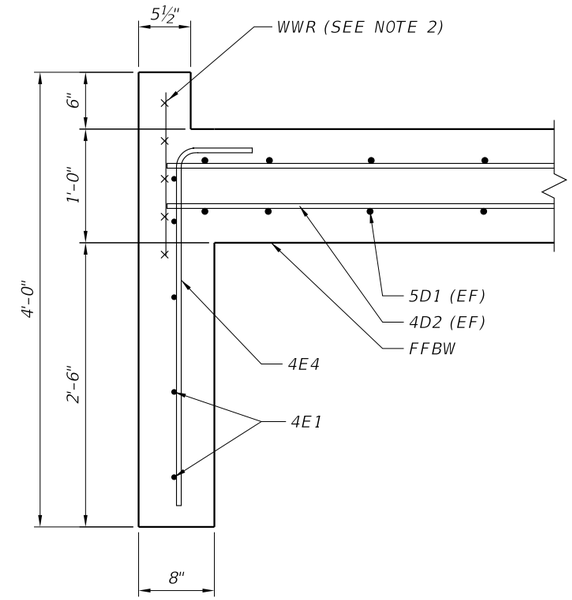

SECTION G-G


(THROUGH CHEEK WALL AND BACKWALL)

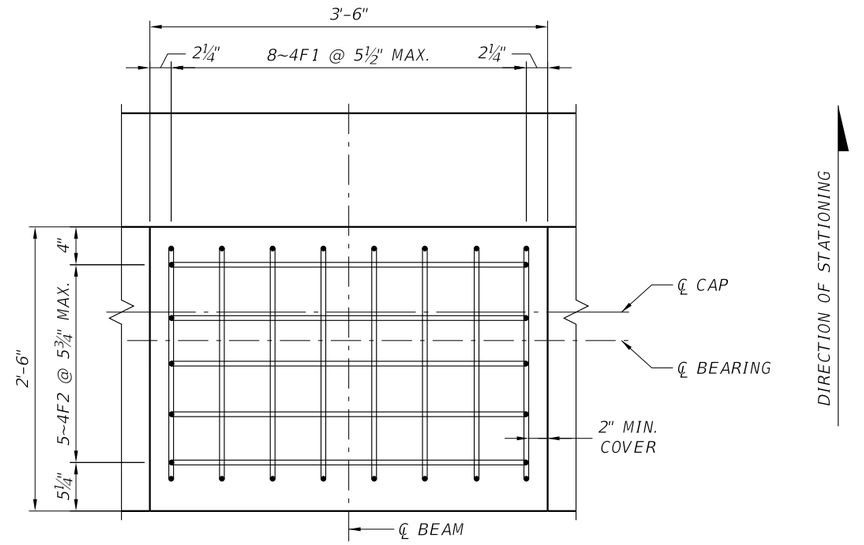

PEDESTAL PLAN

(BEAM LINE 1 SHOWN; BAR SPACING MAY BE ADJUSTED TO CLEAR THE CAP REINFORCEMENT)

TOP OF PEDESTAL ELEVATIONS	
BEAM NO.	ELEVATION (FEET)
2-1	43.760
2-2	43.760

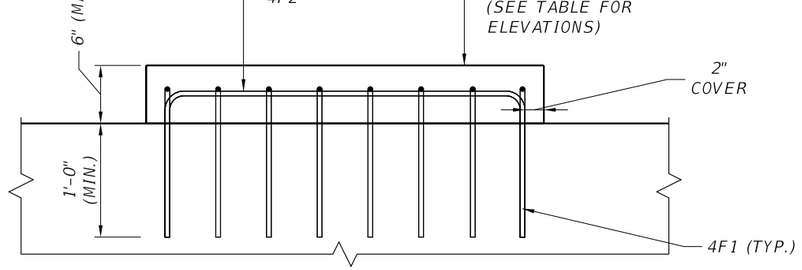

PEDESTAL ELEVATION

NOTES:

1. FOR LOCATION OF SECTIONS F-F AND G-G, SEE VIEW D-D, SHEET B4-19; SECTIONS F-F AND G-G SHOW THE LEFT CHEEK WALL, THE RIGHT CHEEK WALL IS SIMILAR (MIRRORED).
2. WELDED WIRE REINFORCEMENT (WWR) 4x4-W1.4xW1.4 IN THE CHEEK LUGS SHALL BE TIED TO THE END BENT REINFORCING STEEL.
3. CAP AND BACKWALL REINFORCEMENT IS NOT SHOWN IN SECTION F-F FOR CLARITY.
4. PEDESTALS AT THE OTHER BEAM LINES ARE SIMILAR.
5. PEDESTALS ARE CAST ON THE CAP; THE CAP TOP IS A CONSTRUCTION JOINT.
6. FOR REINFORCING BAR LIST, SEE SHEET B4-21.

BRIDGE NO. 729022

REVISIONS

DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

MATTHEW IAN KOSAR
LICENSE NUMBER: 77008
PARSONS TRANSPORTATION GROUP, INC.
1203 GOVERNORS SQUARE BLVD,SUITE 201
TALLAHASSEE, FL 32301

DRAWN BY: MH 07-26
CHECKED BY: JT 07-26
DESIGNED BY: JT 07-26
CHECKED BY: MIK 07-26

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID
SR 9	DUVAL	432259-5-52-01

SHEET TITLE: END BENT 2 DETAILS (3 OF 3)

REF. DWG. NO.:

PROJECT NAME: I-95 CAPACITY IMPROVEMENTS FROM SOUTH OF SR 152 TO SOUTH OF SR 126

SHEET NO.: B4-20

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

MARK		LENGTH	NO	TYP	STY		B	C	D	E	F	H	J	K	N	⌀
SIZE	DES	FT IN	BARS	BAR	A	G	FT IN	FT IN	FT IN	FT IN	FT IN	FT IN	FT IN	FT IN	NO	ANG
END BENT 1 (1 REQUIRED)																
6	A1	20-5	5	1			20-5									
8	A2	20-5	4	1			20-5									
6	A3	20-5	8	1			20-5									
6	B1	11-10	20	4	5	5	2-6	3-0								
6	B2	9-4	16	5			2-6	3-0	1-0	1-0						
5	C	3-9	9	11			2-4	0-10	0-10							
5	D1	4-11 TO 5-2	44	1			4-11 TO 5-2									
4	D2	20-5	10	1			20-5									
4	E1	7-8	10	1			7-8									
4	E2	3-2	6	1			3-2									
4	E3	3-11	6	11			2-10	0-8	0-8							
4	E4	3-8	10	10			3-1¾	0-8								
4	F1	4-6	16	11			2-0¾	1-4	1-4							
4	F2	5-6	10	11			3-2	1-3½	1-3½							
END BENT 2 (1 REQUIRED)																
6	A1	20-5	5	1			20-5									
8	A2	20-5	4	1			20-5									
6	A3	20-5	8	1			20-5									
6	B1	11-10	20	4	5	5	2-6	3-0								
6	B2	9-4	16	5			2-6	3-0	1-0	1-0						
5	C	3-9	9	11			2-4	0-10	0-10							
5	D1	4-11 TO 5-2	44	1			4-11 TO 5-2									
4	D2	20-5	10	1			20-5									
4	E1	7-8	10	1			7-8									
4	E2	3-2	8	1			3-2									
4	E3	3-11	6	11			2-10	0-8	0-8							
4	E4	3-8	8	10			3-1¾	0-8								
4	F1	4-6	16	11			2-0¾	1-4	1-4							
4	F2	5-6	10	11			3-2	1-3½	1-3½							

NOTE:
FOR BAR BENDING DETAILS, REFER TO FDOT STANDARD PLANS INDEX 415-001.

MARK		LENGTH	NO	TYP	STY		B	C	D	E	F	H	J	K	N	⌀
SIZE	DES	FT IN	BARS	BAR	A	G	FT IN	FT IN	FT IN	FT IN	FT IN	FT IN	FT IN	FT IN	NO	ANG
PIER (1 REQUIRED)																
6	A1	18-8	5	1			18-8									
9	A2	18-8	4	1			18-8									
6	A3	18-8	8	1			18-8									
5	B1	12-8	24	4	5	5	2-6	3-6								
5	B2	9-8	24	5			2-6	3-6	0-10	0-10						
5	C	4-1	15	11			2-8	0-10	0-10							
5	D1	4-10	4	11			3-4¾	0-10	0-10							
5	D2	3-10	6	11			2-4¾	0-10	0-10							
4	E1	4-10	12	1			4-10									
4	E2	3-8	12	1			3-8									
4	F1	5-11	16	11			3-5¾	1-4	1-4							
4	F2	5-6	16	11			3-2	1-3½	1-3½							
5	G1	15-8	48	1			15-8									
5	G2	17-8	38	1			17-8									
5	G3	7-2	38	11			2-6	2-5½	2-5½							

NOTES:

1. TYP BAR AND STY ARE THE BAR TYPE AND HOOK STYLE OF STANDARD PLANS INDEX 415-001 (FY 2026-27): TYPE 1 STRAIGHT (B = LENGTH); TYPE 10 L-BAR (B = LONG LEG, C = SHORT LEG); TYPE 11 U-BAR (B = BASE, C AND D = LEGS); TYPE 5 OPEN STIRRUP (B = HEIGHT, C = WIDTH, D AND E = FEET); TYPE 4 CLOSED STIRRUP (B = HEIGHT, C = WIDTH); STYLE 5 = 135° STIRRUP HOOKS.
2. FIELD BEND OPEN STIRRUP HOOKS AS REQUIRED TO CLEAR PILE HEAD LOCATION.
3. LENGTHS ARE THE MODEL CENTERLINE LENGTHS ROUNDED TO THE NEAREST INCH; BEND DIMENSIONS ARE OUT-TO-OUT (SDM 4.3.10.C).
4. MODEL CHECK (REMOVE BEFORE ISSUE): END BENT 1 4E1, END BENT 2 4E1 ARE STRAIGHT IN THE CAD MODEL AND ARE LISTED AS TYPE 1; THEY ARE TO BE TYPE 10 L-BARS. ADD THE LEGS TO THE MODEL.
5. VARYING LENGTHS: END BENT 1 5D1: 8 @ 4'-11", 16 @ 5'-0", 16 @ 5'-1", 4 @ 5'-2". END BENT 2 5D1: 8 @ 4'-11", 16 @ 5'-0", 16 @ 5'-1", 4 @ 5'-2".
6. PILES AND THE CHEEK LUG WELDED WIRE REINFORCEMENT ARE NOT INCLUDED IN THIS LIST.

BRIDGE NO. 729022

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

REVISIONS

DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

MATTHEW IAN KOSAR
LICENSE NUMBER: 77008
PARSONS TRANSPORTATION GROUP, INC.
1203 GOVERNORS SQUARE BLVD,SUITE 201
TALLAHASSEE, FL 32301

DRAWN BY: MH 07-26
CHECKED BY: JT 07-26
DESIGNED BY: JT 07-26
CHECKED BY: MIK 07-26

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID
SR 9	DUVAL	432259-5-52-01

SHEET TITLE: REINFORCING BAR LIST

REF. DWG. NO.:

PROJECT NAME: I-95 CAPACITY IMPROVEMENTS FROM SOUTH OF SR 152 TO SOUTH OF SR 126

SHEET NO.: B4-21