
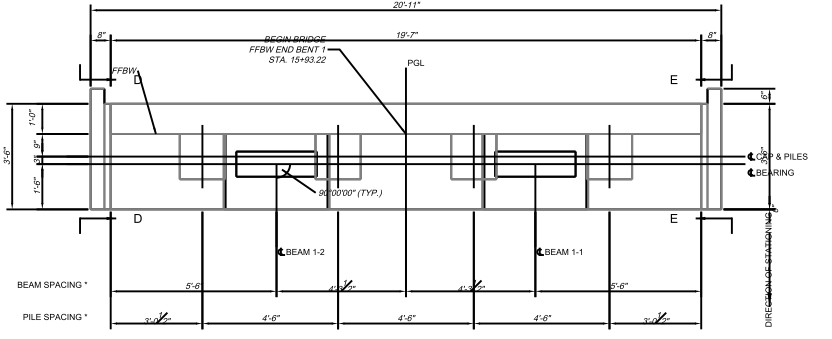


PLAN

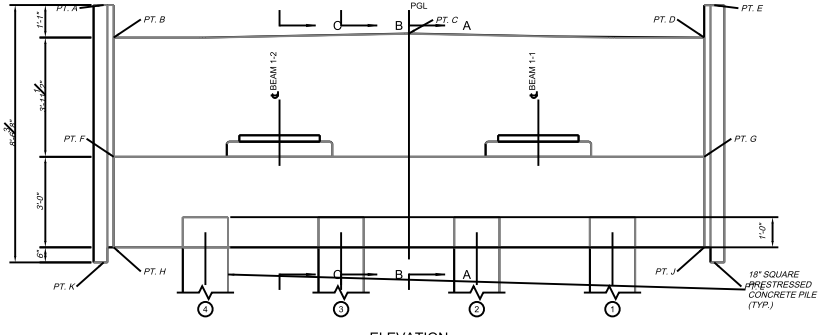

ELEVATION

(LOOKING BACK STATION)

TABLE OF ELEVATIONS		
POINT	LOCATION	ELEVATION
A	TOP OF CHEEK WALL	48.269
B	TOP OF BACKWALL AT END	47.192
C	TOP OF BACKWALL AT PGL	47.328
D	TOP OF BACKWALL AT END	47.192
E	TOP OF CHEEK WALL	48.265
F	TOP OF CAP AT END	43.238
G	TOP OF CAP AT END	43.238
H	BOTTOM OF CAP AT END	40.238
J	BOTTOM OF CAP AT END	40.238
K	BOTTOM OF CHEEK LUG	39.738
L	BOTTOM OF CHEEK LUG	39.738

TOP OF PEDESTAL ELEVATIONS				
BEAM NO.	EL. A	EL. B	EL. C	EL. D
1-1	43.732	43.746	43.732	43.746
1-2	43.732	43.746	43.732	43.746

A, C AT FFBW EDGE; B, D AT SPAN EDGE; LEVEL TRANSVERSELY.

PILE CUTOFF ELEVATIONS		
PILE NO.	CUTOFF EL.	OFFSET FROM PGL
1	41.2	-6'-9"
2	41.2	-2'-3"
3	41.2	2'-3"
4	41.2	6'-9"

NOTES:

1. * DIMENSIONS MEASURED ALONG FFBW.
2. FOR REINFORCEMENT ELEVATION SEE SHEET B4-2.
3. FOR SECTIONS A-A AND B-B SEE SHEET B4-3; FOR SECTION C-C AND PEDESTAL DETAILS SEE SHEET B4-4; FOR VIEWS D-D AND E-E SEE SHEET B4-5.
4. THE SOIL REINFORCEMENT ATTACHED TO THE BACKWALL SHALL BE DESIGNED BY A SPECIALTY ENGINEER FOR A SERVICE LOAD OF ___ K/FT AND A FACTORED LOAD OF ___ K/FT USING THE DESIGN CRITERIA FOR PERMANENT MSE WALLS. COST OF FURNISHING AND INSTALLING THE SOIL REINFORCEMENT IS CONSIDERED INCIDENTAL TO THE COST OF THE END BENT.
5. FOR REINFORCING BAR LIST SEE SHEET B4-15.
6. PILE OFFSETS ARE FROM THE PGL, + TO THE RIGHT LOOKING UP-STATION. CUTOFF ELEVATIONS ARE TO THE NEAREST 0.1 FT.
7. MODEL CHECK (REMOVE BEFORE ISSUE): BACKWALL TOP AT CAP END END BENT 1 IS 47.192 IN THE CAD MODEL AND 47.132 IN THE SELECTED GEOMETRY CAD TABLES; RECONCILE BEFORE ISSUE.

BRIDGE NO.
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO. | COUNTY | FINANCIAL PROJECT ID

SHEET TITLE: END BENT 1


PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4

REF. DWG. NO.:

SHEET NO.: B4-1

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

PRELIMINARY - NOT FOR CONSTRUCTION - GENERATED FROM THE CURRENT FREECAD MODEL

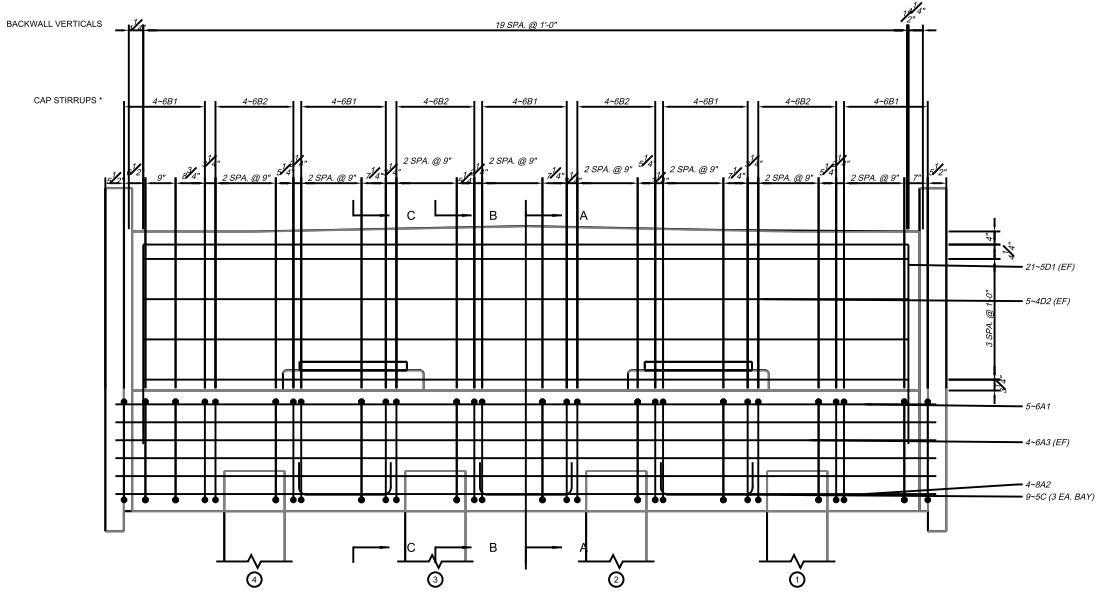

ELEVATION - REINFORCEMENT

(LOOKING BACK STATION)

NOTES:

1. * STIRRUP DIMENSIONS ARE TO BAR CENTERLINES.
2. REINFORCEMENT IS SHOWN REPRESENTATIVELY: THE FIRST AND LAST BAR OF EACH SERIES ARE DRAWN.
3. FOR SECTIONS A-A, B-B AND C-C SEE SHEETS B4-3 AND B4-4.
4. FOR PEDESTAL REINFORCEMENT SEE SHEET B4-4.
5. FOR REINFORCING BAR LIST, SEE SHEET B4-13.

BRIDGE NO. B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO. | COUNTY | FINANCIAL PROJECT ID

END BENT 1 REINFORCEMENT


PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4

REF. DWG. NO.:

SHEET NO.: B4-2


THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

PRELIMINARY - NOT FOR CONSTRUCTION - GENERATED FROM THE CURRENT FREECAD MODEL

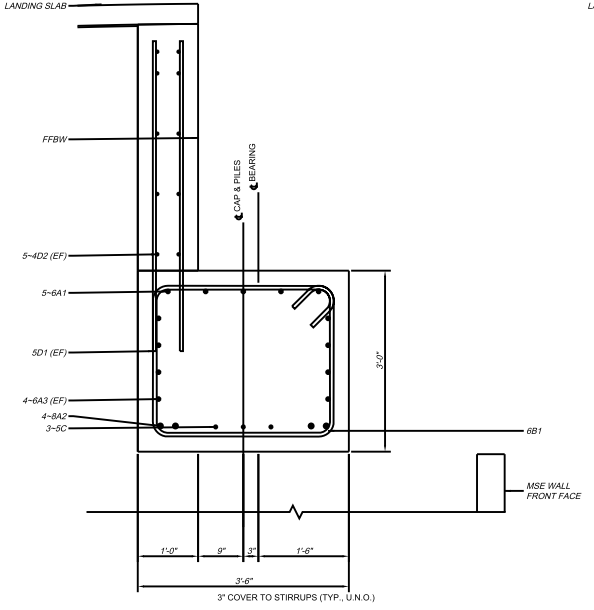

SECTION A-A

(BETWEEN PILES)

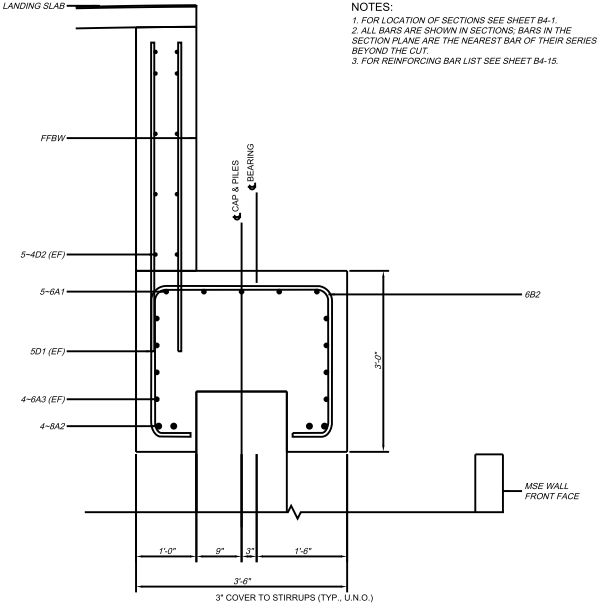

SECTION B-B

(AT PILE)

NOTES:

1. FOR LOCATION OF SECTIONS SEE SHEET B4-1.
2. ALL BARS ARE SHOWN IN SECTIONS; BARS IN THE SECTION PLANE ARE THE NEAREST BAR OF THEIR SERIES BEYOND THE CUT.
3. FOR REINFORCING BAR LIST SEE SHEET B4-15.

BRIDGE NO.
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE: END BENT 1 DETAILS (1 OF 3)


PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4

REF. DWG. NO.:

SHEET NO.: B4-3


THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

PRELIMINARY - NOT FOR CONSTRUCTION - GENERATED FROM THE CURRENT FREECAD MODEL

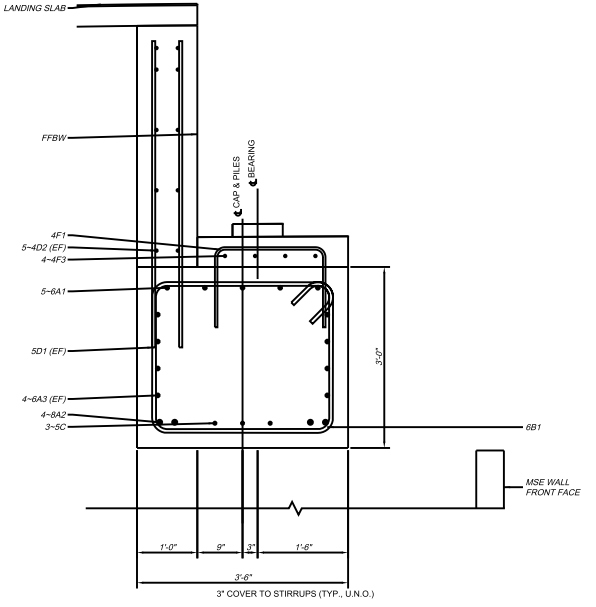


SECTION C-C

(AT CL BEAM)

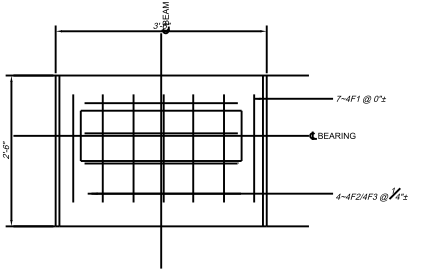

PEDESTAL PLAN

(TYPICAL, BEAM LINE 1 SHOWN)
4F2 AT BEAM LINE 1, 4F3 AT BEAM LINE 2

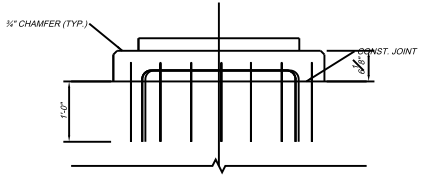

PEDESTAL ELEVATION

(BEAM LINE 1)

NOTES:

1. FOR LOCATION OF SECTION C-C SEE SHEET B4-1.
2. PEDESTAL AT BEAM LINE 2 IS SIMILAR; BAR MARKS AS NOTED.
3. FOR REINFORCING BAR LIST SEE SHEET B4-15.

BRIDGE NO.
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO. | COUNTY | FINANCIAL PROJECT ID

SHEET TITLE: END BENT 1 DETAILS (2 OF 3)


PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4

REF. DWG. NO.:

SHEET NO.: B4-4


THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

PRELIMINARY - NOT FOR CONSTRUCTION - GENERATED FROM THE CURRENT FREECAD MODEL

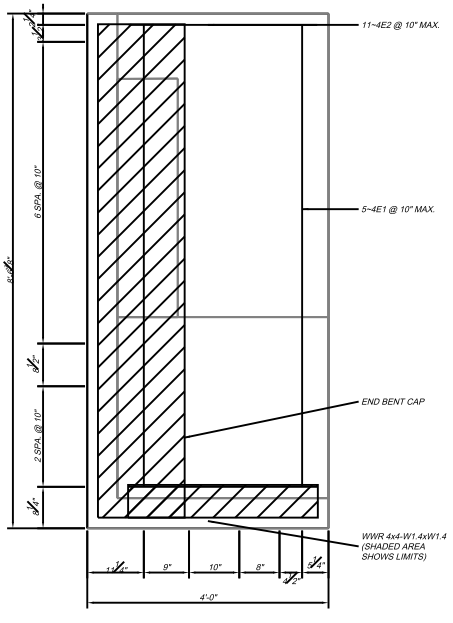

VIEW D-D

(LEFT CHEEK WALL)

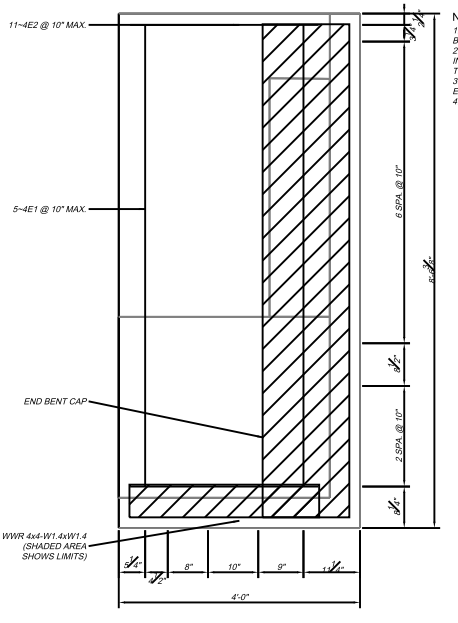

VIEW E-E

(RIGHT CHEEK WALL)

NOTES:

1. FOR LOCATION OF VIEWS D-D AND E-E SEE SHEET B4-1.
2. WELDED WIRE REINFORCEMENT (WWR) 4x4-W1.4xW1.4 IN THE CHEEK LUGS (SHADED AREAS) SHALL BE TIED TO THE END BENT REINFORCING STEEL.
3. FOR CHEEK TOP ELEVATIONS SEE THE TABLE OF ELEVATIONS, SHEET B4-1.
4. FOR REINFORCING BAR LIST SEE SHEET B4-15.

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

BRIDGE NO.
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION


ROAD NO. | COUNTY | FINANCIAL PROJECT ID


SHEET TITLE: END BENT 1 DETAILS (3 OF 3)

REF. DWG. NO.:

PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4

SHEET NO.: B4-5

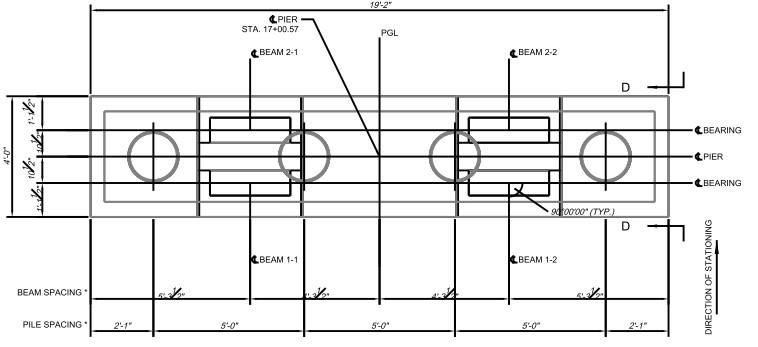

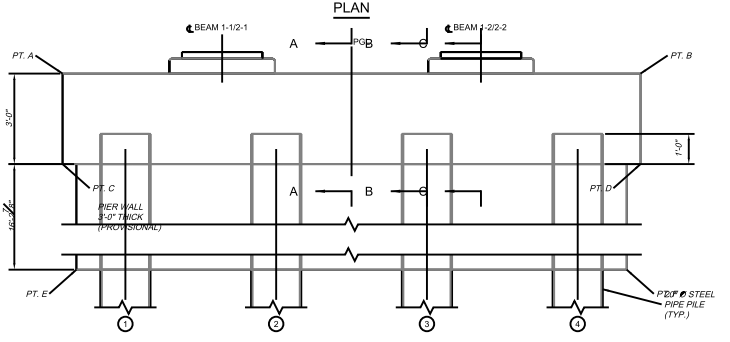

ELEVATION

(LOOKING AHEAD STATION)

TABLE OF ELEVATIONS		
POINT	LOCATION	ELEVATION
A	TOP OF CAP AT END	43.765
B	TOP OF CAP AT END	43.765
C	BOTTOM OF CAP AT END	40.765
D	BOTTOM OF CAP AT END	40.765
E	BOTTOM OF PIER WALL	24.526
F	BOTTOM OF PIER WALL	24.526

TOP OF PEDESTAL ELEVATIONS				
BEAMS	EL. A	EL. E	EL. F	EL. B
1-1 / 2-1	44.260	44.267	44.266	44.261
1-2 / 2-2	44.260	44.267	44.266	44.261

A AT SPAN 1 EDGE, B AT SPAN 2 EDGE, E/F PAD-END BREAKS.

PILE CUTOFF ELEVATIONS		
PILE NO.	CUTOFF EL.	OFFSET FROM PGL
1	41.8	-7'-6"
2	41.8	-2'-6"
3	41.8	2'-6"
4	41.8	7'-6"

NOTES:

1. * DIMENSIONS MEASURED ALONG CL PIER.
2. FOR REINFORCEMENT ELEVATION SEE SHEET B4-7.
3. FOR SECTIONS A-A, B-B AND C-C SEE SHEET B4-8; FOR PEDESTAL DETAILS AND VIEW D-D SEE SHEET B4-9.
4. PIER WALL IS PROVISIONAL (3'-0" THICK); ITS REINFORCEMENT IS NOT SHOWN.
5. FOR REINFORCING BAR LIST SEE SHEET B4-15.
6. PILE OFFSETS ARE FROM THE PGL, + TO THE RIGHT LOOKING UP-STATION. CUTOFF ELEVATIONS ARE TO THE NEAREST 0.1 FT.

BRIDGE NO.
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO. | COUNTY | FINANCIAL PROJECT ID

SHEET TITLE: PIER


REF. DWG. NO.:

PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4

SHEET NO.: B4-6

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

PRELIMINARY - NOT FOR CONSTRUCTION - GENERATED FROM THE CURRENT FREECAD MODEL

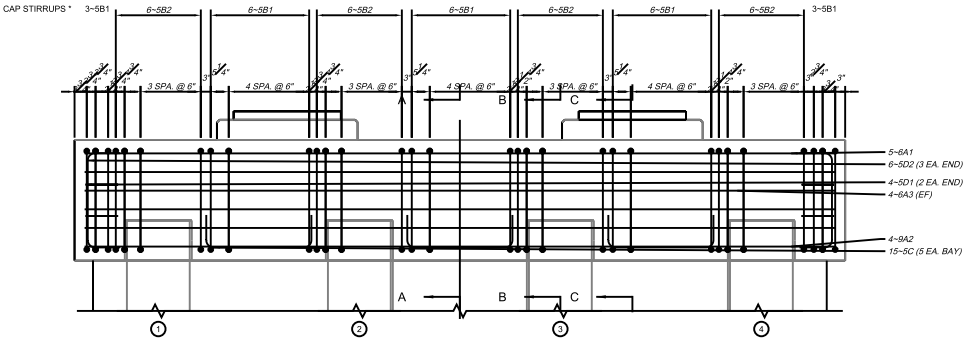

ELEVATION - REINFORCEMENT

(LOOKING AHEAD STATION)

NOTES:

1. * STIRRUP DIMENSIONS ARE TO BAR CENTERLINES.
2. REINFORCEMENT IS SHOWN REPRESENTATIVELY: THE FIRST AND LAST BAR OF EACH SERIES ARE DRAWN.
3. FOR SECTIONS A-A, B-B AND C-C SEE SHEET B4-8.
4. FOR PEDESTAL REINFORCEMENT SEE SHEET B4-9.
5. FOR REINFORCING BAR LIST SEE SHEET B4-15.

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

BRIDGE NO.
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID


SHEET TITLE: PIER REINFORCEMENT

PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4

REF. DWG. NO.:

SHEET NO.: B4-7


PRELIMINARY - NOT FOR CONSTRUCTION - GENERATED FROM THE CURRENT FREECAD MODEL

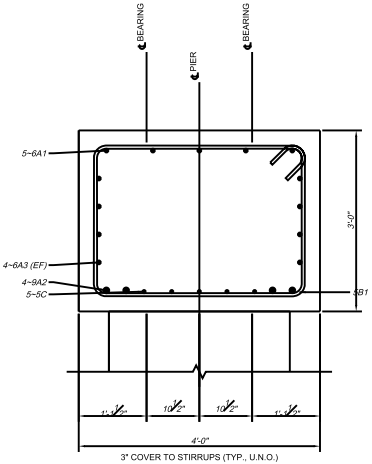

3" COVER TO STIRRUPS (TYP., U.N.O.)

SECTION A-A


(BETWEEN PILES)

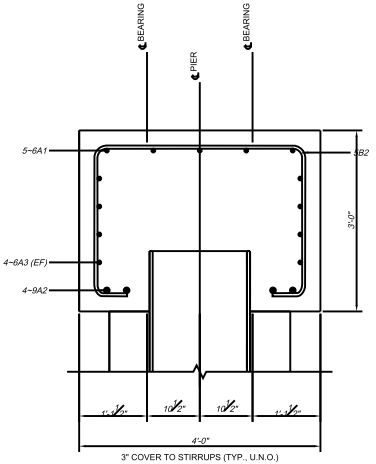

3" COVER TO STIRRUPS (TYP., U.N.O.)

SECTION B-B

(AT PILE)

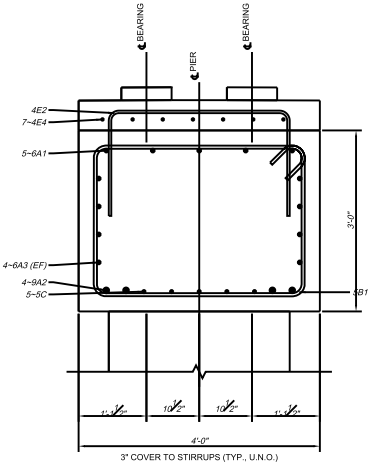

3" COVER TO STIRRUPS (TYP., U.N.O.)

SECTION C-C

(AT CL BEAM)

NOTES:

1. FOR LOCATION OF SECTIONS SEE SHEET B4-6.
2. ALL BARS ARE SHOWN IN SECTIONS; BARS IN THE SECTION PLANE ARE THE NEAREST BAR OF THEIR SERIES BEYOND THE CUT.
3. PIER WALL IS PROVISIONAL; ITS REINFORCEMENT IS NOT SHOWN.
4. FOR REINFORCING BAR LIST SEE SHEET B4-15.

BRIDGE NO.
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE: PIER DETAILS (1 OF 2)


PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4

REF. DWG. NO.:

SHEET NO.: B4-8


THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

PRELIMINARY - NOT FOR CONSTRUCTION - GENERATED FROM THE CURRENT FREECAD MODEL

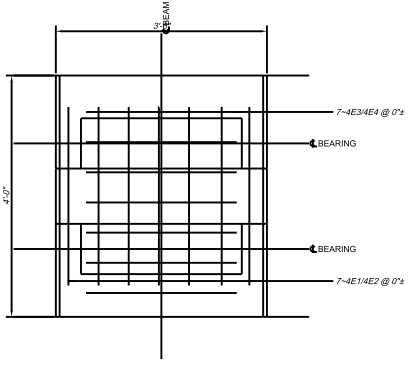


PEDESTAL PLAN

(TYPICAL BEAM LINE 1 SHOWN)
4E1 AT BEAM LINE 1, 4E2 AT BEAM LINE 2
4E3 AT BEAM LINE 1, 4E4 AT BEAM LINE 2

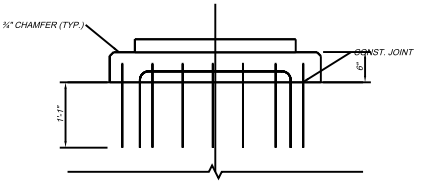

PEDESTAL ELEVATION

(BEAM LINE 1)

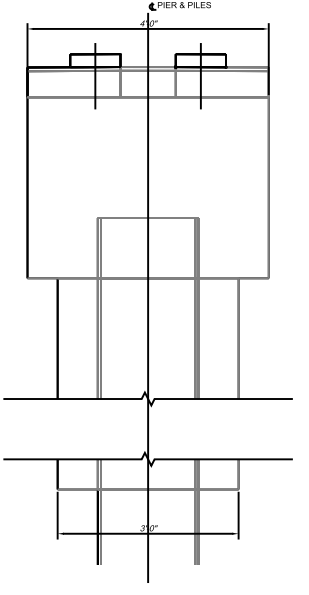

VIEW D-D

(END VIEW)

NOTES:

1. FOR LOCATION OF VIEW D-D SEE SHEET B4-6.
2. PEDESTAL AT BEAM LINE 2 IS SIMILAR; BAR MARKS AS NOTED.
3. PIER WALL IS PROVISIONAL; ITS REINFORCEMENT IS NOT SHOWN.
4. FOR REINFORCING BAR LIST SEE SHEET B4-15.

BRIDGE NO.
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE: PIER DETAILS (2 OF 2)


REF. DWG. NO.:

PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4


SHEET NO.: B4-9

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

PRELIMINARY - NOT FOR CONSTRUCTION - GENERATED FROM THE CURRENT FREECAD MODEL

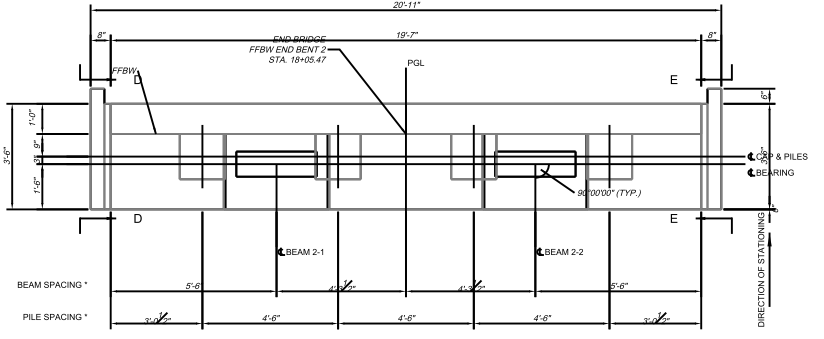

PLAN

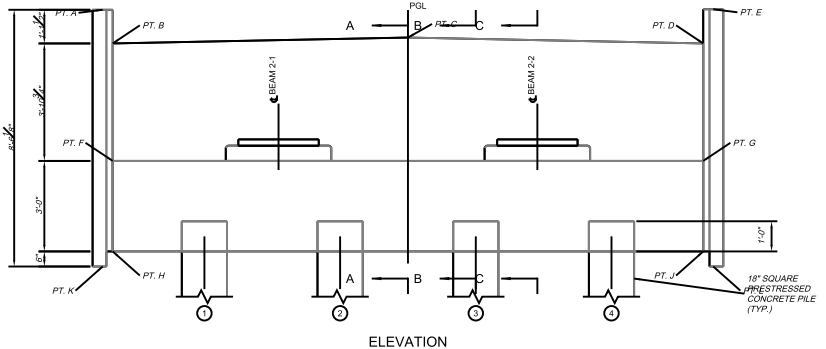

ELEVATION

(LOOKING AHEAD STATION)

TABLE OF ELEVATIONS		
POINT	LOCATION	ELEVATION
A	TOP OF CHEEK WALL	48.260
B	TOP OF BACKWALL AT END	47.144
C	TOP OF BACKWALL AT PGL	47.340
D	TOP OF BACKWALL AT END	47.144
E	TOP OF CHEEK WALL	48.277
F	TOP OF CAP AT END	43.250
G	TOP OF CAP AT END	43.250
H	BOTTOM OF CAP AT END	40.250
J	BOTTOM OF CAP AT END	40.250
K	BOTTOM OF CHEEK LUG	39.750
L	BOTTOM OF CHEEK LUG	39.750

TOP OF PEDESTAL ELEVATIONS				
BEAM NO.	EL. A	EL. B	EL. C	EL. D
2-1	43.743	43.760	43.743	43.760
2-2	43.743	43.760	43.743	43.760

A, C AT FFBW EDGE; B, D AT SPAN EDGE; LEVEL TRANSVERSELY.

PILE CUTOFF ELEVATIONS		
PILE NO.	CUTOFF EL.	OFFSET FROM PGL
1	41.2	-6'-9"
2	41.2	-2'-3"
3	41.2	2'-3"
4	41.2	6'-9"

NOTES:

1. * DIMENSIONS MEASURED ALONG FFBW.
2. FOR REINFORCEMENT ELEVATION SEE SHEET B4-11.
3. FOR SECTIONS A-A AND B-B SEE SHEET B4-12; FOR SECTION C-C AND PEDESTAL DETAILS SEE SHEET B4-13; FOR VIEWS D-D AND E-E SEE SHEET B4-14.
4. THE SOIL REINFORCEMENT ATTACHED TO THE BACKWALL SHALL BE DESIGNED BY A SPECIALTY ENGINEER FOR A SERVICE LOAD OF ___ K/FT AND A FACTORED LOAD OF ___ K/FT USING THE DESIGN CRITERIA FOR PERMANENT MSE WALLS. COST OF FURNISHING AND INSTALLING THE SOIL REINFORCEMENT IS CONSIDERED INCIDENTAL TO THE COST OF THE END BENT.
5. FOR REINFORCING BAR LIST SEE SHEET B4-15.
6. PILE OFFSETS ARE FROM THE PGL, + TO THE RIGHT LOOKING UP-STATION. CUTOFF ELEVATIONS ARE TO THE NEAREST 0.1 FT.

BRIDGE NO.
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO. | COUNTY | FINANCIAL PROJECT ID

SHEET TITLE: END BENT 2


PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4

REF. DWG. NO.:

SHEET NO.: B4-10

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

PRELIMINARY - NOT FOR CONSTRUCTION - GENERATED FROM THE CURRENT FREECAD MODEL

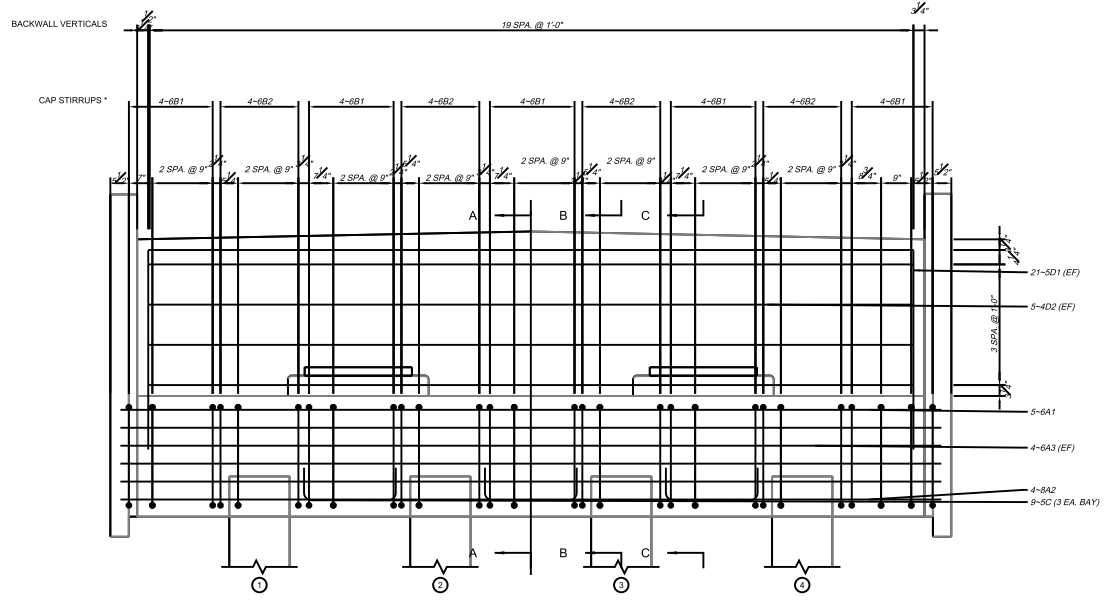

ELEVATION - REINFORCEMENT

(LOOKING AHEAD STATION)

NOTES:

1. * STIRRUP DIMENSIONS ARE TO BAR CENTERLINES.
2. REINFORCEMENT IS SHOWN REPRESENTATIVELY: THE FIRST AND LAST BAR OF EACH SERIES ARE DRAWN.
3. FOR SECTIONS A-A, B-B AND C-C SEE SHEETS B4-12.
4. FOR PEDESTAL REINFORCEMENT SEE SHEET B4-13.
5. FOR REINFORCING BAR LIST SEE SHEET B4-15.

BRIDGE NO. 940 PEDESTRIAN BRIDGE

REVISIONS

DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

END BENT 2 REINFORCEMENT

PROJECT NAME:
D2 I-95 PEDESTRIAN BRIDGE - B4

REF. DWG. NO.


SHEET NO.
B4-11

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

PRELIMINARY - NOT FOR CONSTRUCTION - GENERATED FROM THE CURRENT FREECAD MODEL


NOTES:

1. FOR LOCATION OF SECTIONS SEE SHEET B4-10.
2. ALL BARS ARE SHOWN IN SECTIONS. BARS IN THE SECTION PLANE ARE THE NEAREST BAR OF THEIR SERIES BEYOND THE CUT.
3. FOR REINFORCING BAR LIST SEE SHEET B4-15.

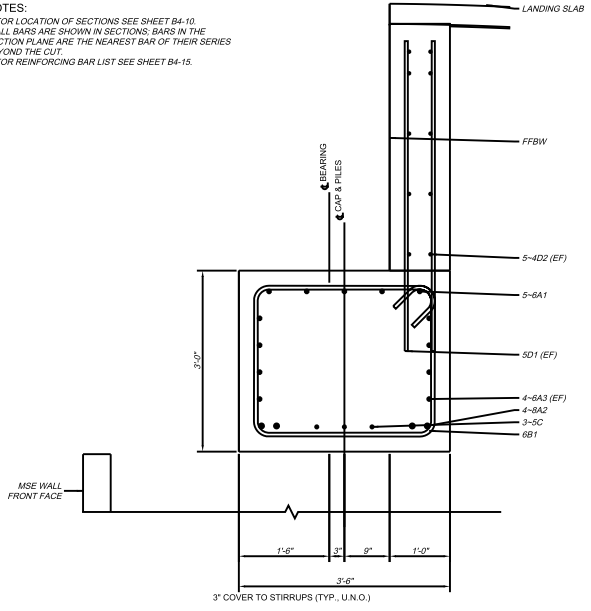

SECTION A-A

(BETWEEN PILES)

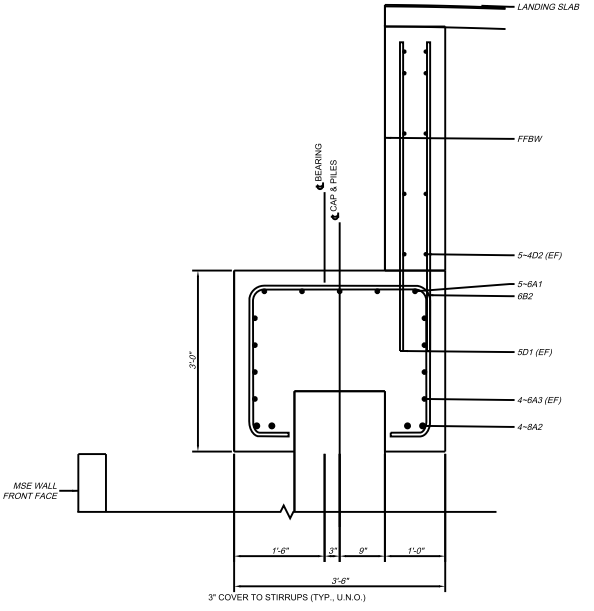

SECTION B-B

(AT PILE)

BRIDGE NO.
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE: END BENT 2 DETAILS (1 OF 3)


PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4

REF. DWG. NO.:

SHEET NO.: B4-12

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.


PRELIMINARY - NOT FOR CONSTRUCTION - GENERATED FROM THE CURRENT FREECAD MODEL

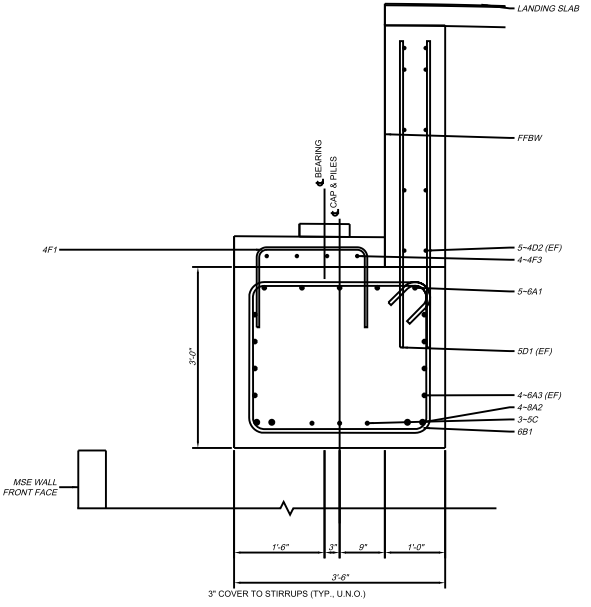

3" COVER TO STIRRUPS (TYP., U.N.O.)


SECTION C-C

(AT CL BEAM)

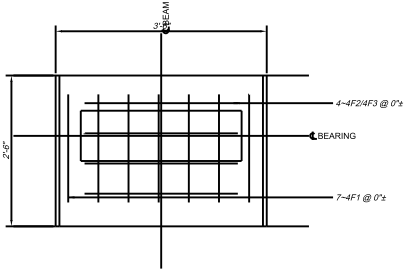

PEDESTAL PLAN

(TYPICAL, BEAM LINE 1 SHOWN)
4F2 AT BEAM LINE 1, 4F3 AT BEAM LINE 2

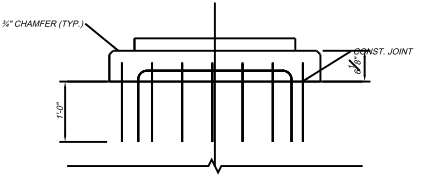

PEDESTAL ELEVATION

(BEAM LINE 1)

NOTES:

1. FOR LOCATION OF SECTION C-C SEE SHEET B4-10.
2. PEDESTAL AT BEAM LINE 2 IS SIMILAR; BAR MARKS AS NOTED.
3. FOR REINFORCING BAR LIST SEE SHEET B4-15.

BRIDGE NO.
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE: END BEND 2 DETAILS (2 OF 3)


PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4

REF. DWG. NO.:

SHEET NO.: B4-13


THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

PRELIMINARY - NOT FOR CONSTRUCTION - GENERATED FROM THE CURRENT FREECAD MODEL

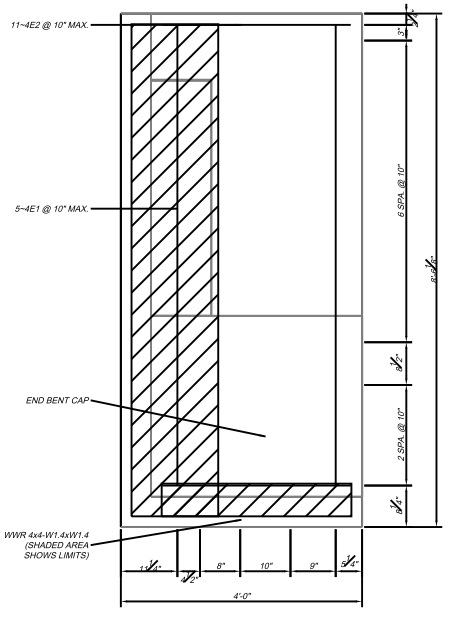

VIEW D-D

(LEFT CHEEK WALL)

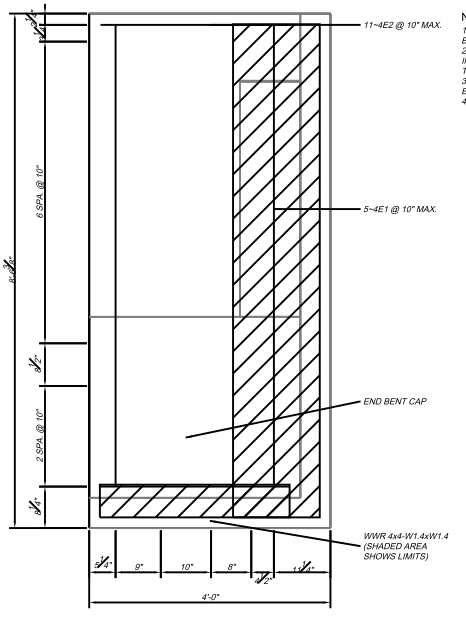

VIEW E-E

(RIGHT CHEEK WALL)

NOTES:

1. FOR LOCATION OF VIEWS D-D AND E-E SEE SHEET B4-10.
2. WELDED WIRE REINFORCEMENT (WWR) 4x4-W1.4xW1.4 IN THE CHEEK LUGS (SHADED AREAS) SHALL BE TIED TO THE END BENT REINFORCING STEEL.
3. FOR CHEEK TOP ELEVATIONS SEE THE TABLE OF ELEVATIONS, SHEET B4-10.
4. FOR REINFORCING BAR LIST SEE SHEET B4-15.

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

BRIDGE NO.
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO. | COUNTY | FINANCIAL PROJECT ID

SHEET TITLE: END BENT 2 DETAILS (3 OF 3)

REF. DWG. NO.:

PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4

SHEET NO.: B4-14

END BENT 1 (1 REQUIRED)

SIZE	DES	NO.	LENGTH	SHAPE	A	B	C	D	E	LOCATION
6	A1	5	20'-5"	STRAIGHT	20'-5"					CAP TOP
8	A2	4	20'-5"	STRAIGHT	20'-5"					CAP BOTTOM
6	A3	8	20'-5"	STRAIGHT	20'-5"					CAP SIDE FACES
6	B1	20	11'-10"	CLOSED HOOP	3'-0"	2'-6"			H=1'-4"	CAP HOOP
6	B2	16	9'-4"	OPEN STIRRUP	1'-0"	2'-6"	3'-0"	2'-6"	1'-0"	CAP STIRRUP AT PILES
5	C	9	3'-9"	U-BAR	10"	2'-4"	10"			CAP BETWEEN PILES
5	D1	42	VARIES	STRAIGHT	4'-11 15/16"					BACKWALL VERTICAL
4	D2	10	19'-1"	STRAIGHT	19'-1 15/16"					BACKWALL HORIZONTAL
4	E1	10	7'-8"	STRAIGHT	7'-7 15/16"					CHEEK WALL VERTICAL
4	E2	22	3'-2"	STRAIGHT	3'-1 15/16"					CHEEK WALL HORIZONTAL
4	F1	14	4'-3"	U-BAR	1'-4"	1'-10"	1'-4"			PEDESTAL, TRANSVERSE
4	F2	4	4'-9"	U-BAR	1'-3 7/16"	2'-7"	1'-3 7/16"			PEDESTAL, LONGITUDINAL
4	F3	4	4'-8"	U-BAR	1'-3 7/16"	2'-6 7/8"	1'-3 7/16"			PEDESTAL, LONGITUDINAL


END BENT 2 (1 REQUIRED)

SIZE	DES	NO.	LENGTH	SHAPE	A	B	C	D	E	LOCATION
6	A1	5	20'-5"	STRAIGHT	20'-5"					CAP TOP
8	A2	4	20'-5"	STRAIGHT	20'-5"					CAP BOTTOM
6	A3	8	20'-5"	STRAIGHT	20'-5"					CAP SIDE FACES
6	B1	20	11'-10"	CLOSED HOOP	3'-0"	2'-6"			H=1'-4"	CAP HOOP
6	B2	16	9'-4"	OPEN STIRRUP	1'-0"	2'-6"	3'-0"	2'-6"	1'-0"	CAP STIRRUP AT PILES
5	C	9	3'-9"	U-BAR	10"	2'-4"	10"			CAP BETWEEN PILES
5	D1	42	VARIES	STRAIGHT	4'-11 15/16"					BACKWALL VERTICAL
4	D2	10	19'-1"	STRAIGHT	19'-1 15/16"					BACKWALL HORIZONTAL
4	E1	10	7'-8"	STRAIGHT	7'-7 15/16"					CHEEK WALL VERTICAL
4	E2	22	3'-2"	STRAIGHT	3'-1 15/16"					CHEEK WALL HORIZONTAL
4	F1	14	4'-3"	U-BAR	1'-4"	1'-10"	1'-4"			PEDESTAL, TRANSVERSE
4	F2	4	4'-9"	U-BAR	1'-3 7/16"	2'-7"	1'-3 7/16"			PEDESTAL, LONGITUDINAL
4	F3	4	4'-9"	U-BAR	1'-3 7/16"	2'-6 7/8"	1'-3 7/16"			PEDESTAL, LONGITUDINAL

PIER (1 REQUIRED)

SIZE	DES	NO.	LENGTH	SHAPE	A	B	C	D	E	LOCATION
6	A1	5	18'-8"	STRAIGHT	18'-8"					CAP TOP
9	A2	4	18'-8"	STRAIGHT	18'-8"					CAP BOTTOM
6	A3	8	18'-8"	STRAIGHT	18'-8"					CAP SIDE FACES
5	B1	24	12'-9"	CLOSED HOOP	3'-6"	2'-6"			H=1'-4"	CAP HOOP
5	B2	24	9'-8"	OPEN STIRRUP	10"	2'-6"	3'-6"	2'-6"	10"	CAP STIRRUP AT PILES
5	C	15	4'-1"	U-BAR	10"	2'-8"	10"			CAP BETWEEN PILES
5	D1	4	4'-10"	U-BAR	10"	3'-3 7/16"	10"			CAP END, HORIZONTAL
5	D2	6	3'-10"	U-BAR	10"	2'-3 7/16"	10"			CAP END, VERTICAL
4	E1	7	5'-7"	U-BAR	1'-5"	3'-0"	1'-5"			PEDESTAL, TRANSVERSE
4	E2	7	6'-3"	U-BAR	1'-9"	3'-0"	1'-9"			PEDESTAL, TRANSVERSE
4	E3	7	4'-11"	U-BAR	1'-3 7/16"	2'-3 7/16"	1'-3 7/16"			PEDESTAL, LONGITUDINAL
4	E4	7	5'-8"	U-BAR	1'-3 7/16"	2'-3 7/16"	1'-3 7/16"			PEDESTAL, LONGITUDINAL

BENDING DIAGRAMS (NOT TO SCALE)



STRAIGHT BARS: A = LENGTH.

NOTES:

1. BAR DIMENSIONS ARE OUT-TO-OUT (SDM 4.3.10.C); LENGTHS ARE THE MODEL CENTERLINE LENGTHS ROUNDED TO THE NEAREST INCH.
2. DIMENSION LETTERS REFER TO THE BENDING DIAGRAMS ON THIS SHEET. STANDARD PLANS INDEX 415-001 BAR TYPE NUMBERS ARE NOT ASSIGNED; ASSIGN THEM WITH THE FDOT REBAR PROGRAM BEFORE ISSUE.
3. H IS THE STRAIGHT TAIL BEYOND EACH 135?? HOOK. OPEN STIRRUP LEGS A AND E ARE TURNED IN PLAN TO CLEAR THE PILE.
4. VARYING LENGTHS: END BENT 1 SD1: 6 @ 4'-11", 16 @ 5'-0", 16 @ 5'-1", 4 @ 5'-2". END BENT 2 SD1: 6 @ 4'-11", 16 @ 5'-0", 16 @ 5'-1", 4 @ 5'-2".
5. PILES AND THE CHEEK LUG WELDED WIRE REINFORCEMENT ARE NOT INCLUDED IN THIS LIST.

BRIDGE NO.
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE: REINFORCING BAR LIST

PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4

REF. DWG. NO.:

SHEET NO.: B4-15

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.