
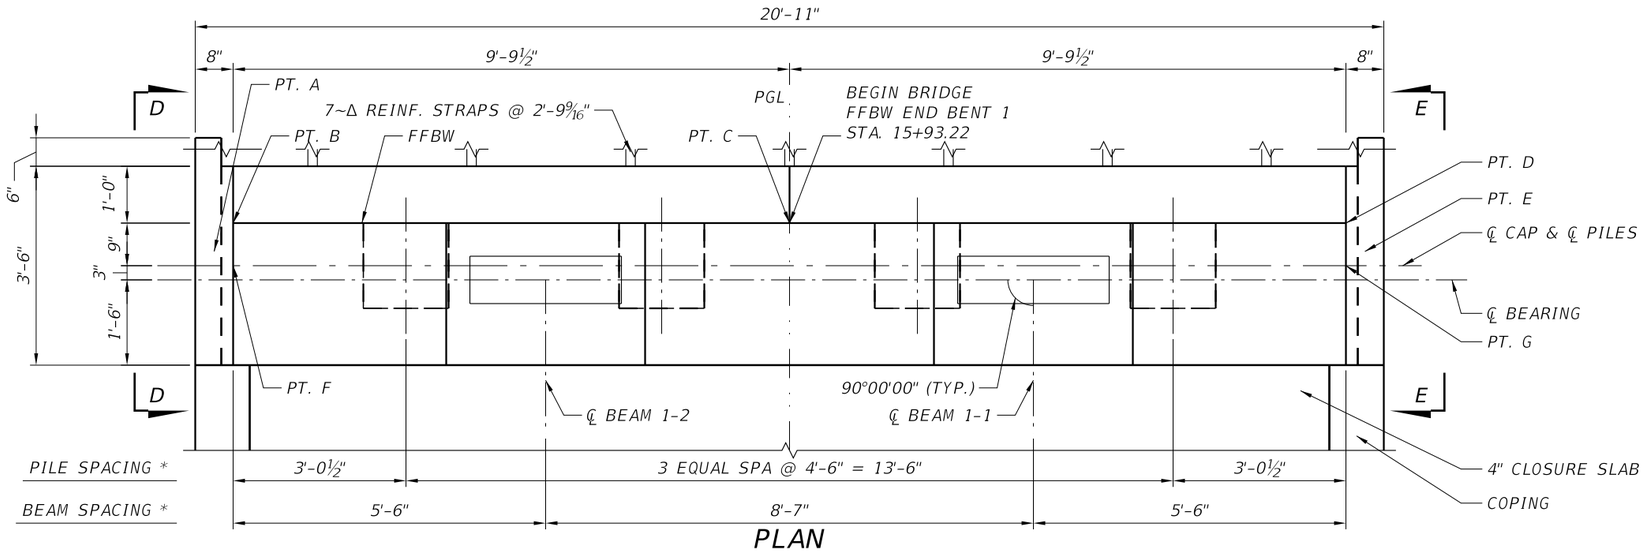


PLAN

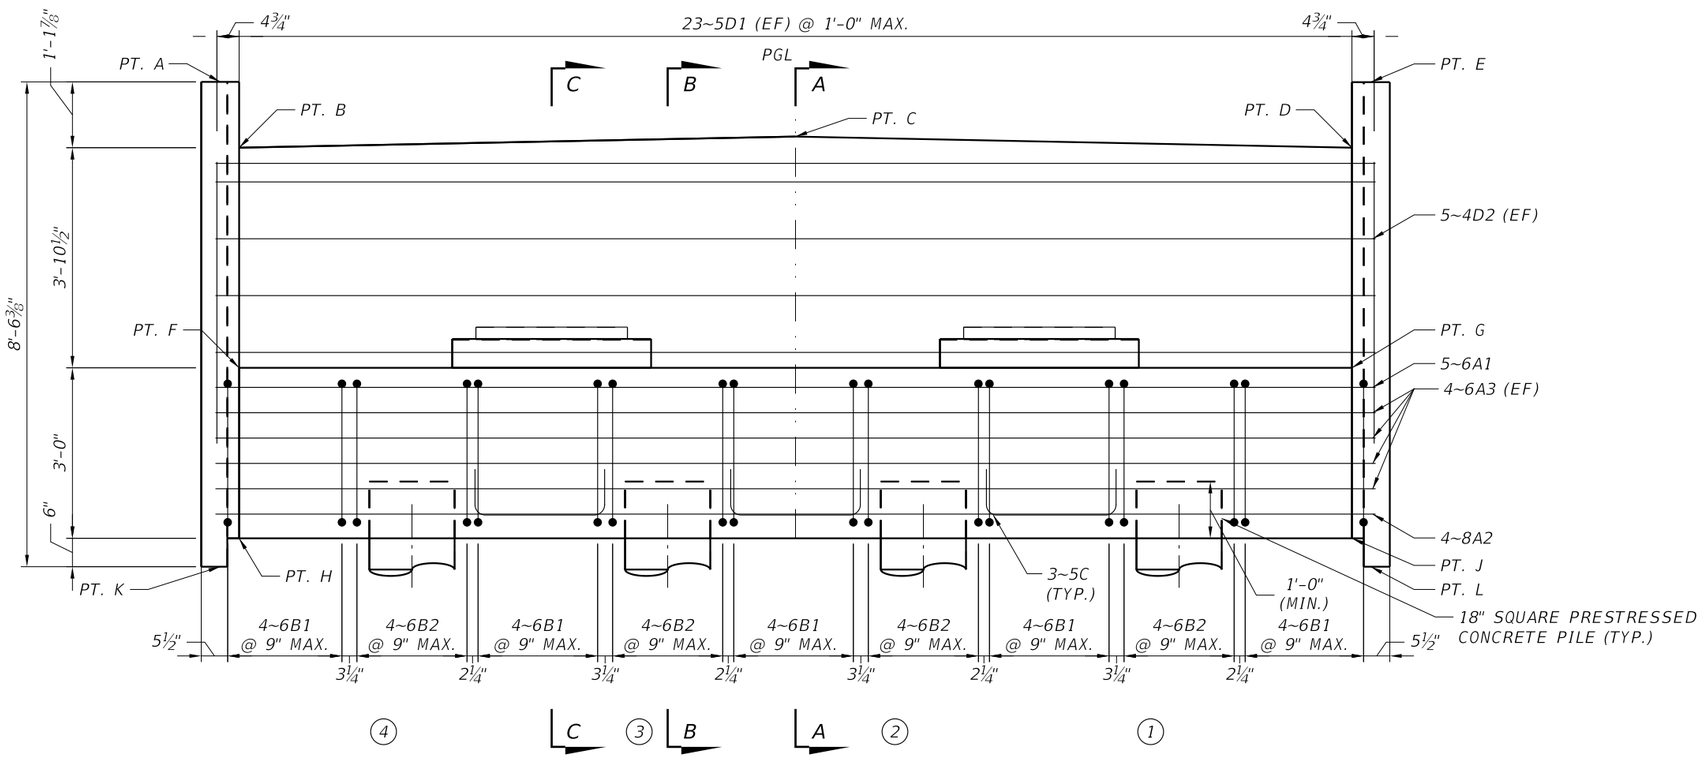

ELEVATION
(LOOKING BACK STATION)

* DIMENSIONS MEASURED ALONG FFBW

TABLE OF ELEVATIONS	
POINT	ELEVATION
A	48.269
B	47.111
C	47.307
D	47.111
E	48.265
F	43.238
G	43.238
H	40.238
J	40.238
K	39.738
L	39.738

PILE CUTOFF ELEVATIONS		
PILE NO.	CUTOFF EL.	PGL OFFSET
1	41.2	-6'-9"
2	41.2	-2'-3"
3	41.2	2'-3"
4	41.2	6'-9"

DIRECTION OF STATIONING

NOTES:

1. STIRRUP SPACING IS DIMENSIONED TO BAR CENTERLINES.
2. REINFORCEMENT IS SHOWN REPRESENTATIVELY: THE FIRST AND LAST BAR OF EACH RUN ARE DRAWN.
3. FOR SECTIONS A-A AND B-B AND DETAILS "A" AND "B", SEE SHEET B4-2. FOR SECTION C-C AND VIEWS D-D AND E-E, SEE SHEET B4-3. FOR SECTIONS F-F AND G-G AND PEDESTAL DETAILS, SEE SHEET B4-4.
4. FOR THE SOIL REINFORCEMENT (Δ) LEGEND, SEE SHEET B4-2.
5. FOR REINFORCING BAR LIST, SEE SHEET B4-12.
6. PILE OFFSETS ARE FROM THE PGL, + TO THE RIGHT LOOKING UP-STATION. CUTOFF ELEVATIONS ARE TO THE NEAREST 0.1 FT.

BRIDGE NO. _____
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE: END BENT 1


PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4

REF. DWG. NO.


SHEET NO. B4-1

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.


FREECAD MODEL SHA-256 A831DEC890841953
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.5.0)

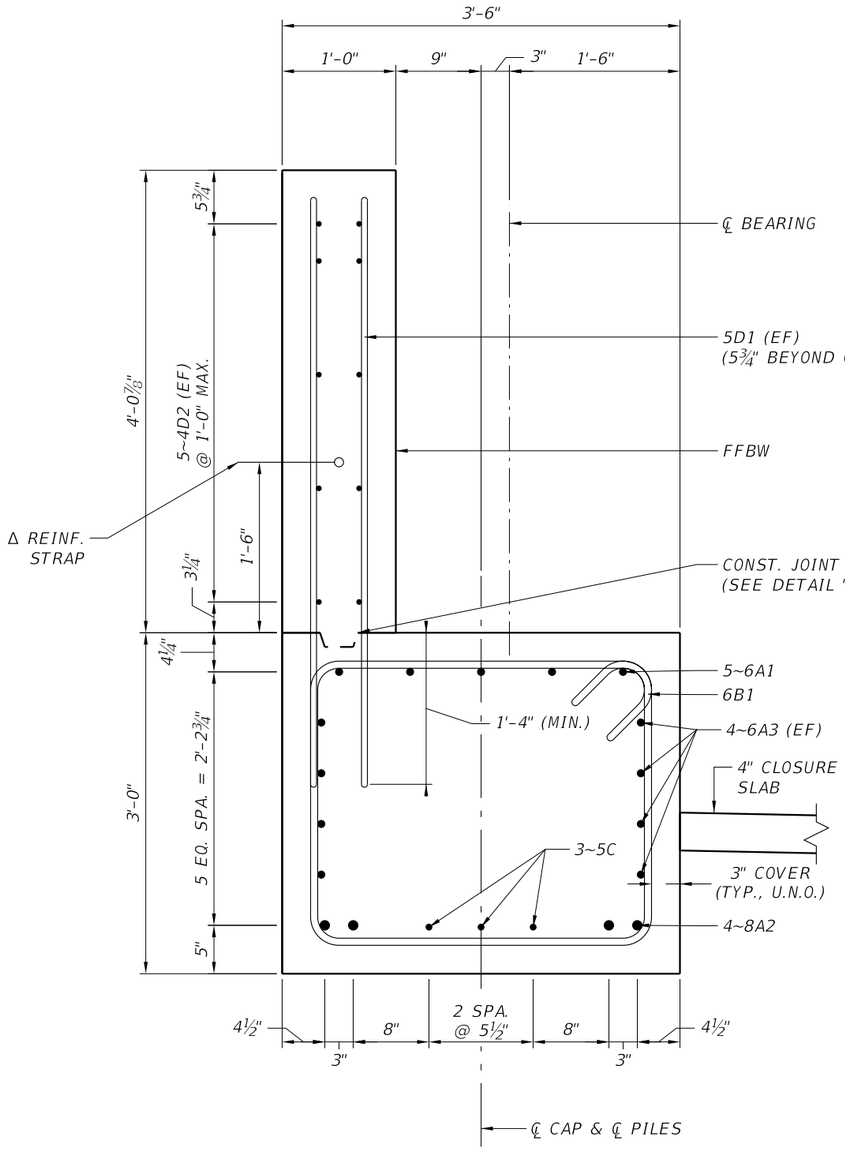


SECTION A-A
(SECTION BETWEEN PILES)

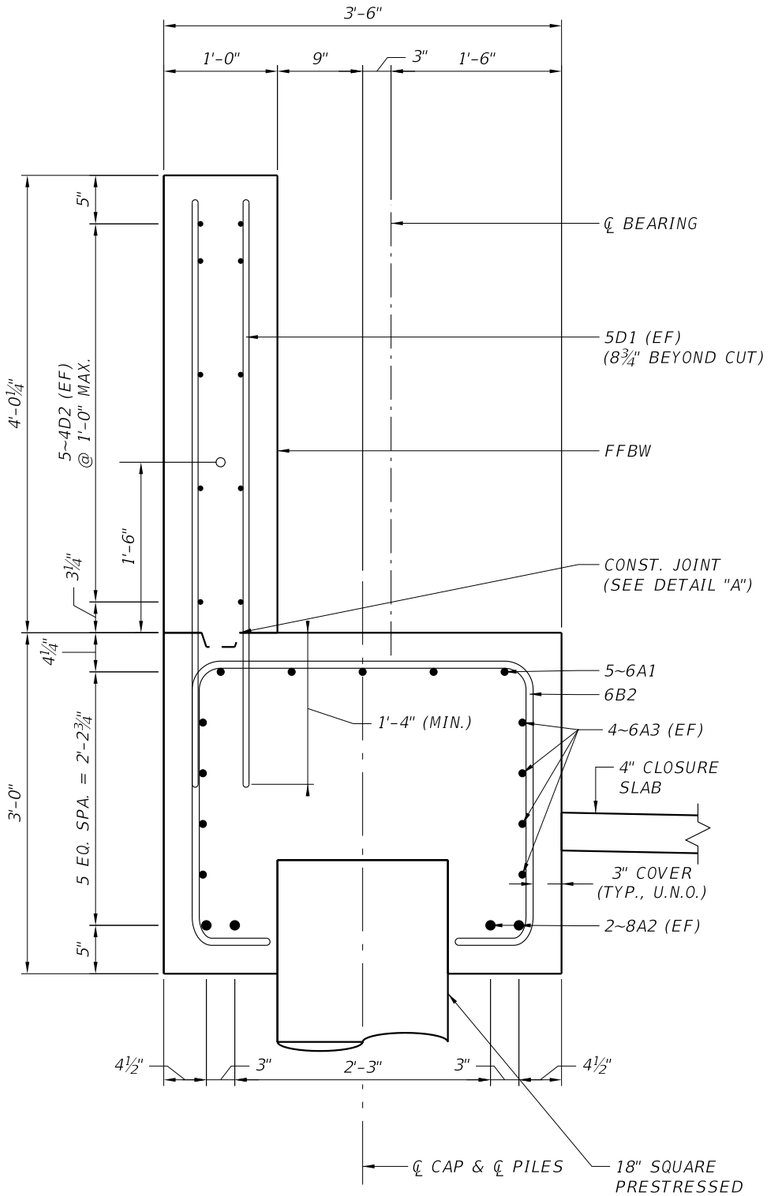

SECTION B-B
(SECTION AT PILES)

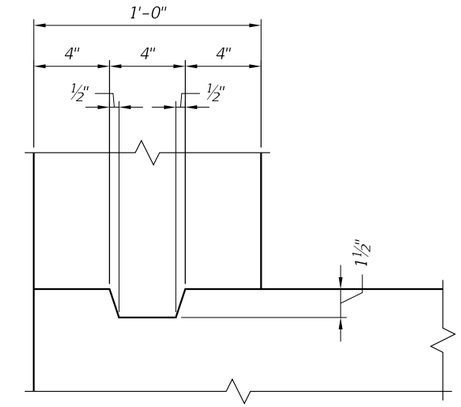

DETAIL "A"
(CONSTRUCTION JOINT)

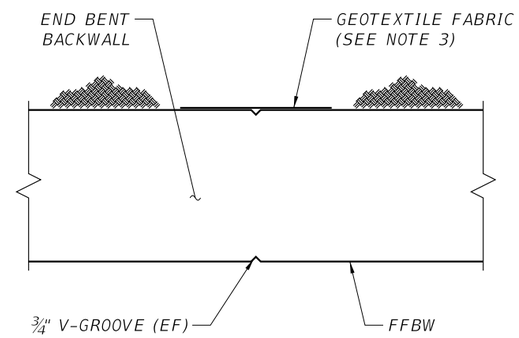

DETAIL "B"
(END BENT BACKWALL V-GROOVE)

LEGEND:

Δ REINFORCING STRAPS AND ATTACHMENTS FOR THE END BENT SHALL BE DESIGNED AND FURNISHED BY THE PROPRIETARY WALL PROVIDER. THE STRAPS SHALL BE DESIGNED TO RESIST A SERVICE LOAD OF 3.09 K/FT AND A FACTORED LOAD OF 3.75 K/FT (STRENGTH I) PERPENDICULAR TO THE END BENT BACKWALL.

NOTES:


1. FOR LOCATION OF SECTIONS, SEE SHEET B4-1.
2. ALL BARS ARE SHOWN IN SECTIONS; BARS IN THE SECTION PLANE ARE THE NEAREST BAR OF THEIR SERIES WITHIN 1'-3" BEYOND THE CUT.
3. ATTACH TYPE D-5 (SPECIFICATIONS SECTION 985) GEOTEXTILE FABRIC, 1'-0" WIDE AND FULL HEIGHT OF FILL, TO THE BACK OF BACKWALL AT V-GROOVE LOCATIONS WITH AN ADHESIVE APPROVED BY THE ENGINEER.
4. MODEL CHECK (REMOVE BEFORE ISSUE): DETAILS "A" AND "B" ARE SCHEMATIC; THE CONSTRUCTION JOINT KEY AND THE V-GROOVE LOCATIONS ARE NOT IN THE CAD MODEL.
5. FOR REINFORCING BAR LIST, SEE SHEET B4-12.

BRIDGE NO. _____
B4 PEDESTRIAN BRIDGE


REVISIONS						ENGINEER OF RECORD:	DRAWN BY:	STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION			SHEET TITLE: END BENT 1 DETAILS (1 OF 3)	REF. DWG. NO.
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION		CHECKED BY:					
							DESIGNED BY:	ROAD NO.	COUNTY	FINANCIAL PROJECT ID	PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE – B4	SHEET NO. B4-2
							CHECKED BY:					

FREECAD MODEL SHA-256 A831DEC890841953
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.5.0)


THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

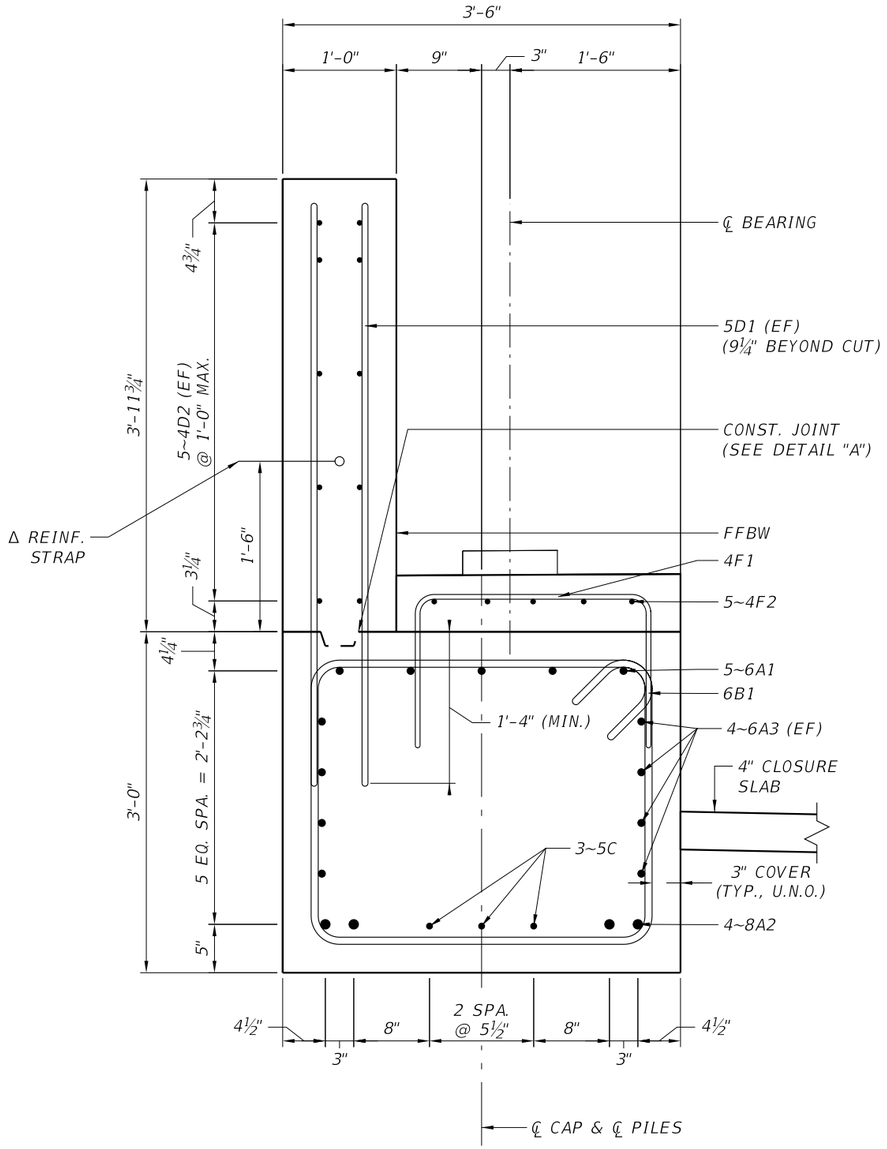

SECTION C-C
(SECTION AT CENTERLINE OF BEAM)

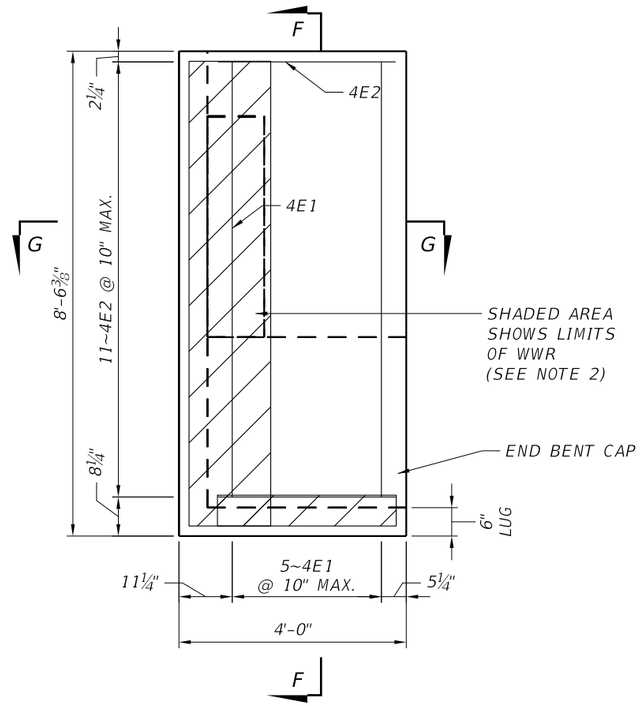

VIEW D-D
(LEFT CHEEK WALL)

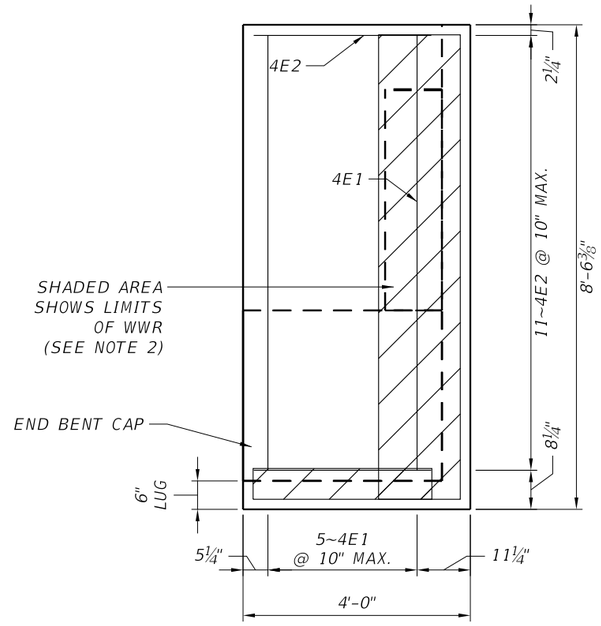

VIEW E-E
(RIGHT CHEEK WALL)

NOTES:


1. FOR LOCATION OF SECTION C-C AND VIEWS D-D AND E-E, SEE SHEET B4-1.
2. WELDED WIRE REINFORCEMENT (WWR) 4x4-W1.4xW1.4 IN THE CHEEK LUGS SHALL BE TIED TO THE END BENT REINFORCING STEEL.
3. FOR CHEEK TOP ELEVATIONS, SEE THE TABLE OF ELEVATIONS, SHEET B4-1.
4. SECTIONS F-F AND G-G ARE LOCATED IN VIEW D-D; FOR SECTIONS F-F AND G-G, SEE SHEET B4-4.
5. FOR THE Δ REINFORCING STRAP LEGEND, SEE SHEET B4-2.
6. MODEL CHECK (REMOVE BEFORE ISSUE): THE BACKWALL TOP IS LEVEL ACROSS THE WALL THICKNESS IN THE CAD MODEL (ITS SLOPE RUNS ALONG THE BENT TO THE CROWN ONLY); THE SECTIONS SHOW THE MODEL. ADD THE CROSS SLOPE TO THE MODEL.
7. FOR REINFORCING BAR LIST, SEE SHEET B4-12.

BRIDGE NO. _____
B4 PEDESTRIAN BRIDGE

REVISIONS						ENGINEER OF RECORD:	DRAWN BY:	STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION			SHEET TITLE: END BENT 1 DETAILS (2 OF 3)	REF. DWG. NO.
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION		CHECKED BY:					
							DESIGNED BY:	ROAD NO.	COUNTY	FINANCIAL PROJECT ID	PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE – B4	SHEET NO. B4-3
							CHECKED BY:					


THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

FREECAD MODEL SHA-256 A831DEC890841953
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.5.0)

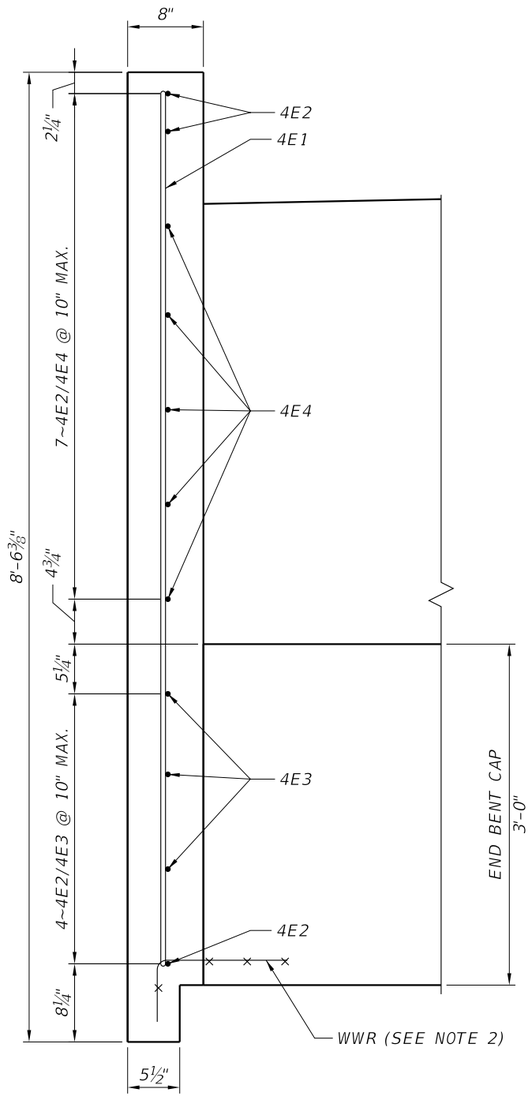


SECTION F-F

(THROUGH CHEEK WALL)

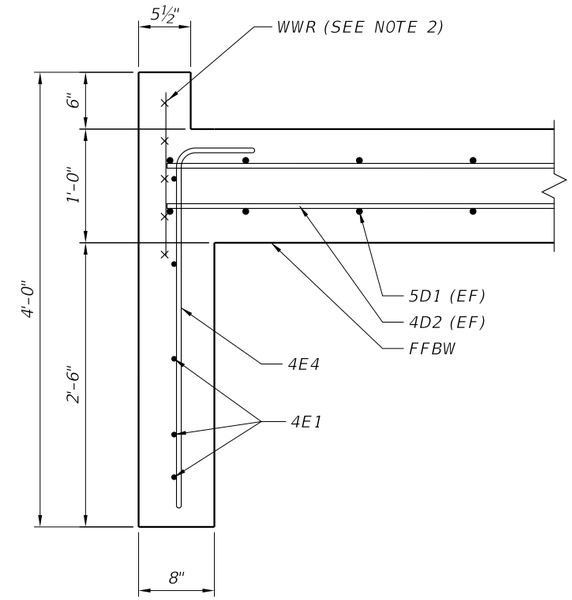

SECTION G-G

(THROUGH CHEEK WALL AND BACKWALL)

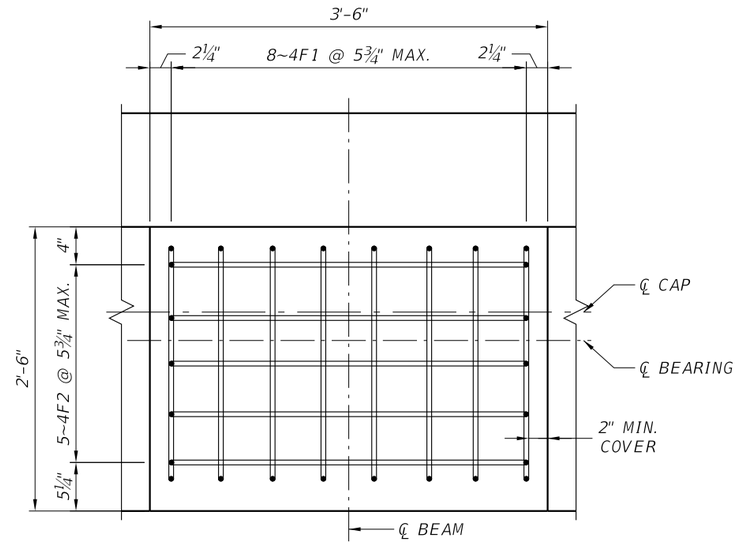


PEDESTAL PLAN

(BEAM LINE 1 SHOWN; BAR SPACING MAY BE ADJUSTED TO CLEAR THE CAP REINFORCEMENT)

TOP OF PEDESTAL ELEVATIONS				
BEAM NO.	ELEVATION (FEET)			
	A	B	C	D
1-1	43.732	43.746	43.732	43.746
1-2	43.732	43.746	43.732	43.746

A, C AT FFBW EDGE; B, D AT SPAN EDGE (LEVEL TRANSVERSELY).

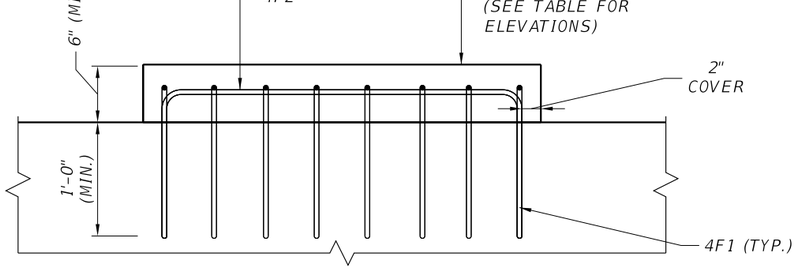

PEDESTAL ELEVATION

NOTES:

1. FOR LOCATION OF SECTIONS F-F AND G-G, SEE VIEW D-D, SHEET B4-3; SECTIONS F-F AND G-G SHOW THE LEFT CHEEK WALL, THE RIGHT CHEEK WALL IS SIMILAR (MIRRORED).
2. WELDED WIRE REINFORCEMENT (WWR) 4x4-W1.4xW1.4 IN THE CHEEK LUGS SHALL BE TIED TO THE END BENT REINFORCING STEEL.
3. CAP AND BACKWALL REINFORCEMENT IS NOT SHOWN IN SECTION F-F FOR CLARITY.
4. PEDESTALS AT THE OTHER BEAM LINES ARE SIMILAR.
5. PEDESTALS ARE CAST ON THE CAP; THE CAP TOP IS A CONSTRUCTION JOINT.
6. MODEL CHECK (REMOVE BEFORE ISSUE): BACKWALL END VERTICALS 5D1 LIE WITHIN THE CHEEK WALL 2" FROM THE 4E1 VERTICALS (STEELBRIDGEBACKWALLEB1F1VER, STEELBRIDGECHEEKEB12MV01); RECONCILE THE CAGES.
7. MODEL CHECK (REMOVE BEFORE ISSUE): BACKWALL VERTICALS 5D1 STEELBRIDGEBACKWALLEB1F1V20 AND STEELBRIDGEBACKWALLEB1F1V21 STAND ⅜" APART, CENTRE TO CENTRE (OVERLAPPING), NEAR THE RIGHT CHEEK WALL ON BOTH FACES: THE RUN AT 1'-0" FROM THE OTHER END BAR LANDS ⅜" SHORT OF ITS END BAR; RECONCILE THE LAYOUT.
8. FOR REINFORCING BAR LIST, SEE SHEET B4-12.

BRIDGE NO. _____
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE: END BENT 1 DETAILS (3 OF 3)


PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4

REF. DWG. NO.

SHEET NO. B4-4

FREECAD MODEL SHA-256 A831DEC890841953
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.5.0)

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

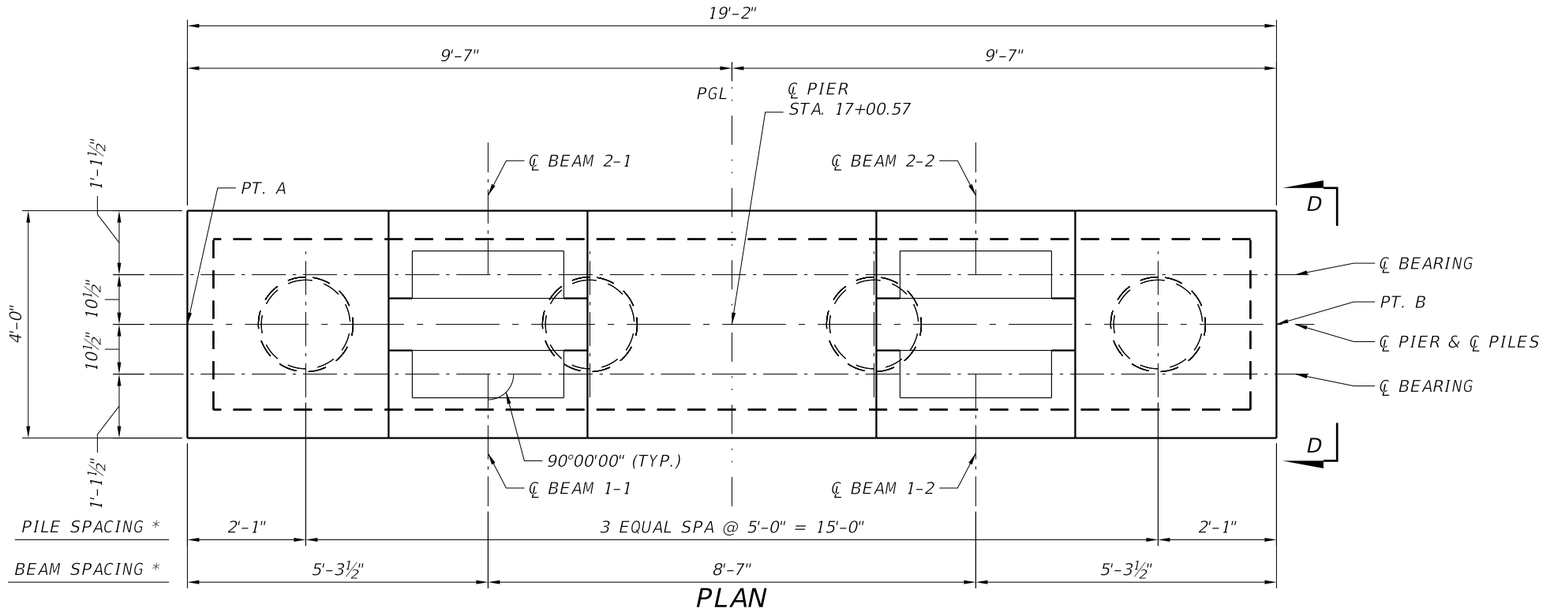

PLAN


DIRECTION OF STATIONING

TABLE OF ELEVATIONS	
POINT	ELEVATION
A	43.765
B	43.765
C	40.765
D	40.765
E	24.526
F	24.526

PILE CUTOFF ELEVATIONS		
PILE NO.	CUTOFF EL.	PGL OFFSET
1	41.8	-7'-6"
2	41.8	-2'-6"
3	41.8	2'-6"
4	41.8	7'-6"


NOTES:

1. STIRRUP SPACING IS DIMENSIONED TO BAR CENTERLINES.
2. REINFORCEMENT IS SHOWN REPRESENTATIVELY: THE FIRST AND LAST BAR OF EACH RUN ARE DRAWN.
3. FOR SECTIONS A-A, B-B AND C-C, SEE SHEET B4-6. FOR PEDESTAL DETAILS, SEE SHEET B4-7. FOR LOCATION OF VIEW D-D, SEE PLAN.
4. PIER WALL IS PROVISIONAL (3'-0" THICK); ITS REINFORCEMENT IS NOT SHOWN.
5. FOR REINFORCING BAR LIST, SEE SHEET B4-12.
6. PILE OFFSETS ARE FROM THE PGL, + TO THE RIGHT LOOKING UP-STATION. CUTOFF ELEVATIONS ARE TO THE NEAREST 0.1 FT.

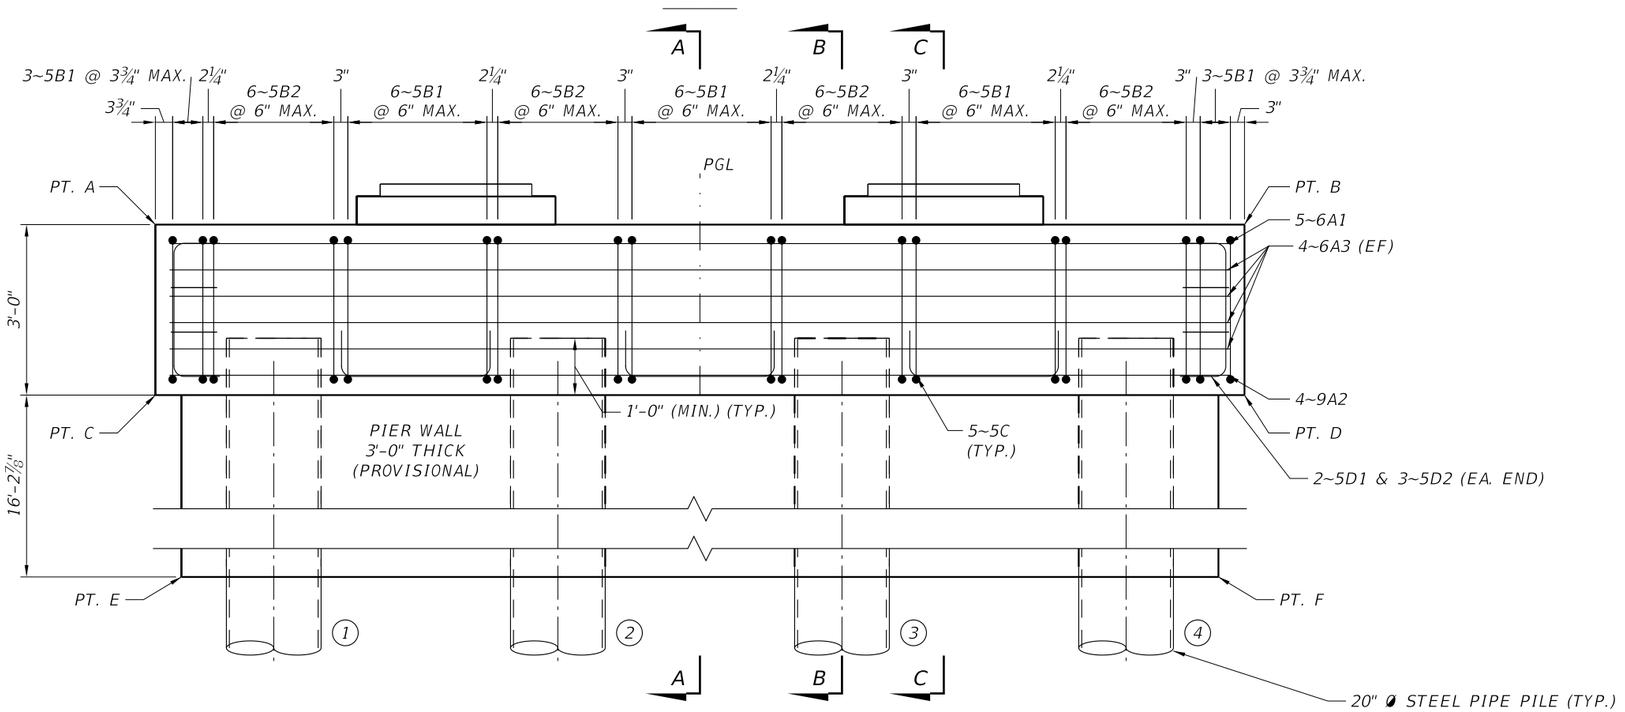

* DIMENSIONS MEASURED ALONG ℄ PIER

ELEVATION
(LOOKING AHEAD STATION)

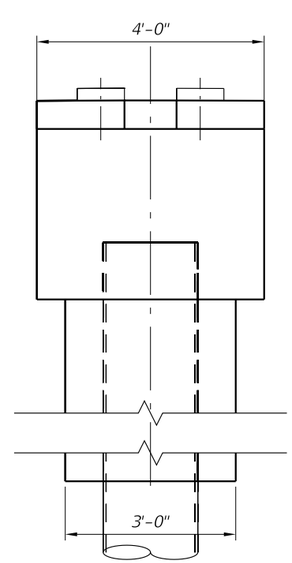

VIEW D-D
(END VIEW)

BRIDGE NO. _____
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID.

SHEET TITLE: PIER

PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE – B4


REF. DWG. NO.

SHEET NO. B4-5


FREECAD MODEL SHA-256 A831DEC890841953
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.5.0)

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.


PRELIMINARY – NOT FOR CONSTRUCTION – GENERATED FROM THE CURRENT FREECAD MODEL

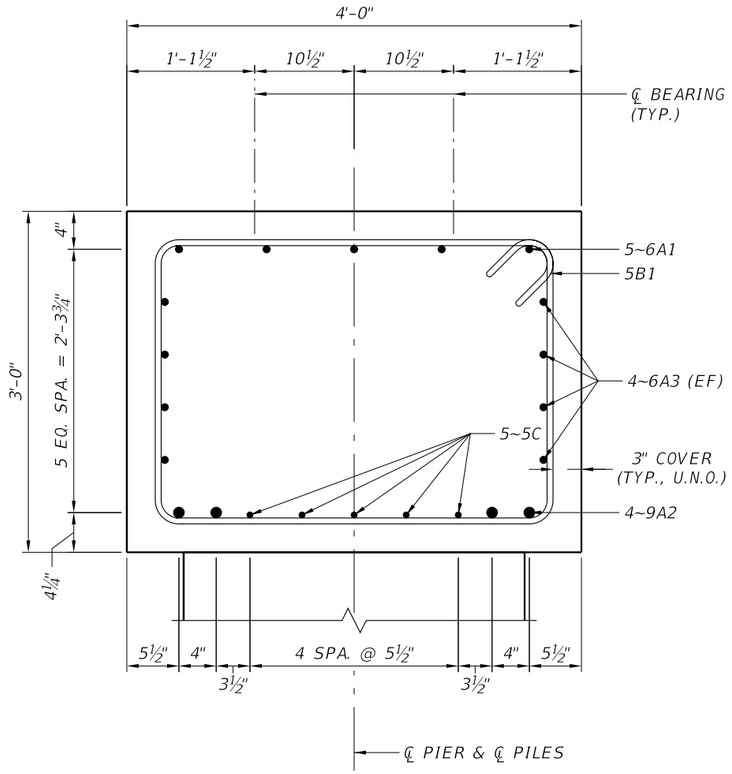

SECTION A-A
(SECTION BETWEEN PILES)

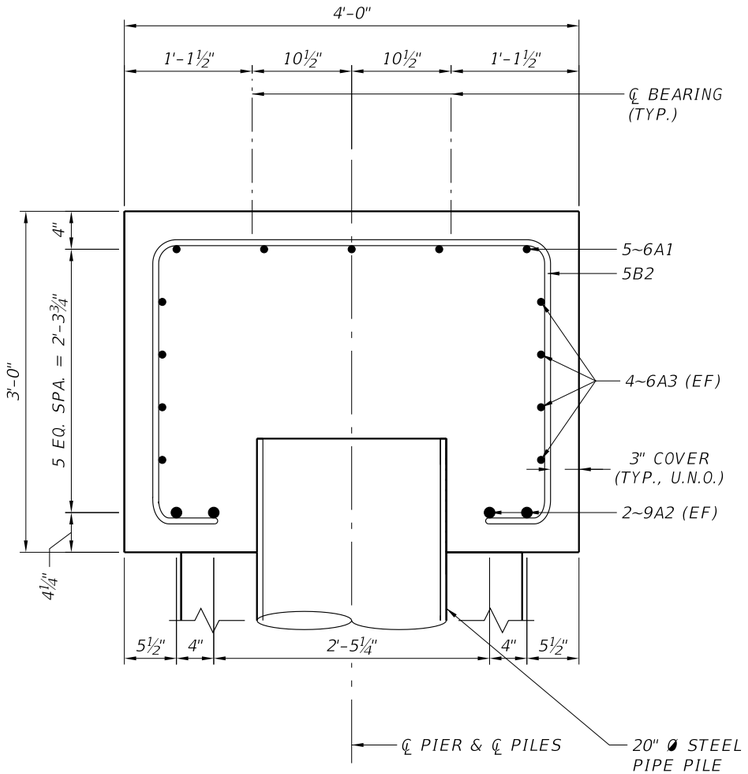

SECTION B-B
(SECTION AT PILES)

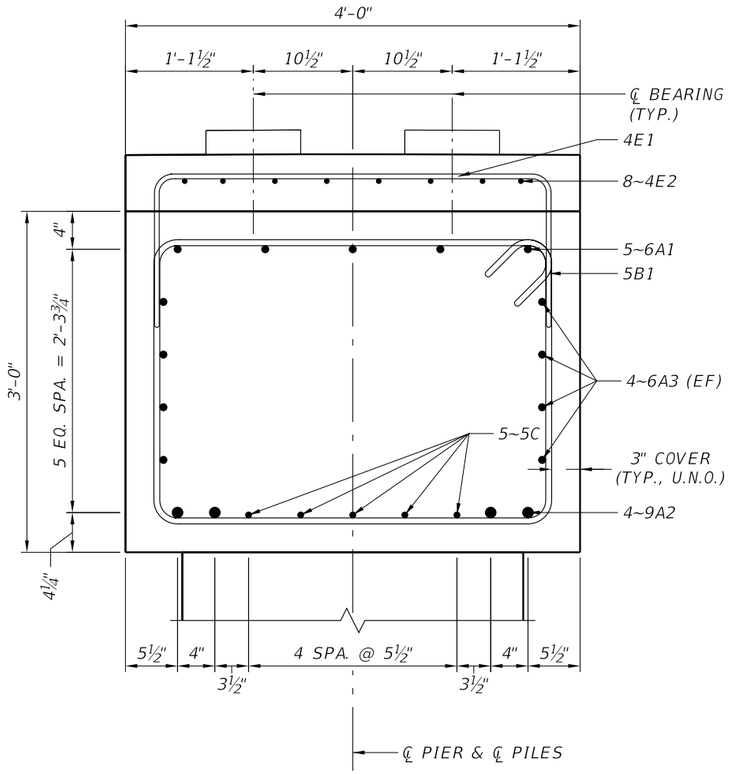

SECTION C-C
(SECTION AT CENTERLINE OF BEAMS)

NOTES:

1. FOR LOCATION OF SECTIONS, SEE SHEET B4-5.
2. ALL BARS ARE SHOWN IN SECTIONS; BARS IN THE SECTION PLANE ARE THE NEAREST BAR OF THEIR SERIES WITHIN 1'-3" BEYOND THE CUT.
3. FOR PEDESTAL DETAILS, SEE SHEET B4-7.
4. PIER WALL IS PROVISIONAL; ITS REINFORCEMENT IS NOT SHOWN.
5. FOR REINFORCING BAR LIST, SEE SHEET B4-12.

BRIDGE NO. _____
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:


STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE: PIER DETAILS (1 OF 2)
REF. DWG. NO.
PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE – B4
SHEET NO. B4-6


THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

FREECAD MODEL SHA-256 A831DEC890841953
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.5.0)

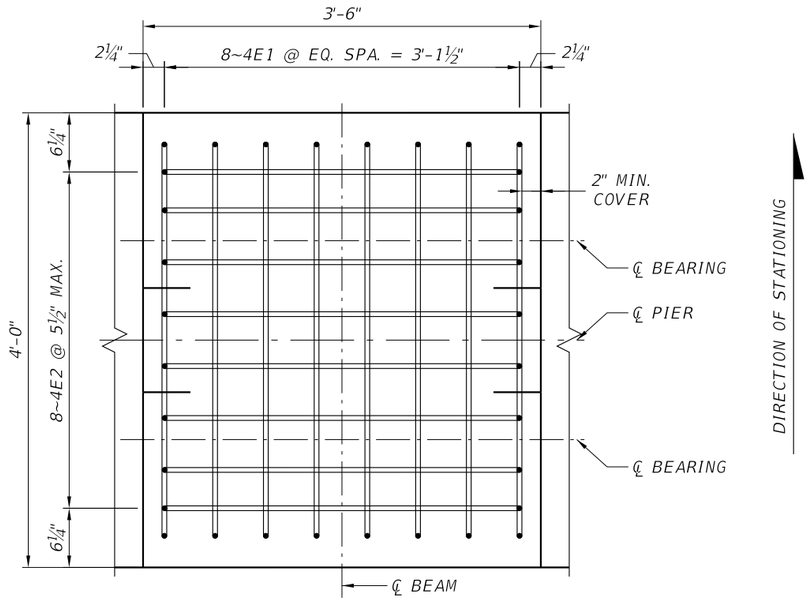

PEDESTAL PLAN

(BEAM LINE 1 SHOWN; BAR SPACING MAY BE ADJUSTED TO CLEAR THE CAP REINFORCEMENT)

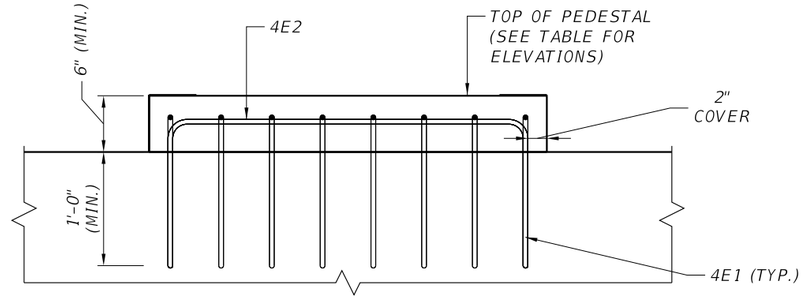

PEDESTAL ELEVATION

TOP OF PEDESTAL ELEVATIONS				
BEAM NO.	ELEVATION (FEET)			
	A	E	F	B
1-1 / 2-1	44.260	44.267	44.266	44.261
1-2 / 2-2	44.260	44.267	44.266	44.261

A AT SPAN 1 EDGE, B AT SPAN 2 EDGE,
E AND F AT THE PAD-END BREAKS.

NOTES:


1. FOR LOCATION OF THE PEDESTALS, SEE SHEET B4-5; FOR SECTIONS A-A, B-B AND C-C, SEE SHEET B4-6.
2. PEDESTALS AT THE OTHER BEAM LINES ARE SIMILAR.
3. PEDESTALS ARE CAST ON THE CAP; THE CAP TOP IS A CONSTRUCTION JOINT.
4. FOR REINFORCING BAR LIST, SEE SHEET B4-12.

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.


FREECAD MODEL SHA-256 A831DEC890841953
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.5.0)

BRIDGE NO. _____
B4 PEDESTRIAN BRIDGE

REVISIONS						ENGINEER OF RECORD:	DRAWN BY:	STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION			SHEET TITLE: PIER DETAILS (2 OF 2)	REF. DWG. NO.
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION		CHECKED BY:					
							DESIGNED BY:	ROAD NO.	COUNTY	FINANCIAL PROJECT ID	PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4	SHEET NO. B4-7
							CHECKED BY:					

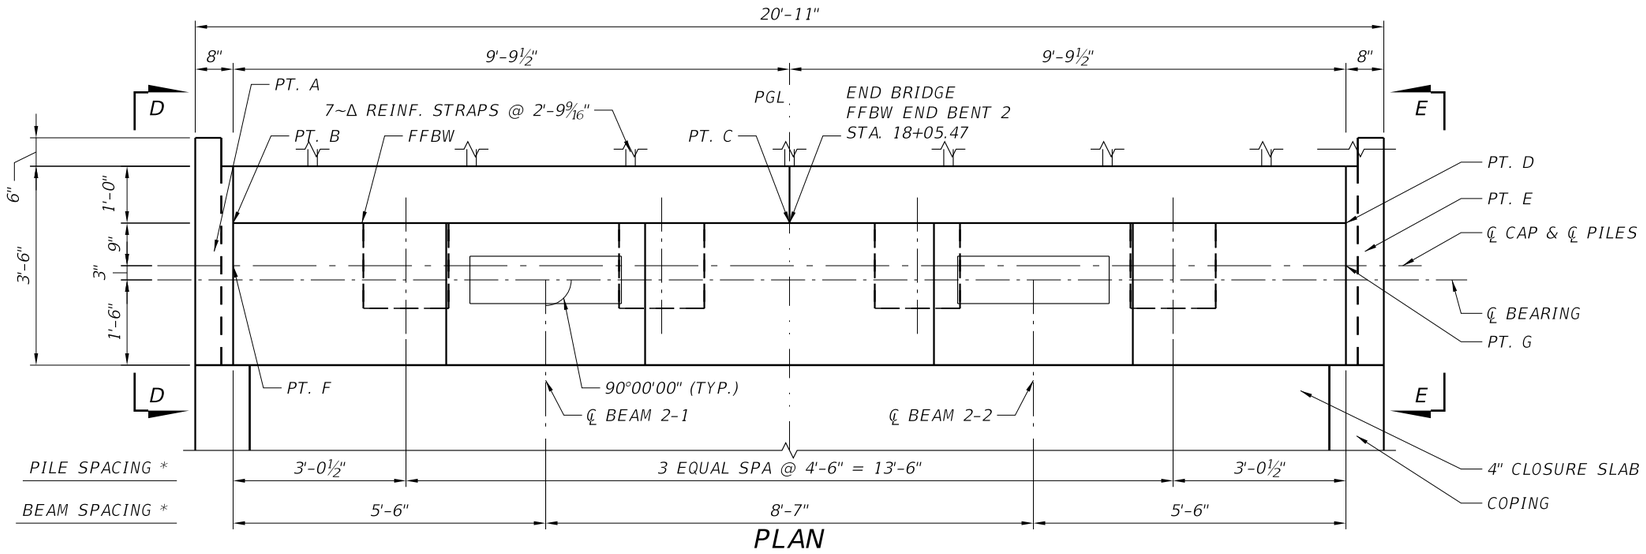

PLAN

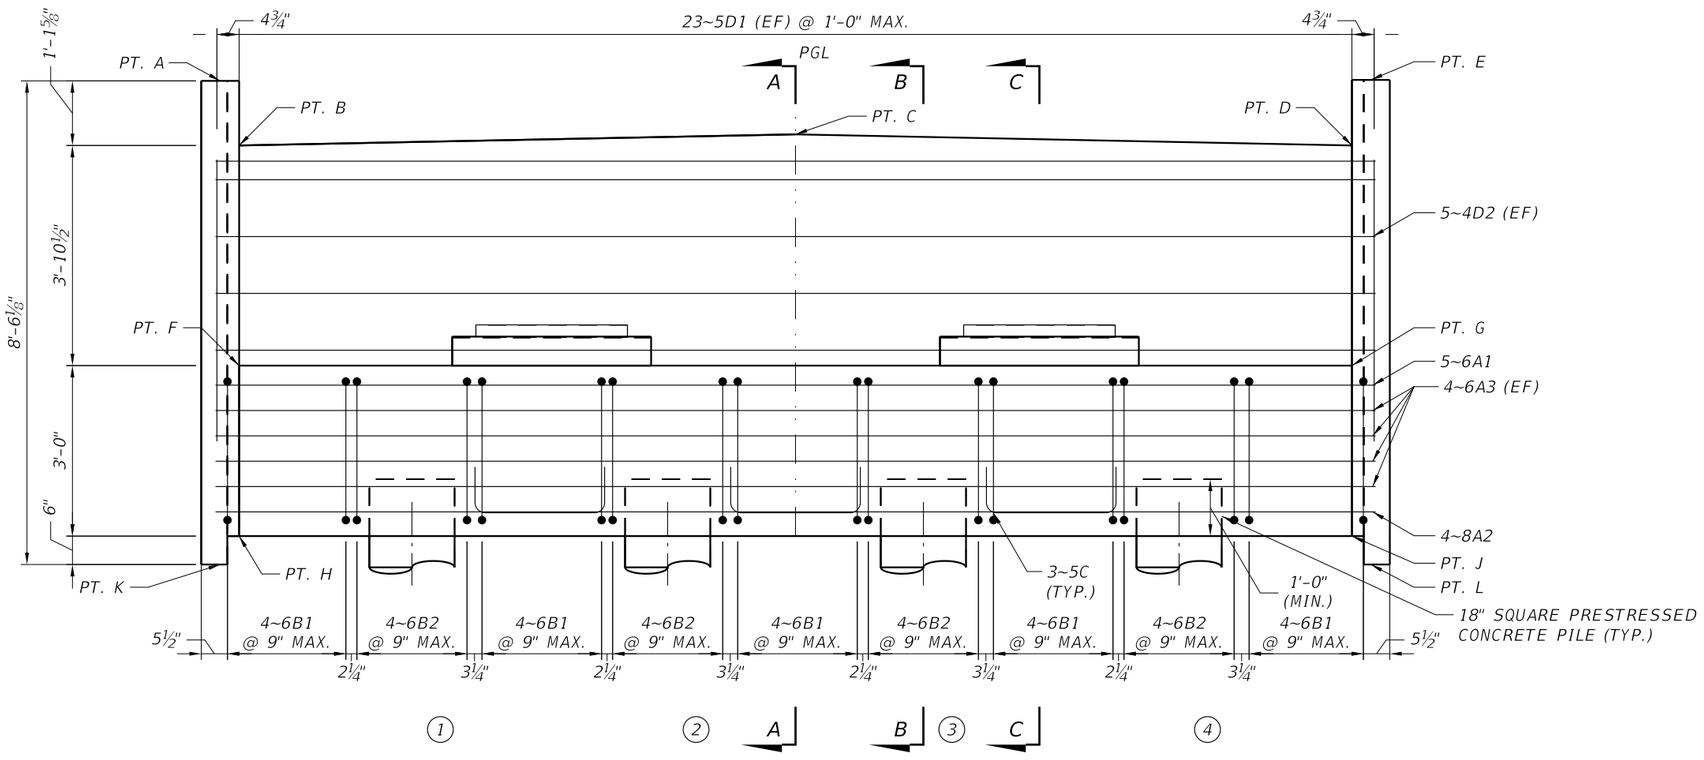

* DIMENSIONS MEASURED ALONG FFBW

ELEVATION

(LOOKING AHEAD STATION)

DIRECTION OF STATIONING

TABLE OF ELEVATIONS

POINT	ELEVATION
A	48.260
B	47.123
C	47.319
D	47.123
E	48.277
F	43.250
G	43.250
H	40.250
J	40.250
K	39.750
L	39.750

PILE CUTOFF ELEVATIONS

PILE NO.	CUTOFF EL.	PGL OFFSET
1	41.2	-6'-9"
2	41.2	-2'-3"
3	41.2	2'-3"
4	41.2	6'-9"

NOTES:

1. STIRRUP SPACING IS DIMENSIONED TO BAR CENTERLINES.
2. REINFORCEMENT IS SHOWN REPRESENTATIVELY: THE FIRST AND LAST BAR OF EACH RUN ARE DRAWN.
3. FOR SECTIONS A-A AND B-B AND DETAILS "A" AND "B", SEE SHEET B4-9. FOR SECTION C-C AND VIEWS D-D AND E-E, SEE SHEET B4-10. FOR SECTIONS F-F AND G-G AND PEDESTAL DETAILS, SEE SHEET B4-11.
4. FOR THE SOIL REINFORCEMENT (Δ) LEGEND, SEE SHEET B4-9.
5. FOR REINFORCING BAR LIST, SEE SHEET B4-12.
6. PILE OFFSETS ARE FROM THE PGL, + TO THE RIGHT LOOKING UP-STATION. CUTOFF ELEVATIONS ARE TO THE NEAREST 0.1 FT.

BRIDGE NO. _____
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE: END BENT 2


PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4

REF. DWG. NO.


SHEET NO. B4-8

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.


FREECAD MODEL SHA-256 A831DEC890841953
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.5.0)

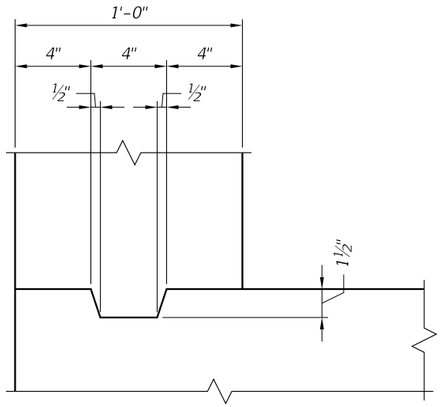


DETAIL "A"
(CONSTRUCTION JOINT)

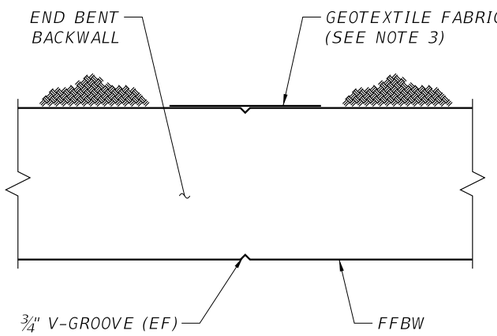

DETAIL "B"
(END BENT BACKWALL V-GROOVE)

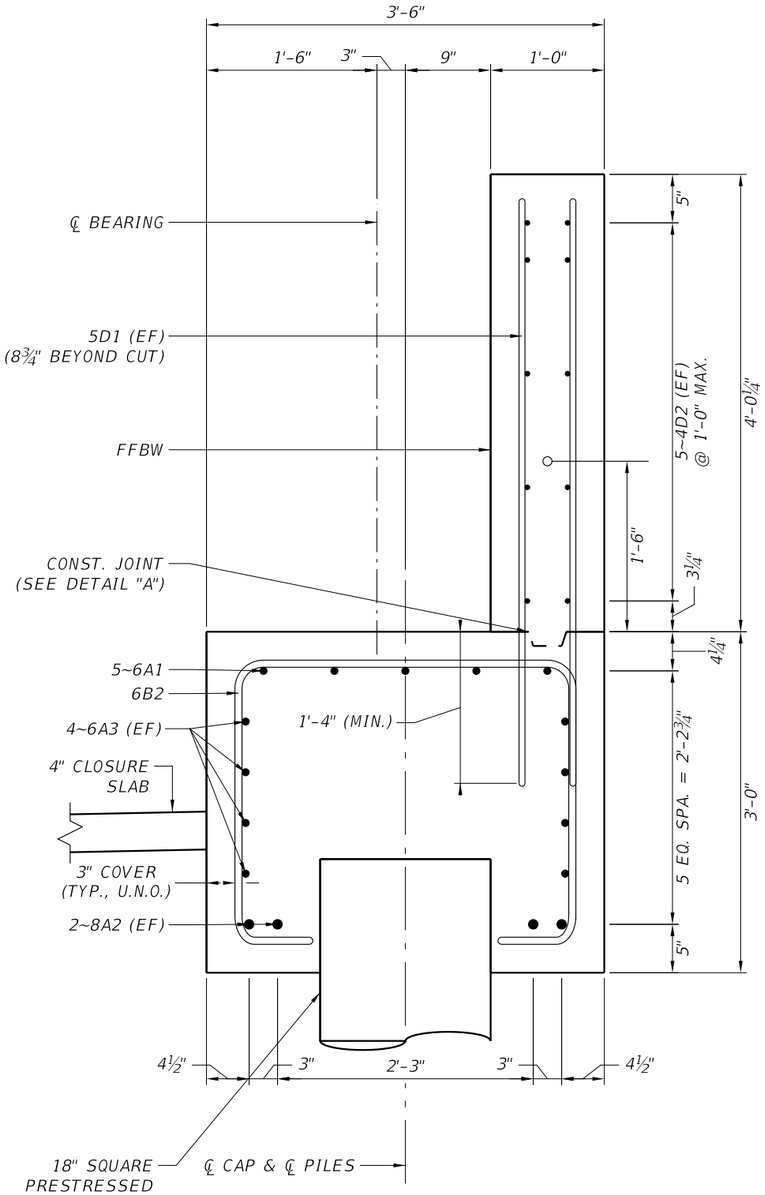

SECTION B-B
(SECTION AT PILES)

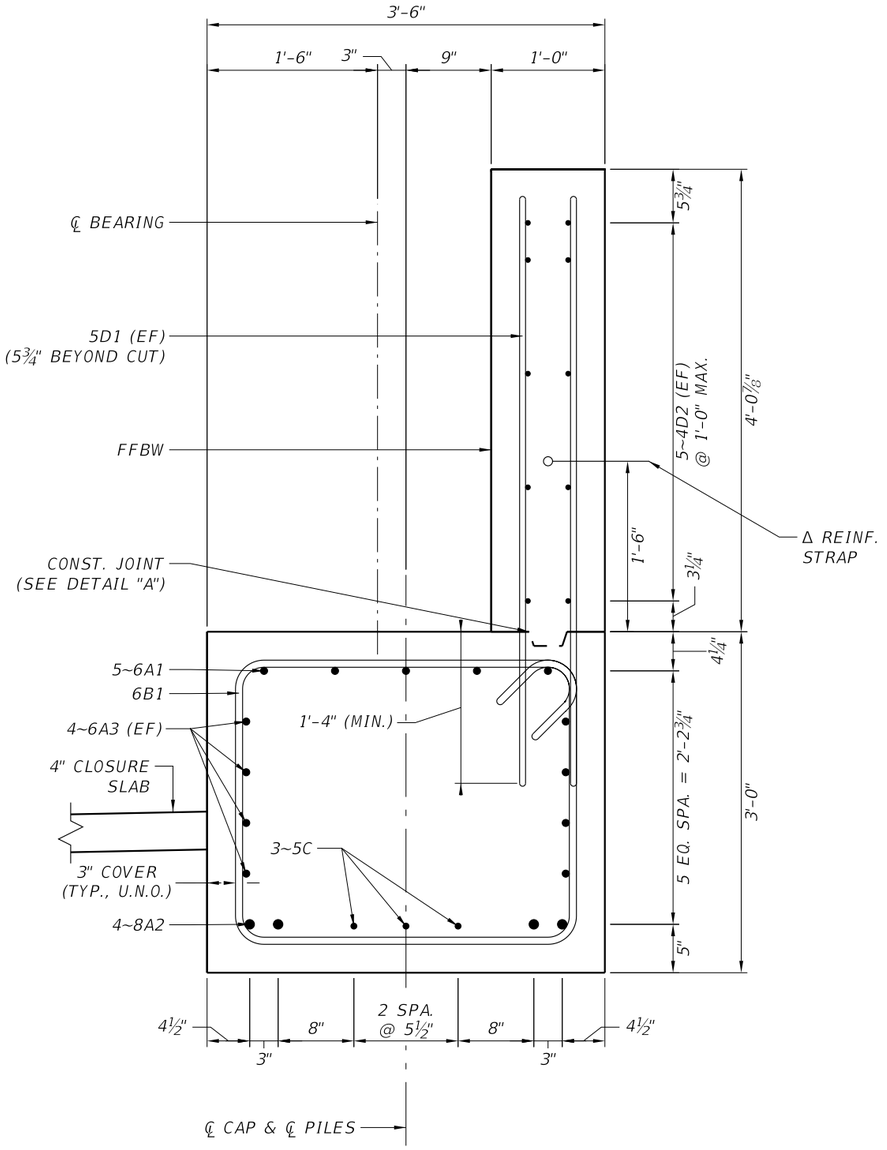

SECTION A-A
(SECTION BETWEEN PILES)

LEGEND:

Δ REINFORCING STRAPS AND ATTACHMENTS FOR THE END BENT SHALL BE DESIGNED AND FURNISHED BY THE PROPRIETARY WALL PROVIDER. THE STRAPS SHALL BE DESIGNED TO RESIST A SERVICE LOAD OF 3.09 K/FT AND A FACTORED LOAD OF 3.75 K/FT (STRENGTH I) PERPENDICULAR TO THE END BENT BACKWALL.

NOTES:


1. FOR LOCATION OF SECTIONS, SEE SHEET B4-8.
2. ALL BARS ARE SHOWN IN SECTIONS; BARS IN THE SECTION PLANE ARE THE NEAREST BAR OF THEIR SERIES WITHIN 1'-3" BEYOND THE CUT.
3. ATTACH TYPE D-5 (SPECIFICATIONS SECTION 985) GEOTEXTILE FABRIC, 1'-0" WIDE AND FULL HEIGHT OF FILL, TO THE BACK OF BACKWALL AT V-GROOVE LOCATIONS WITH AN ADHESIVE APPROVED BY THE ENGINEER.
4. MODEL CHECK (REMOVE BEFORE ISSUE): DETAILS "A" AND "B" ARE SCHEMATIC; THE CONSTRUCTION JOINT KEY AND THE V-GROOVE LOCATIONS ARE NOT IN THE CAD MODEL.
5. FOR REINFORCING BAR LIST, SEE SHEET B4-12.

BRIDGE NO. _____
B4 PEDESTRIAN BRIDGE


REVISIONS						ENGINEER OF RECORD:	DRAWN BY:	STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION			SHEET TITLE: END BENT 2 DETAILS (1 OF 3)	REF. DWG. NO.
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION		CHECKED BY:					
							DESIGNED BY:	ROAD NO.	COUNTY	FINANCIAL PROJECT ID	PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE – B4	SHEET NO. B4-9
							CHECKED BY:					

FREECAD MODEL SHA-256 A831DEC890841953
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.5.0)


THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

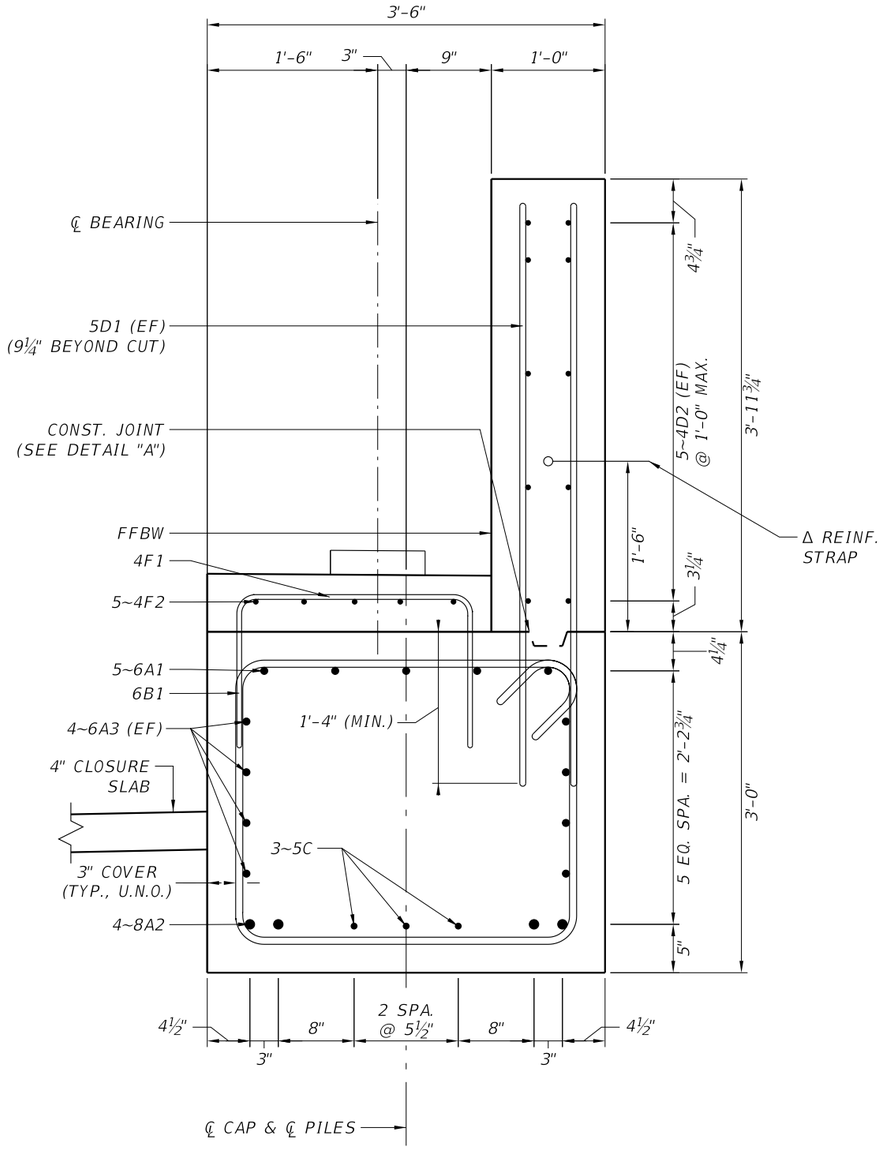

SECTION C-C
(SECTION AT CENTERLINE OF BEAM)

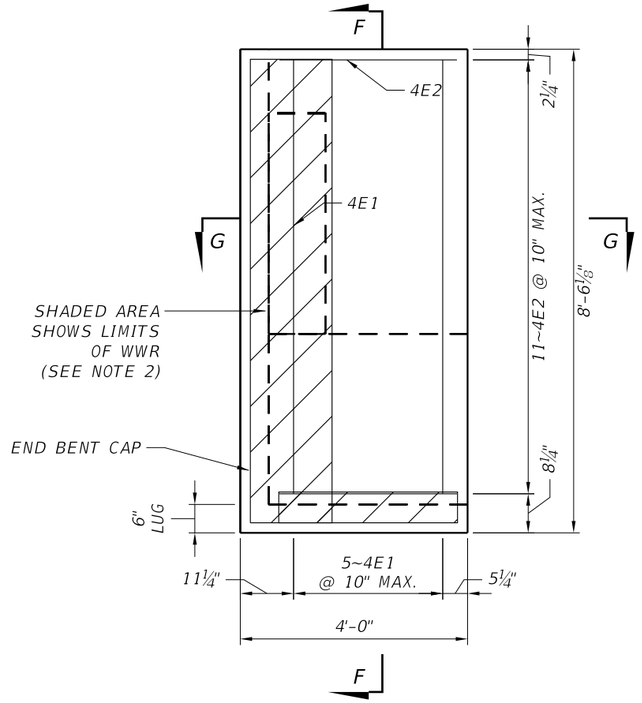

VIEW D-D
(LEFT CHEEK WALL)

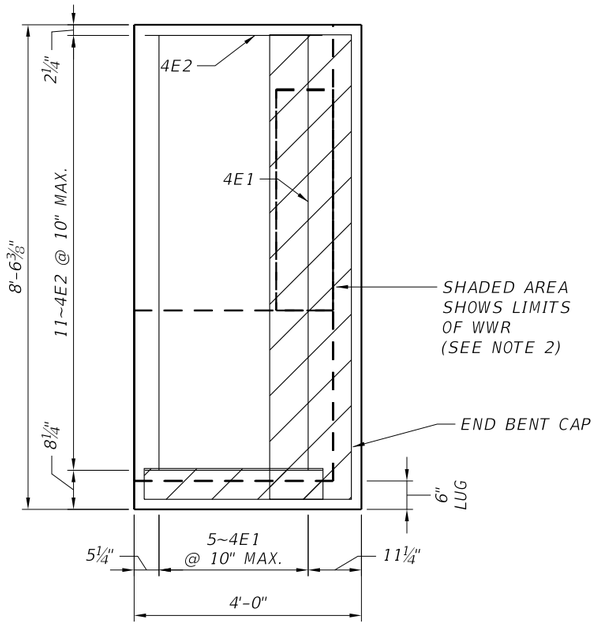

VIEW E-E
(RIGHT CHEEK WALL)

NOTES:


1. FOR LOCATION OF SECTION C-C AND VIEWS D-D AND E-E, SEE SHEET B4-8.
2. WELDED WIRE REINFORCEMENT (WWR) 4x4-W1.4xW1.4 IN THE CHEEK LUGS SHALL BE TIED TO THE END BENT REINFORCING STEEL.
3. FOR CHEEK TOP ELEVATIONS, SEE THE TABLE OF ELEVATIONS, SHEET B4-8.
4. SECTIONS F-F AND G-G ARE LOCATED IN VIEW D-D; FOR SECTIONS F-F AND G-G, SEE SHEET B4-11.
5. FOR THE Δ REINFORCING STRAP LEGEND, SEE SHEET B4-9.
6. MODEL CHECK (REMOVE BEFORE ISSUE): THE BACKWALL TOP IS LEVEL ACROSS THE WALL THICKNESS IN THE CAD MODEL (ITS SLOPE RUNS ALONG THE BENT TO THE CROWN ONLY); THE SECTIONS SHOW THE MODEL. ADD THE CROSS SLOPE TO THE MODEL.
7. FOR REINFORCING BAR LIST, SEE SHEET B4-12.

BRIDGE NO. _____
B4 PEDESTRIAN BRIDGE

REVISIONS						ENGINEER OF RECORD:	DRAWN BY:	STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION			SHEET TITLE: END BENT 2 DETAILS (2 OF 3)	REF. DWG. NO.
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION		CHECKED BY:					
							DESIGNED BY:	ROAD NO.	COUNTY	FINANCIAL PROJECT ID	PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE – B4	SHEET NO. B4-10
							CHECKED BY:					


FREECAD MODEL SHA-256 A831DEC890841953
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.5.0)

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

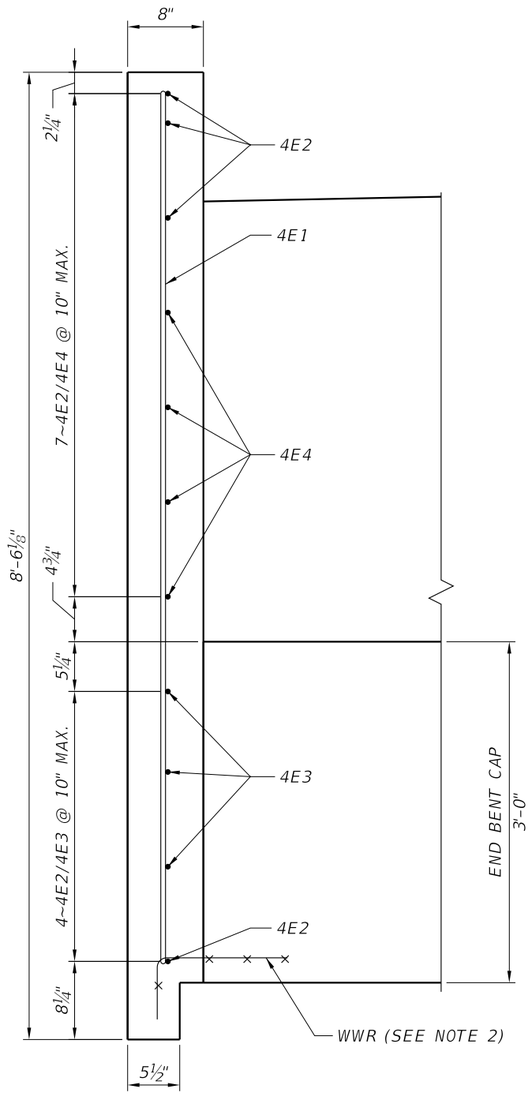


SECTION F-F

(THROUGH CHEEK WALL)

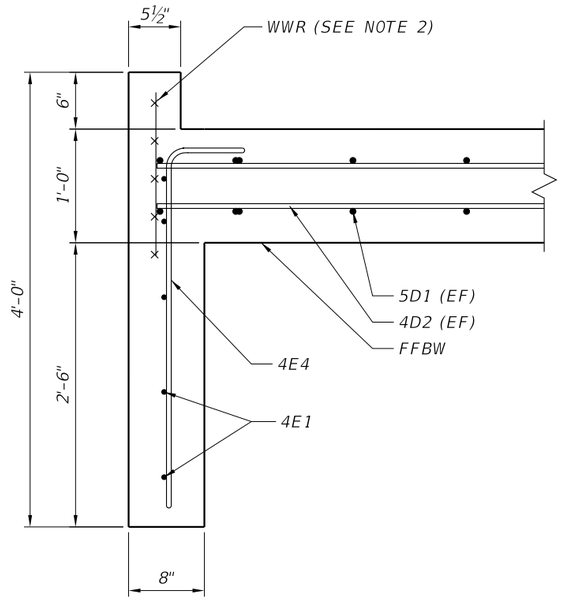


SECTION G-G

(THROUGH CHEEK WALL AND BACKWALL)

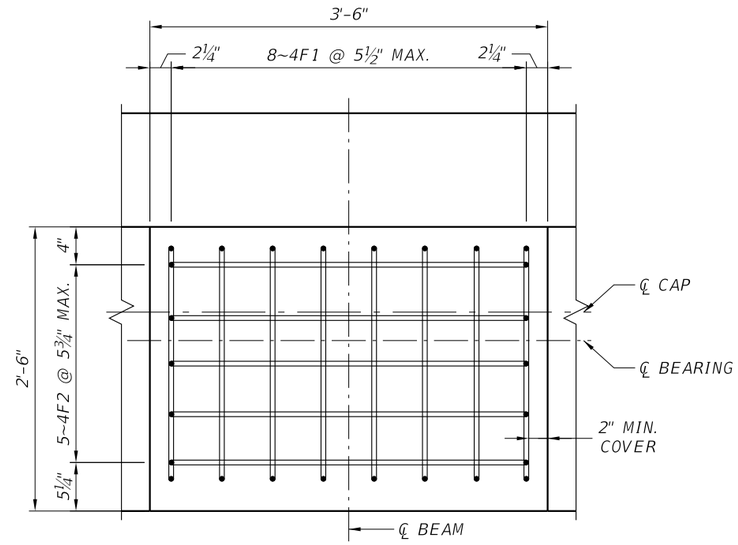

PEDESTAL PLAN

(BEAM LINE 1 SHOWN; BAR SPACING MAY BE ADJUSTED TO CLEAR THE CAP REINFORCEMENT)

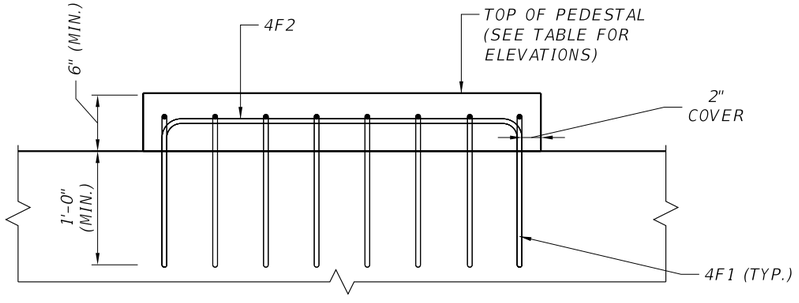

PEDESTAL ELEVATION

TOP OF PEDESTAL ELEVATIONS

BEAM NO.	ELEVATION (FEET)			
	A	B	C	D
2-1	43.743	43.760	43.743	43.760
2-2	43.743	43.760	43.743	43.760

A, C AT FFBW EDGE; B, D AT SPAN EDGE (LEVEL TRANSVERSELY).

NOTES:

1. FOR LOCATION OF SECTIONS F-F AND G-G, SEE VIEW D-D, SHEET B4-10; SECTIONS F-F AND G-G SHOW THE LEFT CHEEK WALL, THE RIGHT CHEEK WALL IS SIMILAR (MIRRORED).
2. WELDED WIRE REINFORCEMENT (WWR) 4x4-W1.4xW1.4 IN THE CHEEK LUGS SHALL BE TIED TO THE END BENT REINFORCING STEEL.
3. CAP AND BACKWALL REINFORCEMENT IS NOT SHOWN IN SECTION F-F FOR CLARITY.
4. PEDESTALS AT THE OTHER BEAM LINES ARE SIMILAR.
5. PEDESTALS ARE CAST ON THE CAP; THE CAP TOP IS A CONSTRUCTION JOINT.
6. MODEL CHECK (REMOVE BEFORE ISSUE): BACKWALL END VERTICALS 5D1 LIE WITHIN THE CHEEK WALL 1⅛" FROM THE 4E1 VERTICALS (STEELBRIDGEBACKWALLEB2F1VEL, STEELBRIDGECHEEKEB21MV04); RECONCILE THE CAGES.
7. MODEL CHECK (REMOVE BEFORE ISSUE): BACKWALL VERTICALS 5D1 STEELBRIDGEBACKWALLEB2F1V20 AND STEELBRIDGEBACKWALLEB2F1V21 STAND ⅜" APART, CENTRE TO CENTRE (OVERLAPPING), NEAR THE LEFT CHEEK WALL ON BOTH FACES: THE RUN AT 1'-0" FROM THE OTHER END BAR LANDS ⅜" SHORT OF ITS END BAR; RECONCILE THE LAYOUT.
8. FOR REINFORCING BAR LIST, SEE SHEET B4-12.

BRIDGE NO. _____
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE: END BENT 2 DETAILS (3 OF 3)

PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4

REF. DWG. NO.

SHEET NO. B4-11

FREECAD MODEL SHA-256 A831DEC890841953
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.5.0)

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

MARK		LENGTH	NO	TYP	STY		B	C	D	E	F	H	J	K	N	⌀
SIZE	DES	FT IN	BARS	BAR	A	G	FT IN	FT IN	FT IN	FT IN	FT IN	FT IN	FT IN	FT IN	NO	ANG
END BENT 1 (1 REQUIRED)																
6	A1	20-5	5	1			20-5									
8	A2	20-5	4	1			20-5									
6	A3	20-5	8	1			20-5									
6	B1	11-10	20	4	5	5	2-6	3-0								
6	B2	9-4	16	11	4	4	3-0	2-6	2-6							
5	C	3-9	9	18	3	3	2-4									
5	D1	4-11 TO 5-2	46	1			4-11 TO 5-2									
4	D2	20-5	10	1			20-5									
4	E1	7-8	10	1			7-8									
4	E2	3-2	6	1			3-2									
4	E3	3-11	6	18	3	3	2-10									
4	E4	3-8	10	17	3		3-1¾									
4	F1	4-6	16	11			2-0¾	1-4	1-4							
4	F2	5-6	10	11			3-2	1-3½	1-3½							
END BENT 2 (1 REQUIRED)																
6	A1	20-5	5	1			20-5									
8	A2	20-5	4	1			20-5									
6	A3	20-5	8	1			20-5									
6	B1	11-10	20	4	5	5	2-6	3-0								
6	B2	9-4	16	11	4	4	3-0	2-6	2-6							
5	C	3-9	9	18	3	3	2-4									
5	D1	4-11 TO 5-2	46	1			4-11 TO 5-2									
4	D2	20-5	10	1			20-5									
4	E1	7-8	10	1			7-8									
4	E2	3-2	8	1			3-2									
4	E3	3-11	6	18	3	3	2-10									
4	E4	3-8	8	17	3		3-1¾									
4	F1	4-6	16	11			2-0¾	1-4	1-4							
4	F2	5-6	10	11			3-2	1-3½	1-3½							

MARK		LENGTH	NO	TYP	STY		B	C	D	E	F	H	J	K	N	⌀
SIZE	DES	FT IN	BARS	BAR	A	G	FT IN	FT IN	FT IN	FT IN	FT IN	FT IN	FT IN	FT IN	NO	ANG
PIER (1 REQUIRED)																
6	A1	18-8	5	1			18-8									
9	A2	18-8	4	1			18-8									
6	A3	18-8	8	1			18-8									
5	B1	12-8	24	4	5	5	2-6	3-6								
5	B2	9-8	24	11	4	4	3-6	2-6	2-6							
5	C	4-1	15	18	3	3	2-8									
5	D1	4-10	4	18	3	3	3-4¾									
5	D2	3-10	6	18	3	3	2-4¾									
4	E1	5-11	16	11			3-5¾	1-4	1-4							
4	E2	5-6	16	11			3-2	1-3½	1-3½							

NOTES:

1. TYP BAR AND STY ARE THE BAR TYPE AND HOOK STYLE OF STANDARD PLANS INDEX 415-001 (FY 2026-27): TYPE 1 STRAIGHT (B = LENGTH); TYPES 17 AND 18 STRAIGHT BARS WITH A STANDARD 90° HOOK (STYLE 3) AT ONE OR BOTH ENDS (B = LENGTH OUT-TO-OUT); TYPE 11 U-BAR (B = BASE, C AND D = LEGS); TYPE 4 CLOSED STIRRUP (B = HEIGHT, C = WIDTH); STYLES 4 AND 5 = 90° AND 135° STIRRUP HOOKS.
2. FIELD BEND OPEN STIRRUP HOOKS AS REQUIRED TO CLEAR PILE HEAD LOCATION.
3. LENGTHS ARE THE MODEL CENTERLINE LENGTHS ROUNDED TO THE NEAREST INCH; BEND DIMENSIONS ARE OUT-TO-OUT (SDM 4.3.10.C).
4. VARYING LENGTHS: END BENT 1 5D1: 10 @ 4'-11", 16 @ 5'-0", 16 @ 5'-1", 4 @ 5'-2". END BENT 2 5D1: 10 @ 4'-11", 16 @ 5'-0", 16 @ 5'-1", 4 @ 5'-2".
5. PILES AND THE CHEEK LUG WELDED WIRE REINFORCEMENT ARE NOT INCLUDED IN THIS LIST.

NOTE:
FOR BAR BENDING DETAILS, REFER TO FDOT STANDARD PLANS INDEX 415-001.

BRIDGE NO. _____
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE: REINFORCING BAR LIST

REF. DWG. NO.

PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4

SHEET NO. B4-12

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

FREECAD MODEL SHA-256 A831DEC890841953
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.5.0)