
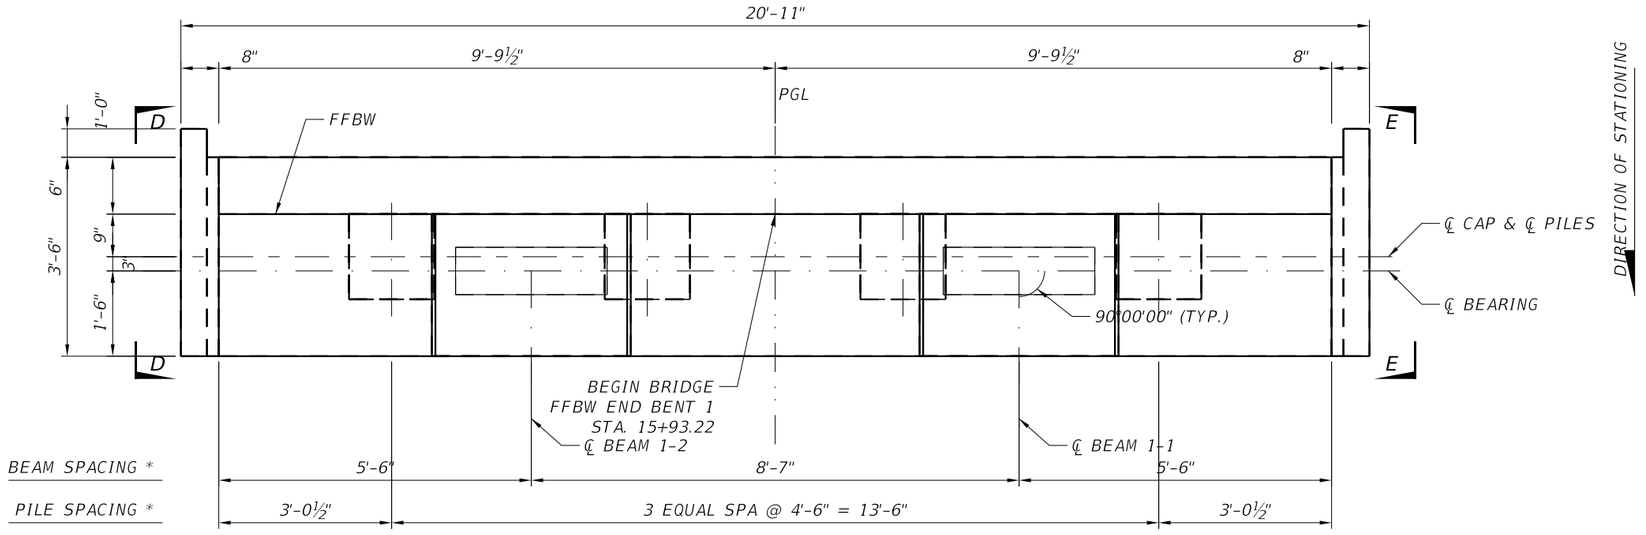


PLAN

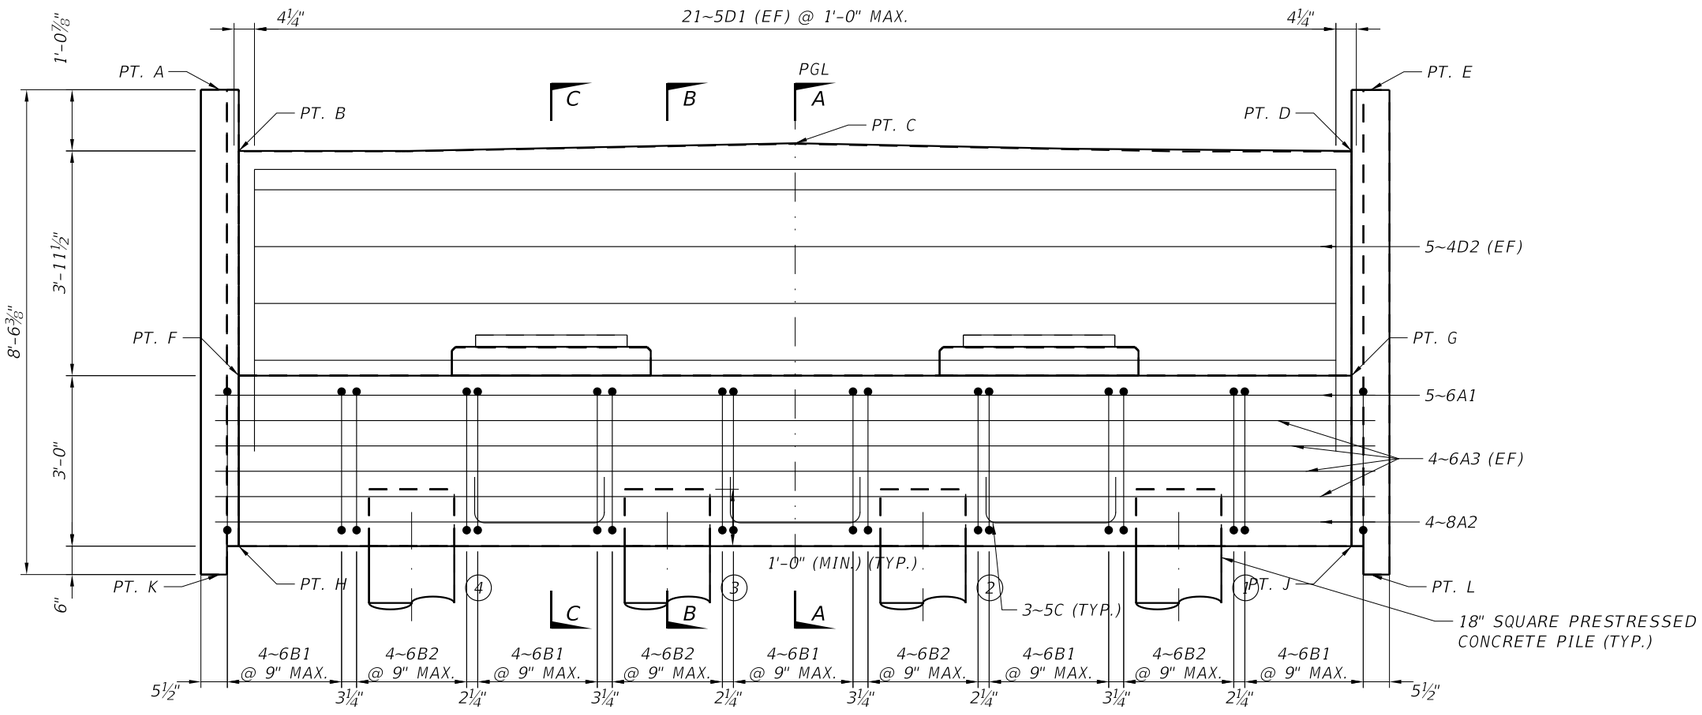

* DIMENSIONS MEASURED ALONG FFBW

ELEVATION

(LOOKING BACK STATION)

TABLE OF ELEVATIONS	
POINT	ELEVATION
A	48.269
B	47.192
C	47.328
D	47.192
E	48.265
F	43.238
G	43.238
H	40.238
J	40.238
K	39.738
L	39.738

PILE CUTOFF ELEVATIONS		
PILE NO.	CUTOFF EL.	PGL OFFSET
1	41.2	-6'-9"
2	41.2	-2'-3"
3	41.2	2'-3"
4	41.2	6'-9"

NOTES:

1. STIRRUP SPACING IS DIMENSIONED TO BAR CENTERLINES.
2. REINFORCEMENT IS SHOWN REPRESENTATIVELY: THE FIRST AND LAST BAR OF EACH RUN ARE DRAWN.
3. FOR SECTIONS A-A, B-B AND C-C, SEE SHEET B4-2. FOR VIEWS D-D AND E-E AND PEDESTAL DETAILS, SEE SHEET B4-3.
4. THE SOIL REINFORCEMENT ATTACHED TO THE BACKWALL SHALL BE DESIGNED BY A SPECIALTY ENGINEER FOR A SERVICE LOAD OF ___ K/FT AND A FACTORED LOAD OF ___ K/FT USING THE DESIGN CRITERIA FOR PERMANENT MSE WALLS. COST OF FURNISHING AND INSTALLING THE SOIL REINFORCEMENT IS CONSIDERED INCIDENTAL TO THE COST OF THE END BENT.
5. FOR REINFORCING BAR LIST, SEE SHEET B4-9.
6. PILE OFFSETS ARE FROM THE PGL, + TO THE RIGHT LOOKING UP-STATION. CUTOFF ELEVATIONS ARE TO THE NEAREST 0.1 FT.
7. MODEL CHECK (REMOVE BEFORE ISSUE): BACKWALL TOP AT CAP END END BENT 1 IS 47.192 IN THE CAD MODEL AND 47.132 IN THE SELECTED GEOMETRY CAD TABLES; RECONCILE BEFORE ISSUE.

BRIDGE NO. _____
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE: END BENT 1


REF. DWG. NO.

PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4


SHEET NO. B4-1

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.


FREECAD MODEL SHA-256 2D3B6AF8FF550D4B
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.0.0)

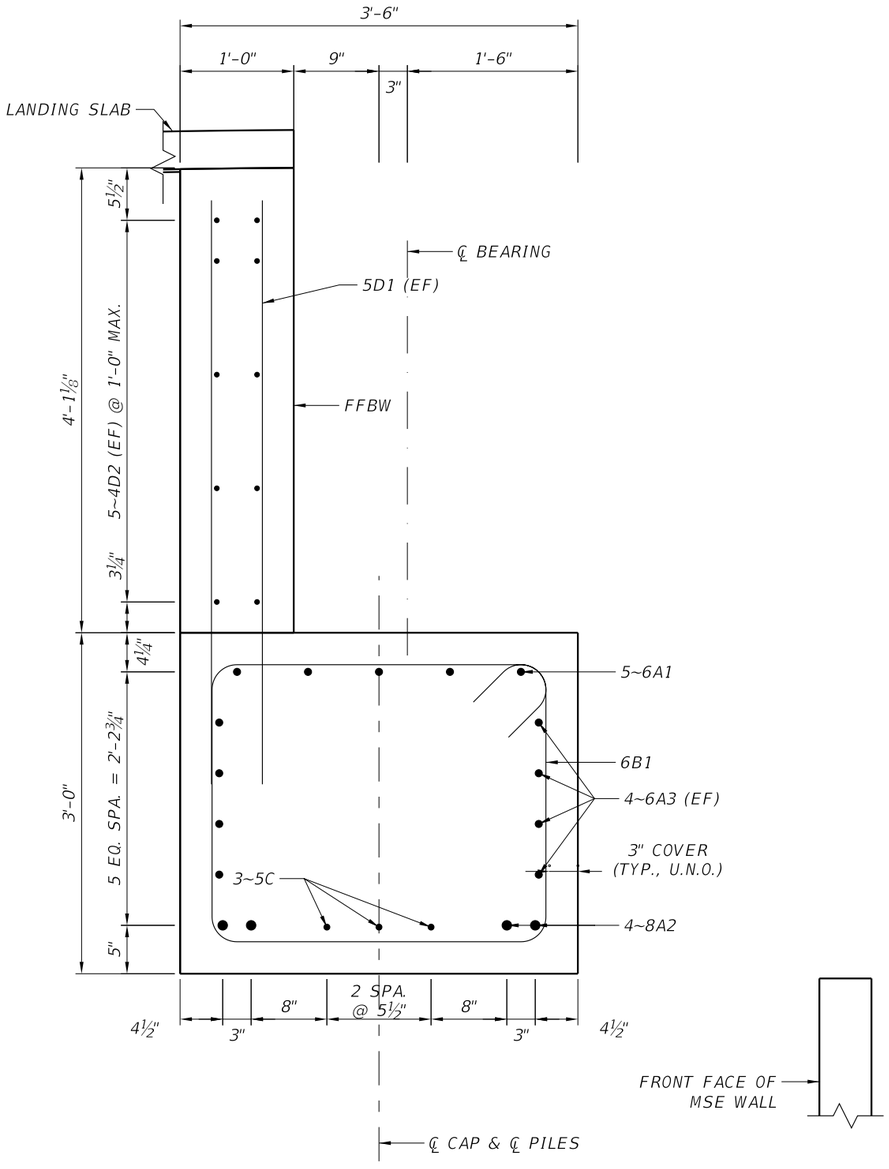


SECTION A-A
(SECTION BETWEEN PILES)

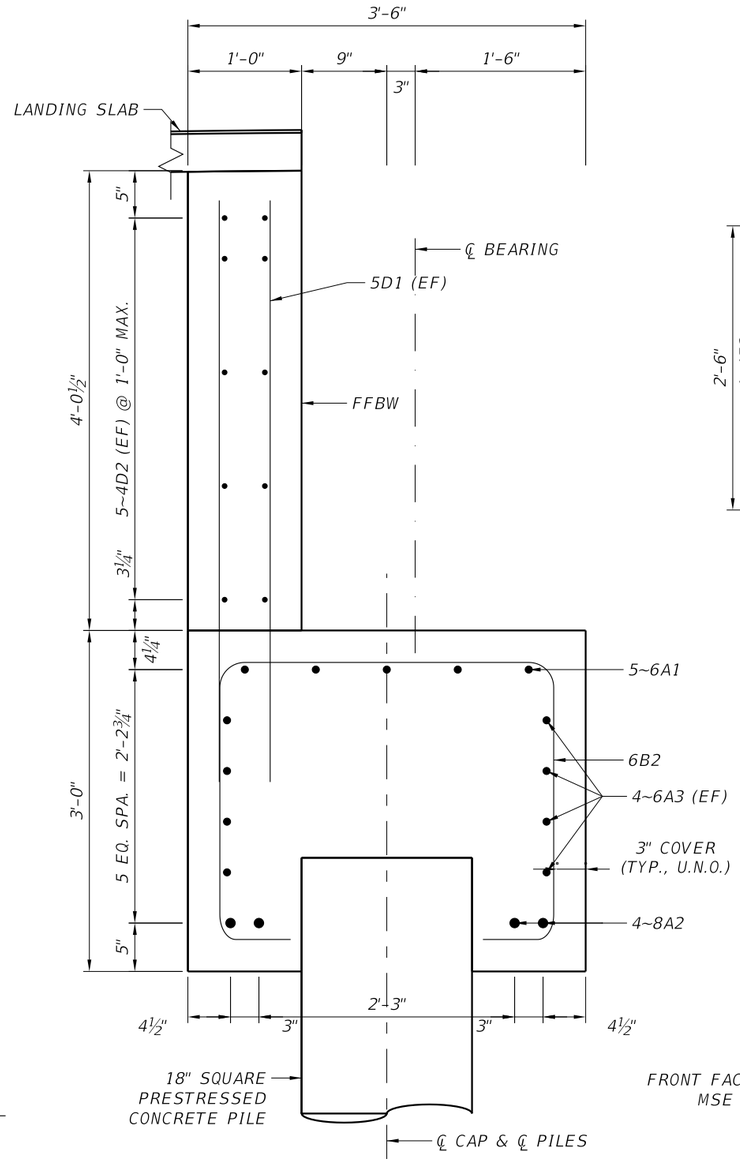


SECTION B-B
(SECTION AT PILES)

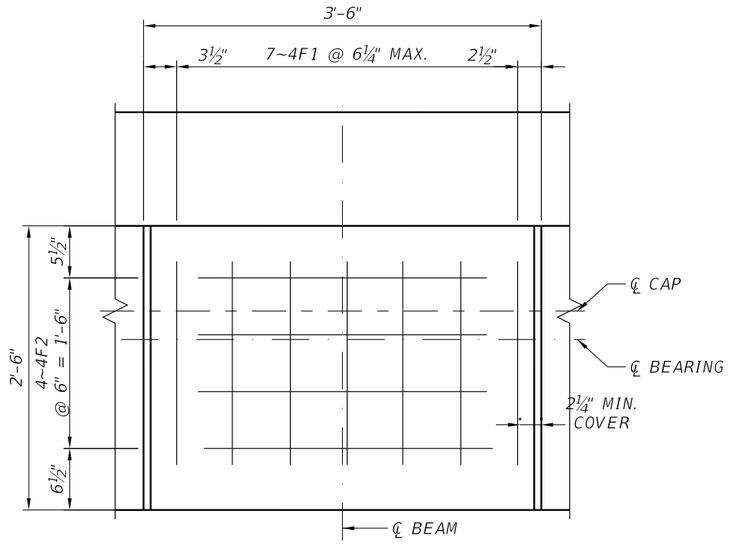

PEDESTAL PLAN
(BEAM LINE 1 SHOWN. PEDESTAL BAR SPACING MAY BE SLIGHTLY ADJUSTED TO CLEAR CONFLICTS WITH MAIN CAP REINFORCEMENT)

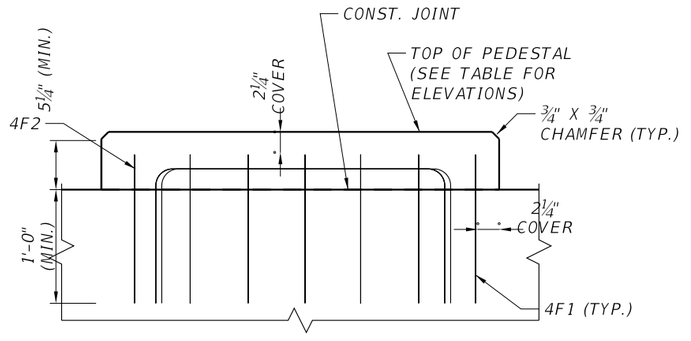

PEDESTAL ELEVATION

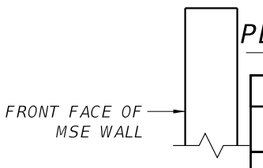

TOP OF PEDESTAL ELEVATIONS				
BEAM NO.	ELEVATION (FEET)			
	A	B	C	D
1-1	43.732	43.746	43.732	43.746
1-2	43.732	43.746	43.732	43.746

A, C AT FFBW EDGE; B, D AT SPAN EDGE (LEVEL TRANSVERSELY).

NOTES:

1. FOR LOCATION OF SECTIONS, SEE SHEET B4-1.
2. ALL BARS ARE SHOWN IN SECTIONS; BARS IN THE SECTION PLANE ARE THE NEAREST BAR OF THEIR SERIES WITHIN 1'-3" BEYOND THE CUT.
3. PEDESTALS AT THE OTHER BEAM LINES ARE SIMILAR: 4F3 IN PLACE OF 4F2 AT BEAM LINE 2.
4. PEDESTALS ARE CAST ON THE CAP; THE CAP TOP IS A CONSTRUCTION JOINT.
5. FOR REINFORCING BAR LIST, SEE SHEET B4-9.

BRIDGE NO. _____
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:


STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID


SHEET TITLE: END BENT 1 DETAILS (1 OF 2)
PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4
REF. DWG. NO.
SHEET NO. B4-2

FREECAD MODEL SHA-256 2D3B6AF8FF550D4B
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.0.0)


THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

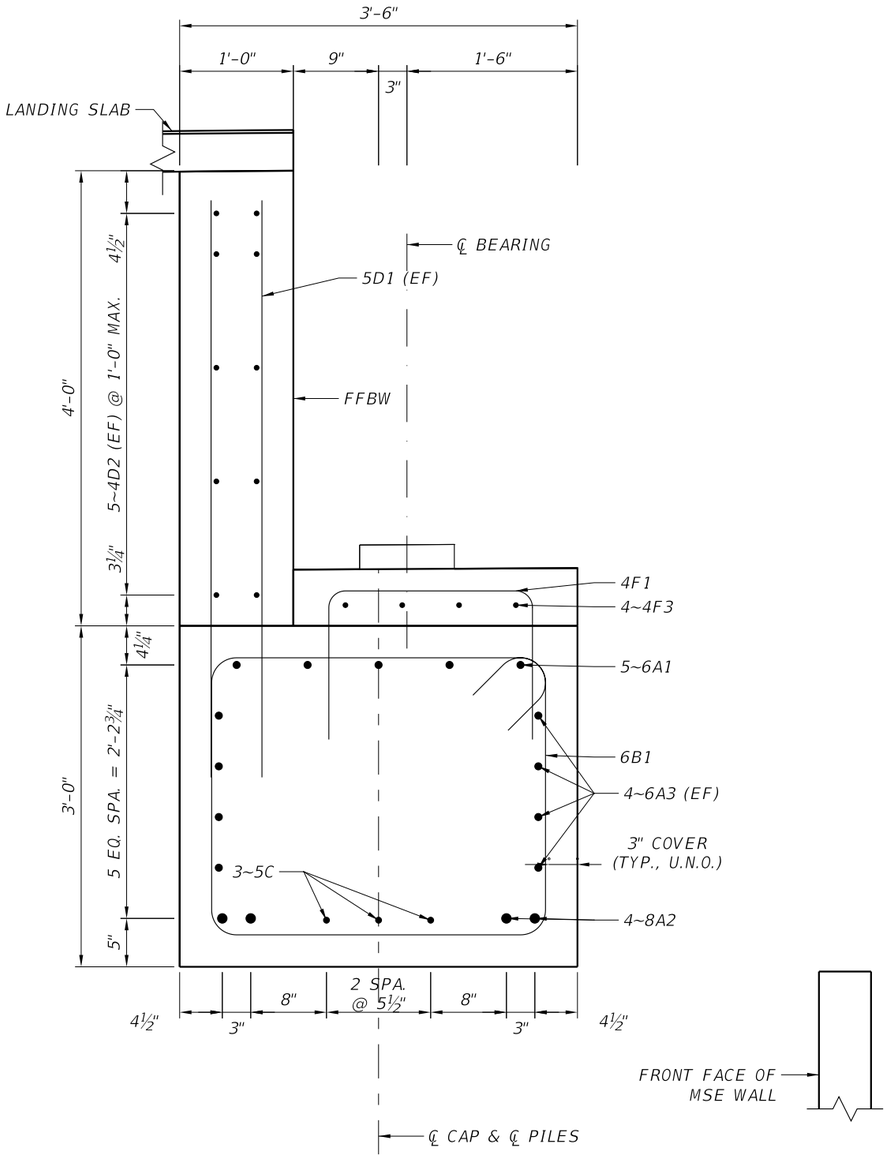

SECTION C-C
(SECTION AT CENTERLINE OF BEAM)

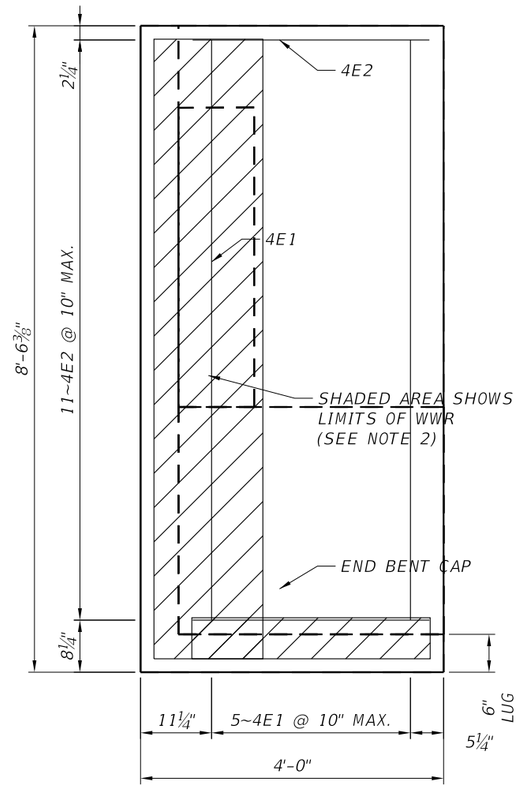

VIEW D-D
(LEFT CHEEK WALL)

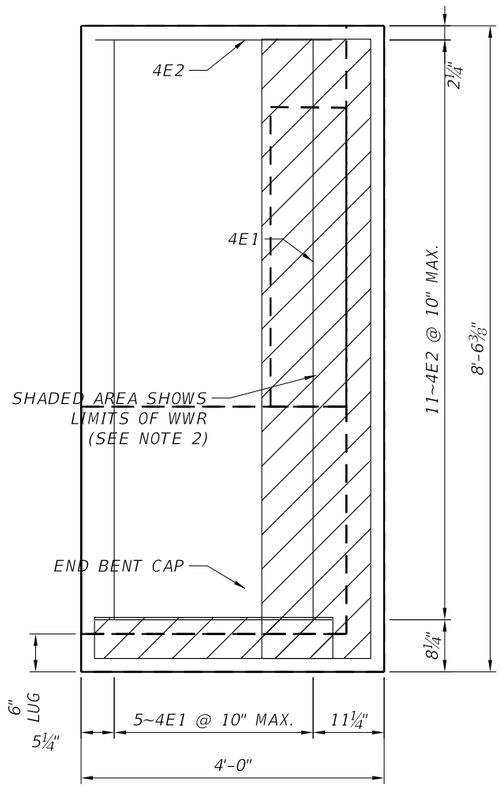

VIEW E-E
(RIGHT CHEEK WALL)

NOTES:

1. FOR LOCATION OF SECTION C–C AND VIEWS D–D AND E–E, SEE SHEET B4–1.
2. WELDED WIRE REINFORCEMENT (WWR) 4x4–W1.4xW1.4 IN THE CHEEK LUGS SHALL BE TIED TO THE END BENT REINFORCING STEEL.
3. FOR CHEEK TOP ELEVATIONS, SEE THE TABLE OF ELEVATIONS, SHEET B4–1.
4. FOR REINFORCING BAR LIST, SEE SHEET B4–9.

BRIDGE NO. _____
B4 PEDESTRIAN BRIDGE

REVISIONS						ENGINEER OF RECORD:	DRAWN BY:	STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION			SHEET TITLE: END BENT 1 DETAILS (2 OF 2)	REF. DWG. NO.
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION		CHECKED BY:					
							DESIGNED BY:	ROAD NO.	COUNTY	FINANCIAL PROJECT ID	PROJECT NAME: D2 I–95 PEDESTRIAN BRIDGE – B4	SHEET NO. B4-3
							CHECKED BY:					

FREECAD MODEL SHA-256 2D3B6AF8FF550D4B
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.0.0)

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

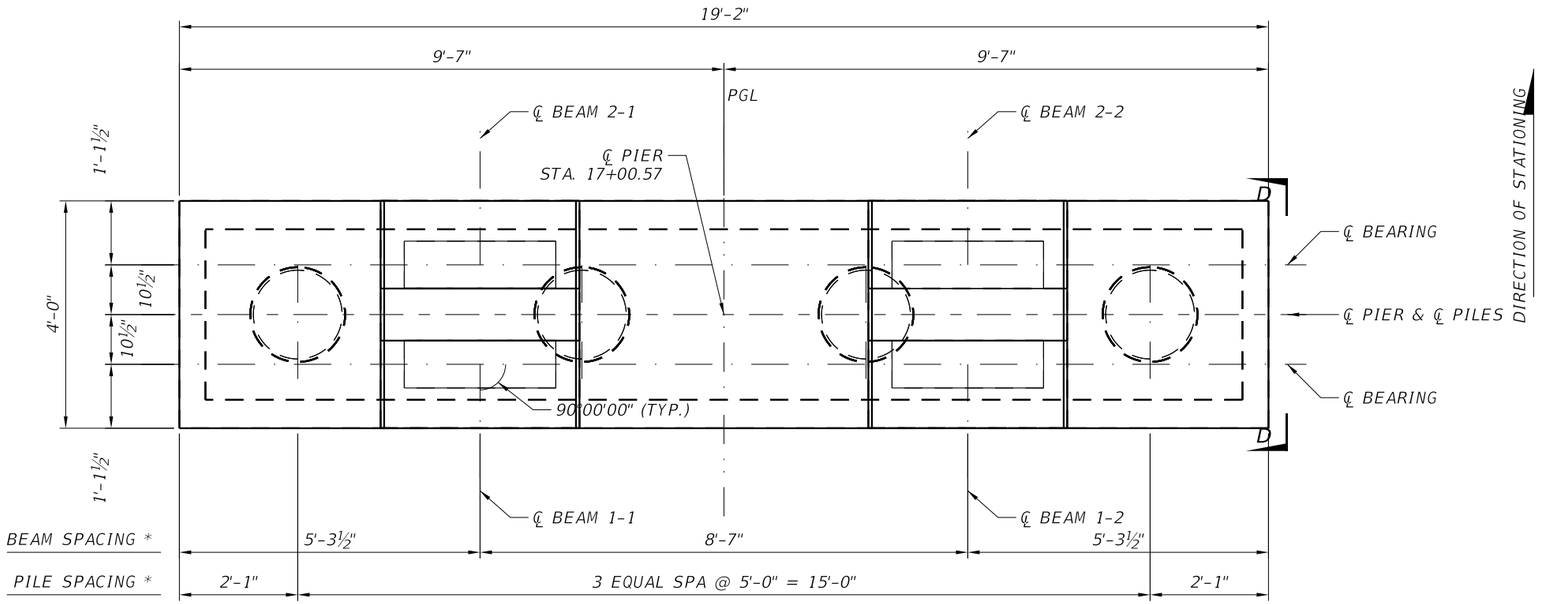



TABLE OF ELEVATIONS	
POINT	ELEVATION
A	43.765
B	43.765
C	40.765
D	40.765
E	24.526
F	24.526

PILE CUTOFF ELEVATIONS		
PILE NO.	CUTOFF EL.	PGL OFFSET
1	41.8	-7'-6"
2	41.8	-2'-6"
3	41.8	2'-6"
4	41.8	7'-6"

NOTES:

1. STIRRUP SPACING IS DIMENSIONED TO BAR CENTERLINES.
2. REINFORCEMENT IS SHOWN REPRESENTATIVELY: THE FIRST AND LAST BAR OF EACH RUN ARE DRAWN.
3. FOR SECTIONS A-A, B-B AND C-C AND PEDESTAL DETAILS, SEE SHEET B4-5. FOR LOCATION OF VIEW D-D, SEE PLAN.
4. PIER WALL IS PROVISIONAL (3'-0" THICK); ITS REINFORCEMENT IS NOT SHOWN.
5. FOR REINFORCING BAR LIST, SEE SHEET B4-9.
6. PILE OFFSETS ARE FROM THE PGL, + TO THE RIGHT LOOKING UP-STATION. CUTOFF ELEVATIONS ARE TO THE NEAREST 0.1 FT.


PLAN

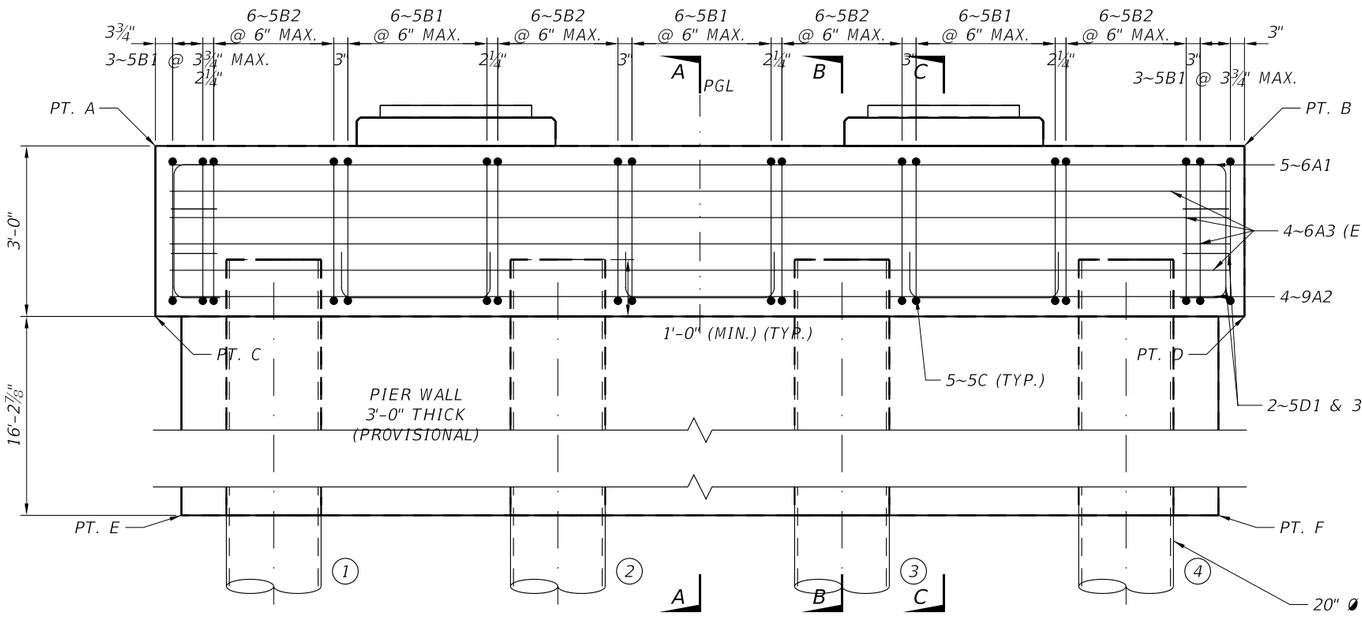

* DIMENSIONS MEASURED ALONG ℄ PIER

ELEVATION

(LOOKING AHEAD STATION)

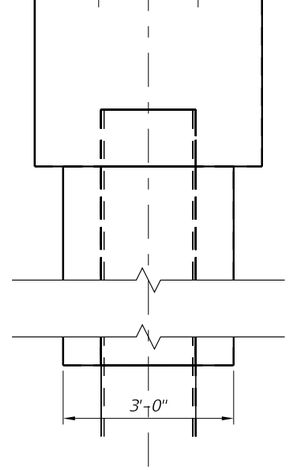

VIEW D-D

(END VIEW)

BRIDGE NO. _____
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE: PIER


REF. DWG. NO.

PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4

SHEET NO. B4-4


FREECAD MODEL SHA-256 2D3B6AF8FF550D4B
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.0.0)

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

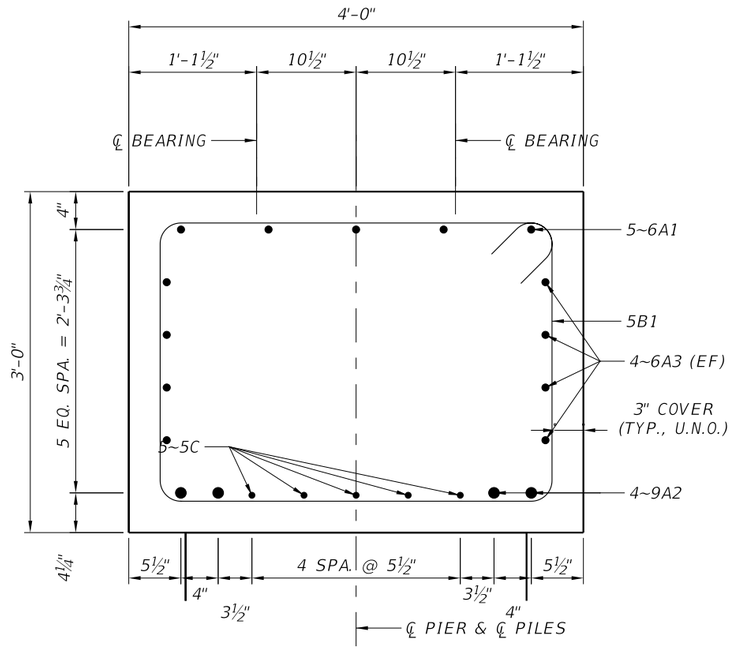


SECTION A-A

(SECTION BETWEEN PILES)

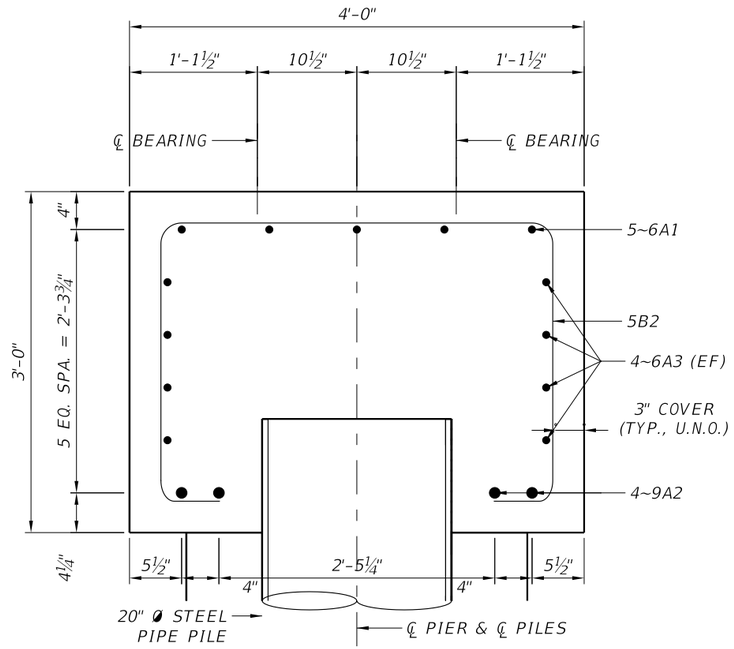


SECTION B-B

(SECTION AT PILES)

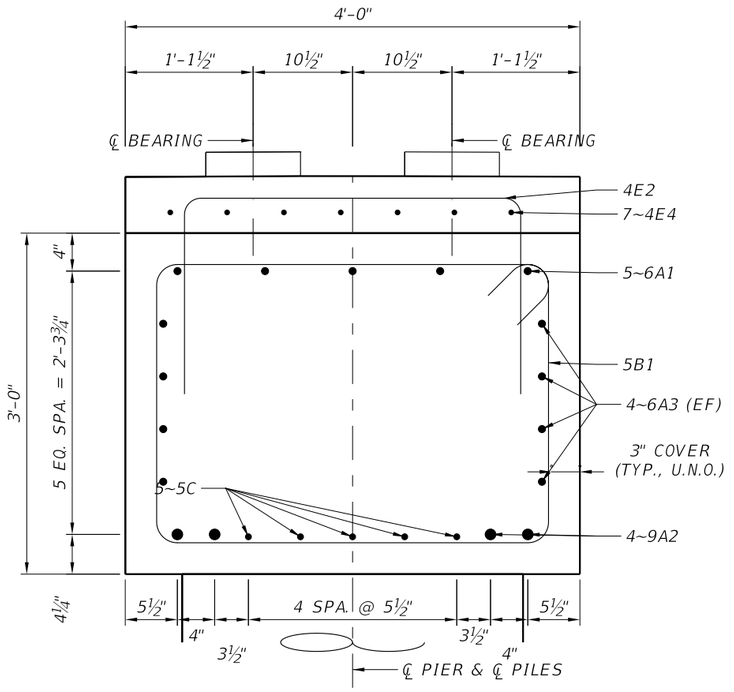


SECTION C-C

(SECTION AT CENTERLINE OF BEAMS)

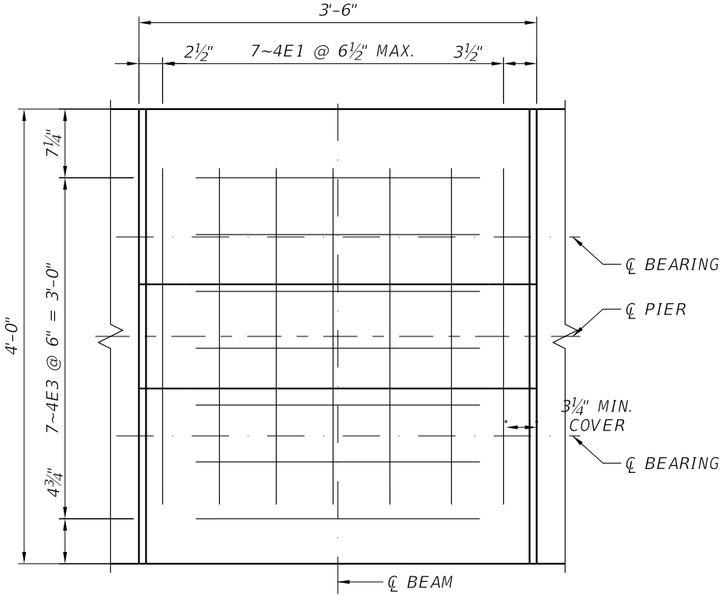

PEDESTAL PLAN

(BEAM LINE 1 SHOWN. PEDESTAL BAR SPACING MAY BE SLIGHTLY ADJUSTED TO CLEAR CONFLICTS WITH MAIN CAP REINFORCEMENT)

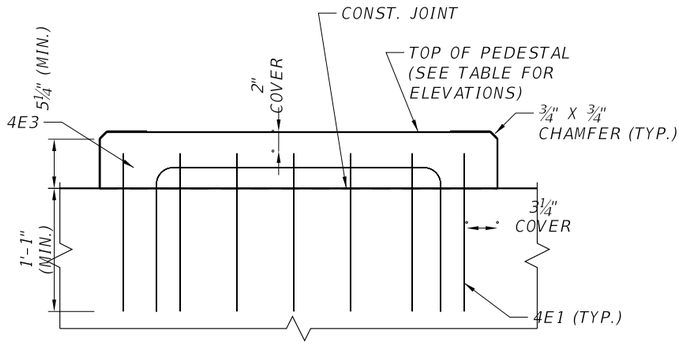

PEDESTAL ELEVATION

TOP OF PEDESTAL ELEVATIONS				
BEAM NO.	ELEVATION (FEET)			
	A	E	F	B
1-1 / 2-1	44.260	44.267	44.266	44.261
1-2 / 2-2	44.260	44.267	44.266	44.261

A AT SPAN 1 EDGE, B AT SPAN 2 EDGE, E AND F AT THE PAD-END BREAKS.

NOTES:

1. FOR LOCATION OF SECTIONS, SEE SHEET B4-4.
2. ALL BARS ARE SHOWN IN SECTIONS; BARS IN THE SECTION PLANE ARE THE NEAREST BAR OF THEIR SERIES WITHIN 1'-3" BEYOND THE CUT.
3. PEDESTALS AT THE OTHER BEAM LINES ARE SIMILAR: 4E2 IN PLACE OF 4E1 AT BEAM LINE 2; 4E4 IN PLACE OF 4E3 AT BEAM LINE 2.
4. PIER WALL IS PROVISIONAL; ITS REINFORCEMENT IS NOT SHOWN.
5. FOR REINFORCING BAR LIST, SEE SHEET B4-9.

BRIDGE NO. _____
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE: PIER DETAILS


REF. DWG. NO.

PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE – B4


SHEET NO. B4-5

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

FREECAD MODEL SHA-256 2D3B6AF8FF550D4B
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.0.0)

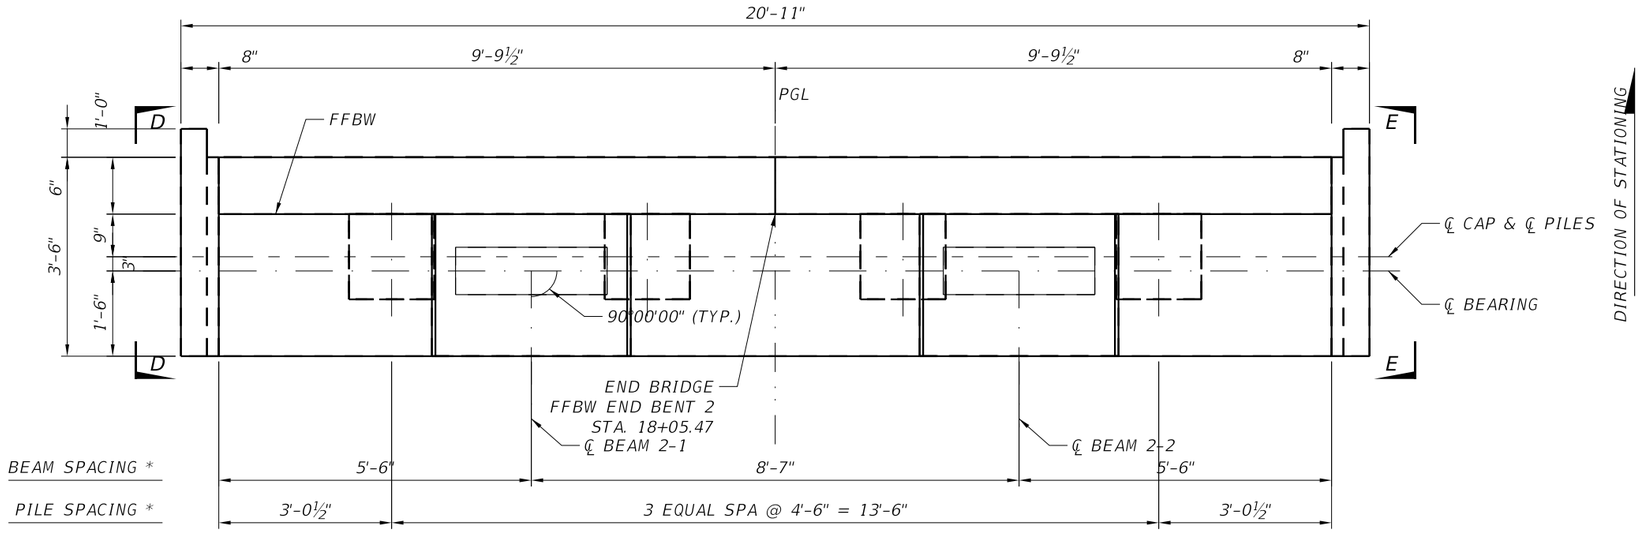

PLAN

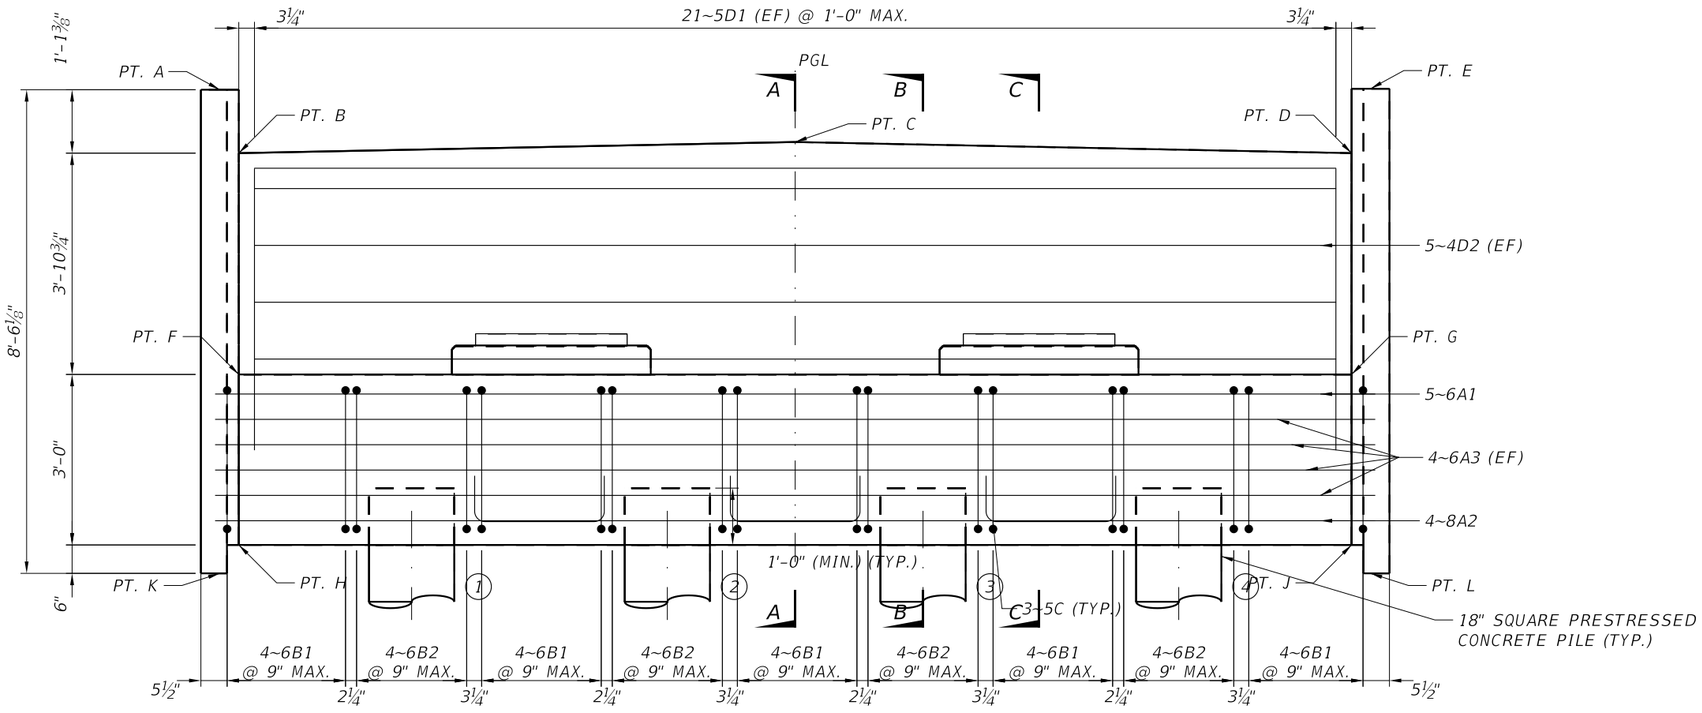

* DIMENSIONS MEASURED ALONG FFBW

ELEVATION

(LOOKING AHEAD STATION)

TABLE OF ELEVATIONS	
POINT	ELEVATION
A	48.260
B	47.144
C	47.340
D	47.144
E	48.277
F	43.250
G	43.250
H	40.250
J	40.250
K	39.750
L	39.750

PILE CUTOFF ELEVATIONS		
PILE NO.	CUTOFF EL.	PGL OFFSET
1	41.2	-6'-9"
2	41.2	-2'-3"
3	41.2	2'-3"
4	41.2	6'-9"

NOTES:

1. STIRRUP SPACING IS DIMENSIONED TO BAR CENTERLINES.
2. REINFORCEMENT IS SHOWN REPRESENTATIVELY: THE FIRST AND LAST BAR OF EACH RUN ARE DRAWN.
3. FOR SECTIONS A-A, B-B AND C-C, SEE SHEET B4-7. FOR VIEWS D-D AND E-E AND PEDESTAL DETAILS, SEE SHEET B4-8.
4. THE SOIL REINFORCEMENT ATTACHED TO THE BACKWALL SHALL BE DESIGNED BY A SPECIALTY ENGINEER FOR A SERVICE LOAD OF ___ K/FT AND A FACTORED LOAD OF ___ K/FT USING THE DESIGN CRITERIA FOR PERMANENT MSE WALLS. COST OF FURNISHING AND INSTALLING THE SOIL REINFORCEMENT IS CONSIDERED INCIDENTAL TO THE COST OF THE END BENT.
5. FOR REINFORCING BAR LIST, SEE SHEET B4-9.
6. PILE OFFSETS ARE FROM THE PGL, + TO THE RIGHT LOOKING UP-STATION. CUTOFF ELEVATIONS ARE TO THE NEAREST 0.1 FT.

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

FREECAD MODEL SHA-256 2D3B6AF8FF550D4B
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.0.0)

BRIDGE NO. _____
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION


ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE: END BENT 2

REF. DWG. NO.


PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4

SHEET NO. B4-6

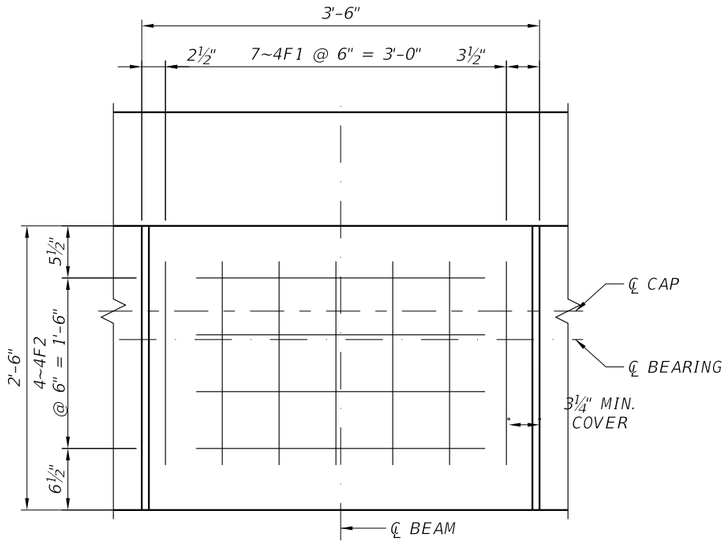

PEDESTAL PLAN


(BEAM LINE 1 SHOWN. PEDESTAL BAR SPACING MAY BE SLIGHTLY ADJUSTED TO CLEAR CONFLICTS WITH MAIN CAP REINFORCEMENT)

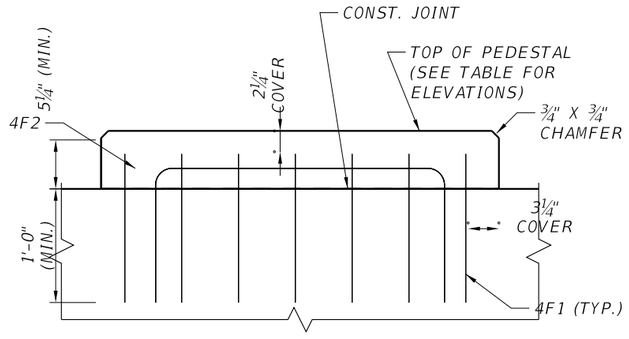

PEDESTAL ELEVATION


TOP OF PEDESTAL ELEVATIONS				
BEAM NO.	ELEVATION (FEET)			
	A	B	C	D
2–1	43.743	43.760	43.743	43.760
2–2	43.743	43.760	43.743	43.760

A, C AT FFBW EDGE; B, D AT SPAN EDGE (LEVEL TRANSVERSELY).

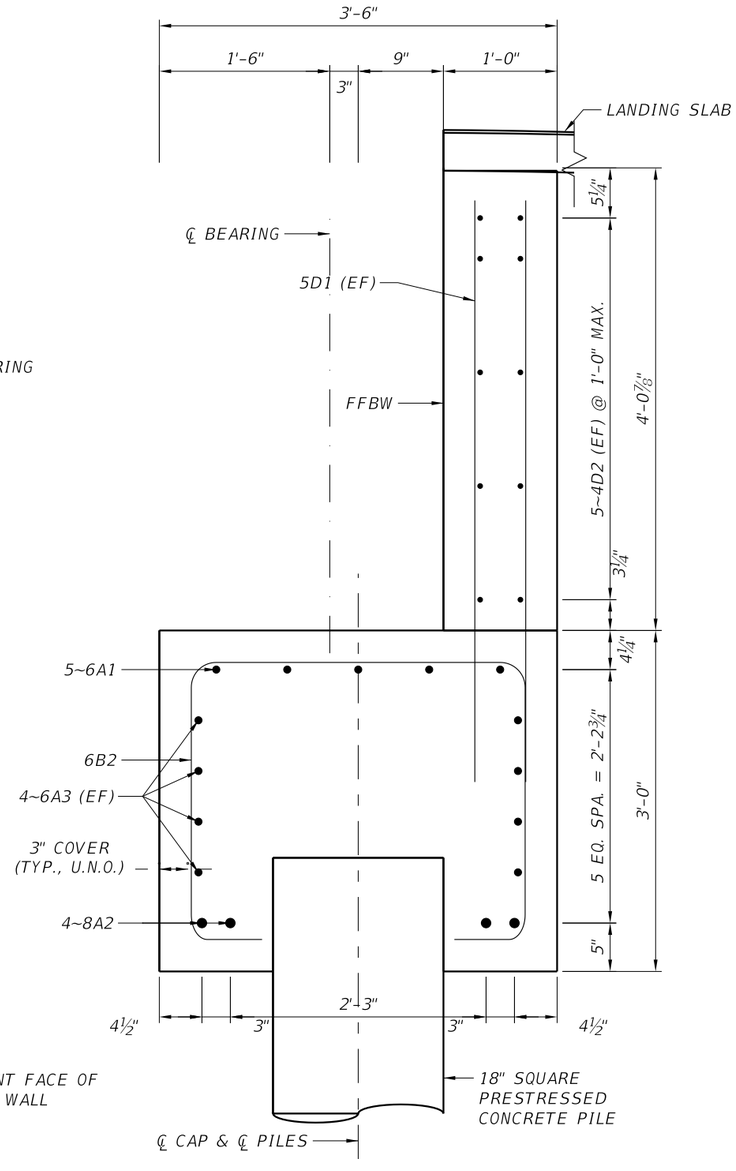

SECTION B-B

(SECTION AT PILES)

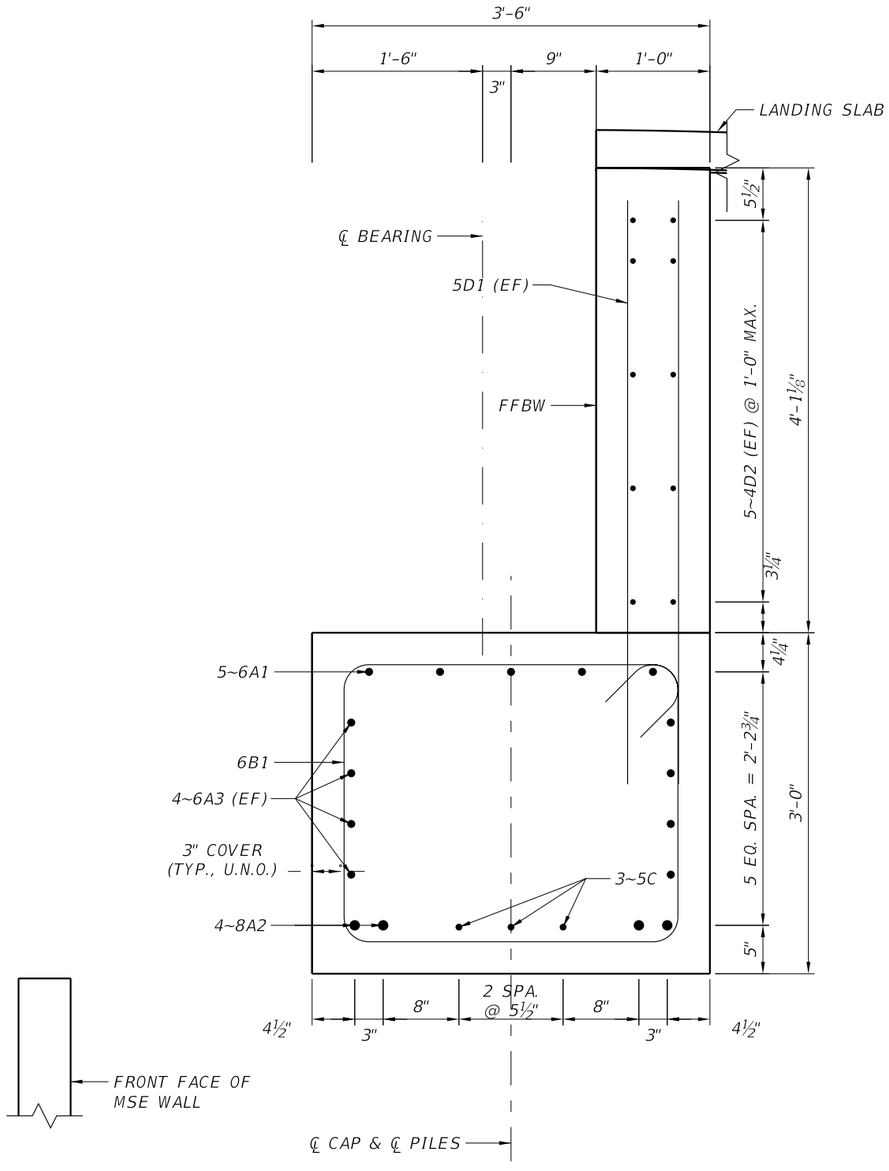

SECTION A-A

(SECTION BETWEEN PILES)

NOTES:

1. FOR LOCATION OF SECTIONS, SEE SHEET B4-6.
2. ALL BARS ARE SHOWN IN SECTIONS; BARS IN THE SECTION PLANE ARE THE NEAREST BAR OF THEIR SERIES WITHIN 1'-3" BEYOND THE CUT.
3. PEDESTALS AT THE OTHER BEAM LINES ARE SIMILAR: 4F3 IN PLACE OF 4F2 AT BEAM LINE 2.
4. PEDESTALS ARE CAST ON THE CAP; THE CAP TOP IS A CONSTRUCTION JOINT.
5. FOR REINFORCING BAR LIST, SEE SHEET B4-9.

BRIDGE NO. _____
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID.

SHEET TITLE: END BENT 2 DETAILS (1 OF 2)


PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE – B4

REF. DWG. NO.


SHEET NO. B4-7

FREECAD MODEL SHA-256 2D3B6AF8FF550D4B
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.0.0)


THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

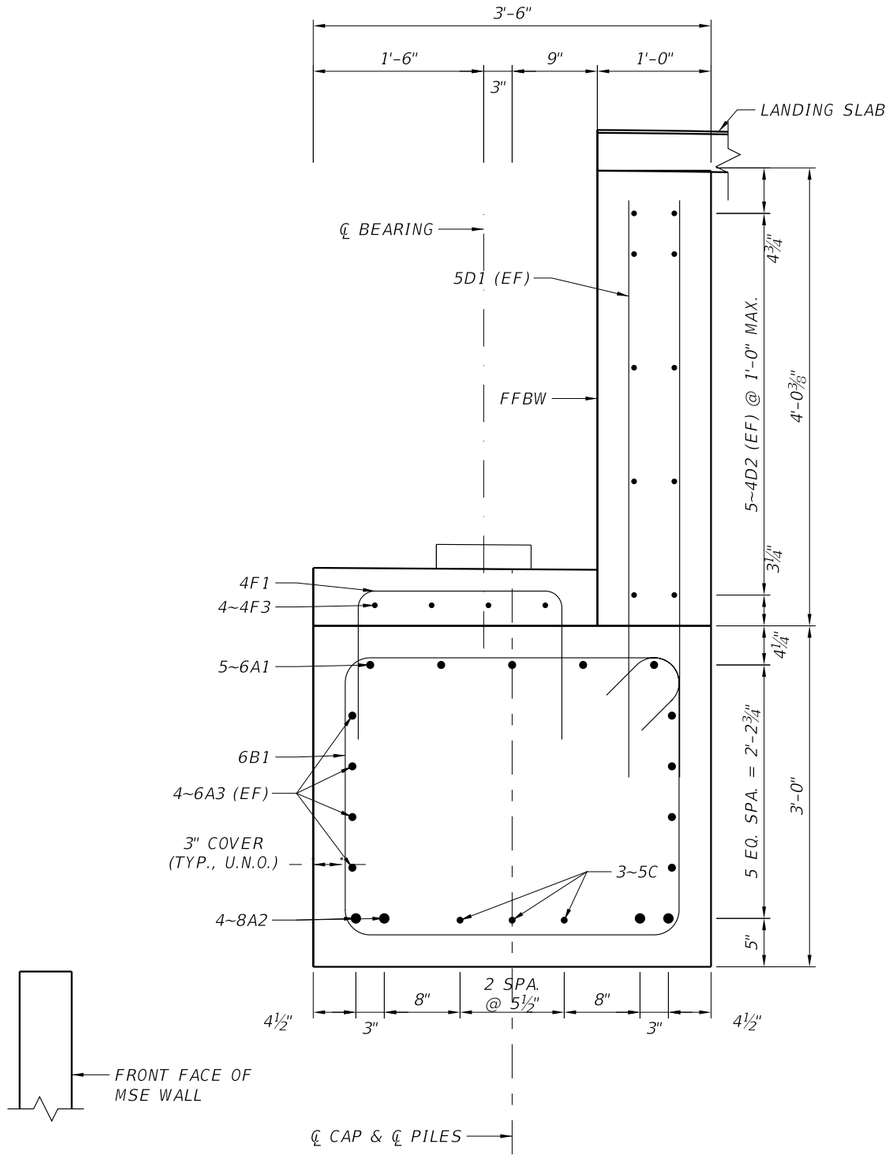

SECTION C-C
(SECTION AT CENTERLINE OF BEAM)

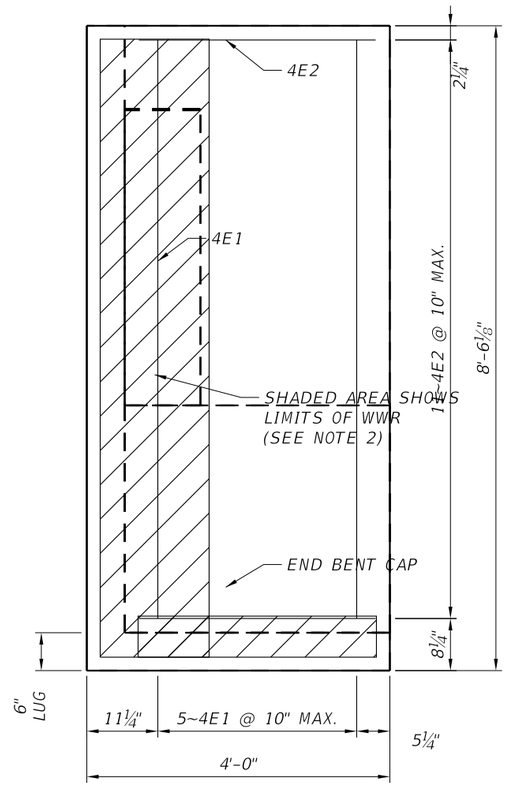

VIEW D-D
(LEFT CHEEK WALL)

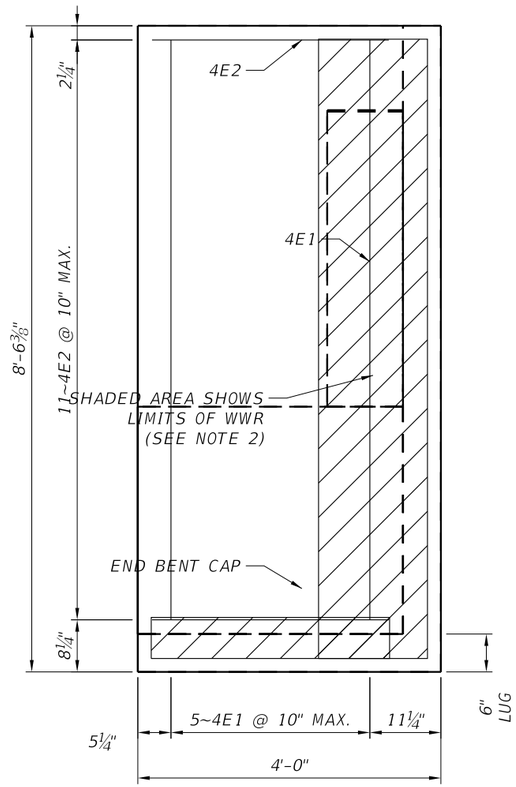

VIEW E-E
(RIGHT CHEEK WALL)

NOTES:

1. FOR LOCATION OF SECTION C–C AND VIEWS D–D AND E–E, SEE SHEET B4-6.
2. WELDED WIRE REINFORCEMENT (WWR) 4x4–W1.4xW1.4 IN THE CHEEK LUGS SHALL BE TIED TO THE END BENT REINFORCING STEEL.
3. FOR CHEEK TOP ELEVATIONS, SEE THE TABLE OF ELEVATIONS, SHEET B4-6.
4. FOR REINFORCING BAR LIST, SEE SHEET B4-9.

BRIDGE NO. _____
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE: END BENT 2 DETAILS (2 OF 2)

PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE – B4

REF. DWG. NO.

SHEET NO. B4-8

FREECAD MODEL SHA-256 2D3B6AF8FF550D4B
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.0.0)


THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

MARK		LENGTH	NO	TYP	STY		B	C	D	E	F	H	J	K	N	∅
SIZE	DES	FT IN	BARS	BAR	A	G	FT IN	FT IN	FT IN	FT IN	FT IN	FT IN	FT IN	FT IN	NO	ANG
END BENT 1 (1 REQUIRED)																
6	A1	20-5	5	1			20-5									
8	A2	20-5	4	1			20-5									
6	A3	20-5	8	1			20-5									
6	B1	11-10	20	4	5	5	2-6	3-0								
6	B2	9-4	16				1-0	2-6	3-0	2-6	1-0					
5	C	3-9	9	11			2-4	0-10	0-10							
5	D1	4-11 TO 5-2	42	1			4-11 TO 5-2									
4	D2	19-1	10	1			19-1									
4	E1	7-8	10	1			7-8									
4	E2	3-2	22	1			3-2									
4	F1	4-3	14	11			1-10	1-4	1-4							
4	F2	4-9	4	11			2-7	1-2½	1-2½							
4	F3	4-8	4	11			2-5½	1-2½	1-2½							
END BENT 2 (1 REQUIRED)																
6	A1	20-5	5	1			20-5									
8	A2	20-5	4	1			20-5									
6	A3	20-5	8	1			20-5									
6	B1	11-10	20	4	5	5	2-6	3-0								
6	B2	9-4	16				1-0	2-6	3-0	2-6	1-0					
5	C	3-9	9	11			2-4	0-10	0-10							
5	D1	4-11 TO 5-2	42	1			4-11 TO 5-2									
4	D2	19-1	10	1			19-1									
4	E1	7-8	10	1			7-8									
4	E2	3-2	22	1			3-2									
4	F1	4-3	14	11			1-10	1-4	1-4							
4	F2	4-9	4	11			2-7	1-2½	1-2½							
4	F3	4-9	4	11			2-6½	1-2½	1-2½							

NOTE:
FOR BAR BENDING DETAILS, REFER TO FDOT STANDARD PLANS INDEX 415-001.

MARK		LENGTH	NO	TYP	STY		B	C	D	E	F	H	J	K	N	∅
SIZE	DES	FT IN	BARS	BAR	A	G	FT IN	FT IN	FT IN	FT IN	FT IN	FT IN	FT IN	FT IN	NO	ANG
PIER (1 REQUIRED)																
6	A1	18-8	5	1			18-8									
9	A2	18-8	4	1			18-8									
6	A3	18-8	8	1			18-8									
5	B1	12-8	24	4	5	5	2-6	3-6								
5	B2	9-8	24				0-10	2-6	3-6	2-6	0-10					
5	C	4-1	15	11			2-8	0-10	0-10							
5	D1	4-10	4	11			3-4¾	0-10	0-10							
5	D2	3-10	6	11			2-4¾	0-10	0-10							
4	E1	5-7	7	11			3-0	1-5	1-5							
4	E2	6-3	7	11			3-0	1-9	1-9							
4	E3	4-11	7	11			2-6½	1-3½	1-3½							
4	E4	5-8	7	11			2-7½	1-7½	1-7½							

OPEN STIRRUP (NOT TO SCALE)

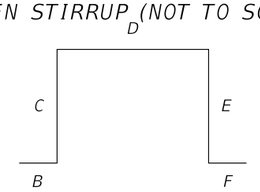

LEGS B AND F TURNED IN PLAN TO CLEAR THE PILE

NOTES:

1. TYP BAR AND STY ARE THE BAR TYPE AND HOOK STYLE OF STANDARD PLANS INDEX 415-001 (FY 2025-26): TYPE 1 STRAIGHT (B = LENGTH), TYPE 4 CLOSED STIRRUP (B = HEIGHT, C = WIDTH), TYPE 11 U-BAR (B = BASE, C AND D = LEGS); STYLE 5 = 135° STIRRUP HOOK.
2. OPEN STIRRUPS HAVE THEIR END LEGS TURNED IN PLAN TO CLEAR THE PILE AND MATCH NO STANDARD TYPE; THEIR DIMENSION LETTERS REFER TO THE BENDING DIAGRAM ON THIS SHEET.
3. LENGTHS ARE THE MODEL CENTERLINE LENGTHS ROUNDED TO THE NEAREST INCH; BEND DIMENSIONS ARE OUT-TO-OUT (SDM 4.3.10.C).
4. VARYING LENGTHS: END BENT 1 5D1: 6 @ 4'-11", 16 @ 5'-0", 16 @ 5'-1", 4 @ 5'-2". END BENT 2 5D1: 6 @ 4'-11", 16 @ 5'-0", 16 @ 5'-1", 4 @ 5'-2".
5. PILES AND THE CHEEK LUG WELDED WIRE REINFORCEMENT ARE NOT INCLUDED IN THIS LIST.

BRIDGE NO. _____
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE: REINFORCING BAR LIST

REF. DWG. NO.

PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE – B4

SHEET NO. B4-9

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

FREECAD MODEL SHA-256 2D3B6AF8FF550D4B
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.0.0)